

COMMUNICATION FIBER OPTICS

PROVIDING FIBER OPTIC SOLUTIONS FOR 40 YEARS



2025-2026
FIBER OPTIC PRODUCT CATALOG
49th Edition



**CABINETS, ENCLOSURES
& SPLICE CASES**

**TEST EQUIPMENT &
FUSION SPLICERS**

**CONSUMABLES
& CONNECTIVITY**

**BULK CABLE AND
FIBER ASSEMBLIES**



**Desk
Reference**



Sales Representatives Are Waiting For Your Call!
Fiber Instrument Sales, Inc.
1-800-5000-FIS(347)

PURCHASE ONLINE
WWW.FIBERINSTRUMENTSALES.COM
FOR OUR FULL LINE OF PRODUCT OFFERINGS

PRESIDENT'S MESSAGE

Dear Customer,

Without question, we all wish that a "Golden Age" becomes the future of our country. Technology is the driving force and Fiber Optics are a major part of that technology. Our participation and desire to succeed is crucial to the outcome.

The government monies dedicated to "Fiber To The Home" projects and the creation of large "Data Centers" is most likely to maximize U.S. Fiber Optic manufacturing and installation capabilities. The rewarded will be the companies that are willing to wisely invest their resources.

Interestingly, sourcing many of our key fiber optic products unique to China presents various challenges. Increased tariffs on China imports will hopefully motivate the U.S. government to clearly define and enforce the clarification of "Made in U.S.A." products. The existing government guidelines are confusing and many. Presently the transfer of products to neighboring countries to avoid tariffs is difficult to confirm.

At Fiber Instrument Sales we expect our customer requirements to significantly increase, creating an exciting 2025-2026. We have a tremendous respect for our partners in business and as always, wish everyone a successful future.

With appreciation,

Frank Giotto
President



Frank Giotto

Frank Giotto
President and CEO

Manufactured At FIS



CABLES

Drop Cable (Pg 101)



Distribution Cable - up to 144 Fiber (Pg 98)



Armored Cable (Pg 100)

CONNECTIVITY



Splice-On
Connectors (Pg 50)



Multi Fiber
Assemblies (Pg 71)



Fan-Out Kits
(Pg 103)

ENCLOSURES



Wall Mount
Enclosure (Pg 68)



Rack Mount
Enclosure (Pg 64)



FTTx Fiber
Management Center
(Pg 80)



Network Cabinet
(Pg 78)

FIBER INSTRUMENT SALES SALES TEAM • SERVICE • SUPPORT

SALES TEAM



Kirk Donley
Senior Vice President
Ext. 2104
kdonley@fissales.com



John Bruno
Vice President of
Training & Technical
Services
FIS University Instructor
Ext. 2157
jbruno@fissales.com



Steve Casaletta
Vice President of
Business Development
PLM Splicing Products
Ext. 2166
scasalletta@fissales.com



Trevor Francis
Vice President of Sales
Strategic Accounts
Ext. 2125
tfrancis@fissales.com



Anthony Russo
Vice President of
Broadband Solutions
PLM FTTx Products
Ext. 2173
arusso@fissales.com



Steve Ermacor
Product Line Manager
Fiber Interconnects &
Strategic Accounts
Ext. 2123
sermacor@fissales.com



Robert Licari
Product Line Manager
Fiber Test Equipment
FIS University Instructor
Ext. 2192
rlinari@fissales.com



Trista Piccione
Product Line Specialist
Fiber Cable Assemblies
Sr. Account Executive
Ext. 2189
tpiccione@fissales.com



Jim Fasano
FTTx Program
Development
Ext. 2143
jfasano@fissales.com



Ric Lamb
Product Line Manager
Fiber Fence
Ext. 2151
rlamb@fissales.com

INTERNATIONAL



Trevor Francis
Vice President of Sales
Strategic Accounts
Ext. 2125
tfrancis@fissales.com



Kayla Angelhow
International Sales
Manager
Ext. 2111
kangelhow@fissales.com



Autumn Fallon
Sales Representative
Ext. 2164
afallon@fissales.com

WEB SALES



Don Shantal
Internet Sales
Ext. 2170
dshantal@fissales.com

RENTALS & SERVICES



John Russo
Rentals & Calibration
Manager
Ext. 2161
jrusso@fissales.com

GOVERNMENT SALES



Cindy Marino
Vice President of
Government Sales
Ext. 2140
cmarino@fissales.com

Region 1 & Region 2 Sales Team



Sue Muraca
Sr. Account Executive
Ext. 2160
smuraca@fissales.com



Sally Fenton
Sr. Account Executive
Ext. 2181
sfenton@fissales.com



Trista Piccione
Product Line Specialist
Fiber Cable Assemblies
Sr. Account Executive
Ext. 2189
tpiccione@fissales.com



John DeMetro
Account Executive
Ext. 2131
jdemetro@fissales.com



Adam Norsen
Sr. Sales Representative
Ext. 2139
anorsen@fissales.com



Calvin Lang Jr.
Sr. Sales Representative
Ext. 2146
clang@fissales.com



Spencer Hawes
Sales Representative
Ext. 2152
shawes@fissales.com



Sarah McDonald
Sales Representative
Ext. 2156
smcdonald@fissales.com

Region 3 & Region 4 Sales Team



Jennifer Stinger
Sr. Account Executive
Ext. 2185
jstinger@fissales.com



Phil Kamp
Account Executive
Ext. 2154
pkamp@fissales.com



Alicia Aldi
Sr. Sales Representative
Ext. 2149
aalldi@fissales.com



Brandon Schmidt
Sr. Sales Representative
Ext. 2145
bschmidt@fissales.com



Amber Corigliano
Sr. Sales Representative
Ext. 2103
acorigliano@fissales.com



Nicolas Alexander
Sales Representative
Ext. 2132
nalexander@fissales.com




Kathleen O'Meara
Sales Representative
Ext. 2126
komeara@fissales.com



Autumn Fallon
Sales Representative
Ext. 2164
afallon@fissales.com



Aaron Willsey
Sales Representative
Ext. 4151
awillsey@fissales.com

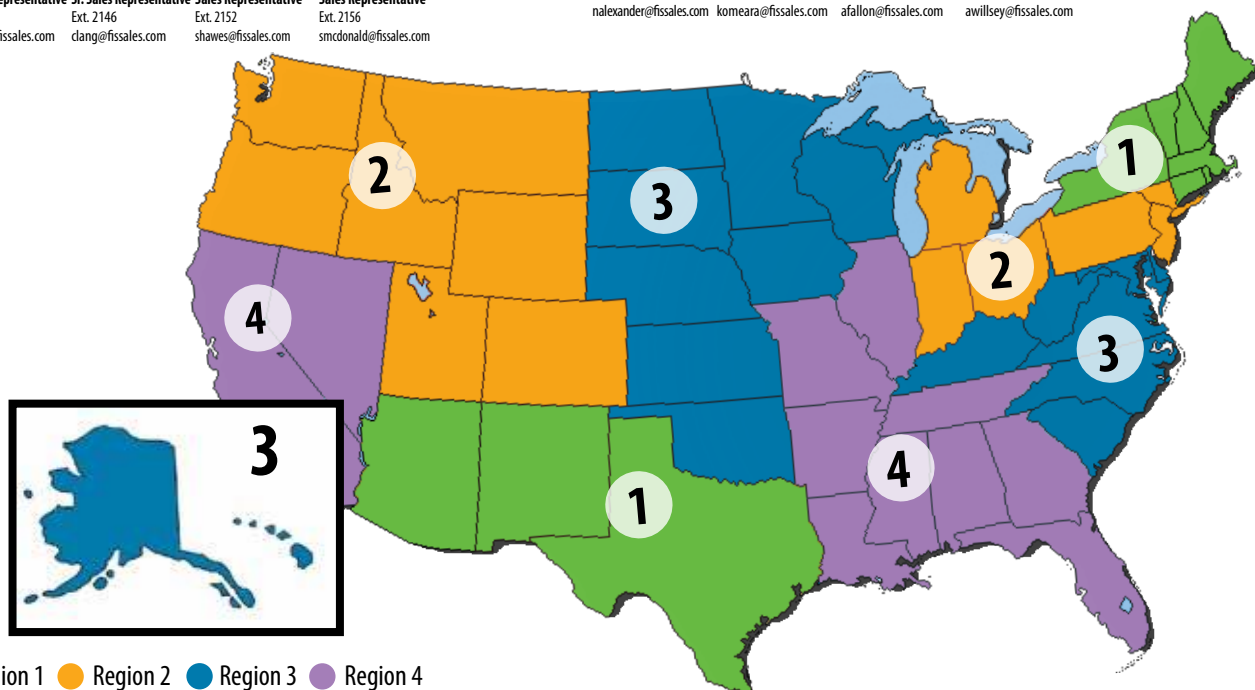

● Region 1 ● Region 2 ● Region 3 ● Region 4



COMPLIANT

FIS Offers Products Compliant With the Build America, Buy America Act

Over the years, FIS Manufacturing has expanded its offerings, including fiber optic cables with Corning optical fiber, pre-connectorized assemblies, metal enclosures, fiber test equipment, and connectors. With a satisfaction guarantee and ISO9001/2015 certification, FIS ensures top quality. Our products help drive broadband growth across the U.S., many of our products meet Buy America Build America requirements for government-funded projects, including BEAD.



**CALL FOR CUSTOM QUOTES!
1-800-5000-FIS(347)**



Fiber Instrument Sales, Inc. is now part of
Corning CAH Connections Gold Program!

- Required for Corning 25-year extended warranty
- Quick turn and shorter lead time
- Customized simplex and duplex cable assemblies

Contact an FIS Sales Representative

Quality, Service, Peace of Mind: Gold Cable Assembler

2025-2026 NEW PRODUCTS

**FIS
FIS xWDM
Channel Analyzers**
pg. 22



**FIS
GEMINI
Bi-Directional LTS**
pgs. 23



**AFL 90S+ Core
Alignment Fusion
SpliceReady Splicer Kit**
pg. 52



**FIS HELIOUS
Outdoor Wall Mount
Enclosure**
pg. 75



**EXFO
FIP-200-A
Probe**
pg. 27



**AFL FlowScout
Optical Loss
Test Kits**
pg. 43



**EZfi
Drop Cable
Assembly System**
pg. 81



**FITEL
S327A Precision
Cleaver**
pg. 60



**AFL APEX X-1
Closures**
pg. 90



**FIS
Network Interface
Device Box
(NID)**
pg. 82



**FIS
Fiber Optic
Simplex/Duplex
Thermal Stripper**
pg. 116



**Corning® OptiSnap™
High-Performance
Connector Toolkit
with Flat Cleaver**
pg. 130



Continuing to be Your **Fiber-Optic Information Source**

Website

www.fiberinstrumentsales.com

In addition to online shopping, the FIS website offers a wealth of information to make your job easier and more productive. Spec sheets, white papers, training videos, and Communicator Newsletter – all are accessible online.



**Shop 24/7
Online**



Live Tech Help

Our sales people and tech support are available by phone as well as online, via our website. You can access our Sales Team, Product Line Managers, Vice Presidents, or President and CEO, Frank Giotto. Just click on the link, "Ask A Question."



Tutorial Videos

Fusion splicing, fiber termination and network testing are just a few of the informative FIS videos available to you. Videos can be accessed through the FIS Website. Clear and concise, FIS tutorial videos are the next best thing to receiving classroom training.



We have a Connection!

With our Video Conference Room FIS is able to provide training and technical support to our customers with ease. This support includes several different types of equipment such as fusion splicers, OTDRs, connector termination kits, and optical loss test sets and much more. **Let us know if you're interested in setting up a video conference call**



You will love our Configurator

Today's network installations sometimes require customized solutions and here at FIS we are ready to put together a solution that will make your job easier. Do you need to connect a piece of equipment that is further away from the enclosure than a standard length patch cable? Let us build you a custom length patch cable! Our standard turnaround time is 2 to 4 business days. Let's make your custom solution together!



Communicator Newsletter

This quarterly publication is a great tool for helping you make informed purchase decisions. For example, various issues of Communicator have provided guidance in selecting the right fusion splicer, OTDR, splice closure and more. Refer to these Communicator "buying guides" when making important purchase decisions. All issues are available in the Communicator Archives on the FIS website.



TABLE OF CONTENTS

Assemblies

Singlemode, ClearCurve®	6
Multimode 10 Gig OM3 / OM4	8
Multimode OM2 / OM1	9
Custom Assemblies	10
MTP Cable Assemblies	12
Mode Conditioning	14
Specialty Optical Assemblies	14
Coupler/Splitter Modules	15
Broadcast/Military & Harsh Environment	16

Test Equipment

OTDRs	20-26, 28-34
Fiber Inspection	21, 27, 30, 31, 44, 45
Pulse / Test Boxes	35
Fiber Optic Identifiers	36
Power Meter & Light Sources	38, 39, 42, 43
MPO Testing	40
Fault Locators	46
Testing Accessories	48

Splicing

Fusion Splicers	50
Splice-On Connectors	50
Cleavers	60
Mechanical Splices	62
Splice Protection Sleeves	63

Enclosures (Indoor)

Rack Mount Enclosures	64, 67
Wall Mount Enclosures	66, 68
Custom Enclosures	67, 68
Adapter Panels	70
Pigtails / Snap Packs	71
Splice Trays	76
Racks	78
Cable Management	79

ZEUS FTTx Solution

Closures (Outdoor)

Home Installation Kit	81
NIDs	82
Outdoor Splice Closures	82-85, 88-91
Drop Cable	83
Couplers/Splitters	86
CWDM/DWDM	87
Vaults & Pedestals	92
Snowshoes	93

Cable

250µm / 900µm / Large Core	95
Simplex / Duplex	96, 99
Distribution	98
Indoor/Outdoor	99
Aluminum Interlocking Armor	100
Outdoor	101
Drop Cable	101
Furcation Tube	102
Breakout / Fanout Kits	103

Consumables

Wipes	104
Cleaning Solutions	105
Dry Cleaners	108
Swabs	110
Cleaning Kits	111

Tools

Tool Kits	112
Stripping & Tools	116
Hand Tools	117
Slitting Tools	117
MidAccess Tools	119
Scribes & Crimpers	120
Hand Tools	121
Cable Pulling	123
Tie Wraps & Accessories	124
Marking and Labeling	125
Tents	127
Innerduct	128
Pulling Eye	128

Connectivity

Splice-On Connectors	50
Quick Termination	129
Standard Connectors	132, 134, 135
Small Form Factor Connectors	133
Boots & Accessories	136
Epoxy	138
Connector Ovens	139
Polishing	140
Adapters	144
Attenuators	149

FIBER FENCE Security

Drilled Ferrules

Copper

Category 5e, 6 / Cable	154
Copper Testing	155
Wall Plates / Jacks	156
Patch Panels	156

Network Equipment

SFPs	157
UBIQUITI Network Equipment	158
Media Converters & Switches	160
Hardened Environment Switches	162
Active Fiber Optic & Copper Assemblies	163

FIS University

Training Classes	164
Training Material	165

Services

Equipment Rentals	166
Calibration	167
Financing	167

ASSEMBLIES

ASSEMBLIES | UPC SINGLEMODE - SIMPLEX & DUPLEX PATCH CABLE



3mm ST-ST UPC SIMPLEX

PART #	LENGTH	PRICE
S98U8US1FISCU	1 Meter	\$3.85
S98U8US2FISCU	2 Meters	3.95
S98U8US3FISCU	3 Meters	4.10
S98U8US5FISCU	5 Meters	4.30
S98U8US10FISCU	10 Meters	4.90



3mm ST-SC UPC SIMPLEX

PART #	LENGTH	PRICE
S98UYUS1FISCU	1 Meter	\$3.85
S98UYUS2FISCU	2 Meters	3.95
S98UYUS3FISCU	3 Meters	4.10
S98UYUS5FISCU	5 Meters	4.30
S98UYUS10FISCU	10 Meters	4.90



3mm SC-SC UPC SIMPLEX

PART #	LENGTH	PRICE
S9YUYUS1FISCU	1 Meter	\$3.85
S9YUYUS2FISCU	2 Meters	3.95
S9YUYUS3FISCU	3 Meters	4.05
S9YUYUS5FISCU	5 Meters	4.30
S9YUYUS10FISCU	10 Meters	4.90



1.6mm LC-LC UPC SIMPLEX

PART #	LENGTH	PRICE
Y9LULUS1FISCU	1 Meter	\$4.35
Y9LULUS2FISCU	2 Meters	4.50
Y9LULUS3FISCU	3 Meters	4.60
Y9LULUS5FISCU	5 Meters	4.85
Y9LULUS10FISCU	10 Meters	5.45



1.6mm LC-SC UPC SIMPLEX

PART #	LENGTH	PRICE
Y9LUYUS1FISCU	1 Meter	\$4.10
Y9LUYUS2FISCU	2 Meters	4.20
Y9LUYUS3FISCU	3 Meters	4.35
Y9LUYUS5FISCU	5 Meters	4.60
Y9LUYUS10FISCU	10 Meters	5.20



3mm FC-FC UPC SIMPLEX

PART #	LENGTH	PRICE
S97U7US1FISCU	1 Meter	\$3.85
S97U7US2FISCU	2 Meters	3.95
S97U7US3FISCU	3 Meters	4.10
S97U7US5FISCU	5 Meters	4.30
S97U7US10FISCU	10 Meters	4.90

CORNING® SMF-28® ULTRA FIBER SM PATCH CABLES



1.6mm LC-SC UPC DUPLEX

PART #	LENGTH	PRICE
X9LUYUS1FISCU	1 Meter	\$8.15
X9LUYUS2FISCU	2 Meters	8.40
X9LUYUS3FISCU	3 Meters	8.65
X9LUYUS5FISCU	5 Meters	9.15
X9LUYUS10FISCU	10 Meters	10.35



1.6mm LC-LC UPC DUPLEX

PART #	LENGTH	PRICE
X9LULUS1FISCU	1 Meter	\$8.75
X9LULUS2FISCU	2 Meters	8.90
X9LULUS3FISCU	3 Meters	9.20
X9LULUS5FISCU	5 Meters	9.65
X9LULUS10FISCU	10 Meters	10.85



1.6mm LC-LC UPC UNI-BOOT DUPLEX

PART #	LENGTH	PRICE
X9LULUS1FISCUNI	1 Meter	\$12.90
X9LULUS2FISCUNI	2 Meters	13.15
X9LULUS3FISCUNI	3 Meters	13.35
X9LULUS5FISCUNI	5 Meters	13.85
X9LULUS10FISCUNI	10 Meters	15.10



3mm SC-SC UPC DUPLEX

PART #	LENGTH	PRICE
D9YUYUS1FISCU	1 Meter	\$7.65
D9YUYUS2FISCU	2 Meters	7.95
D9YUYUS3FISCU	3 Meters	8.15
D9YUYUS5FISCU	5 Meters	8.60
D9YUYUS10FISCU	10 Meters	9.80



3mm ST-ST UPC DUPLEX

PART #	LENGTH	PRICE
D98U8US1FISCU	1 Meter	\$7.65
D98U8US2FISCU	2 Meters	7.95
D98U8US3FISCU	3 Meters	8.20
D98U8US5FISCU	5 Meters	8.70
D98U8US10FISCU	10 Meters	9.95



3mm ST-SC UPC DUPLEX

PART #	LENGTH	PRICE
D98UYUS1FISCU	1 Meter	\$7.70
D98UYUS2FISCU	2 Meters	7.95
D98UYUS3FISCU	3 Meters	8.15
D98UYUS5FISCU	5 Meters	8.60
D98UYUS10FISCU	10 Meters	9.80



3mm FC-FC UPC DUPLEX

PART #	LENGTH	PRICE
D97U7US1FISCU	1 Meter	\$7.70
D97U7US2FISCU	2 Meters	7.95
D97U7US3FISCU	3 Meters	8.20
D97U7US5FISCU	5 Meters	8.70
D97U7US10FISCU	10 Meters	9.95



1.6mm LC-LC APC SIMPLEX

PART #	LENGTH	PRICE
Y9LALAS1FISCU	1 Meter	\$4.70
Y9LALAS2FISCU	2 Meters	4.85
Y9LALAS3FISCU	3 Meters	4.95
Y9LALAS5FISCU	5 Meters	5.20
Y9LALAS10FISCU	10 Meters	5.80



3mm SC-SC APC SIMPLEX

PART #	LENGTH	PRICE
S9YAYAS1FISCU	1 Meter	\$4.25
S9YAYAS2FISCU	2 Meters	4.35
S9YAYAS3FISCU	3 Meters	4.50
S9YAYAS5FISCU	5 Meters	4.75
S9YAYAS10FISCU	10 Meters	5.35



3mm FC-FC APC SIMPLEX

PART #	LENGTH	PRICE
S97A7AS1FISCU	1 Meter	\$4.25
S97A7AS2FISCU	2 Meters	4.35
S97A7AS3FISCU	3 Meters	4.50
S97A7AS5FISCU	5 Meters	4.75
S97A7AS10FISCU	10 Meters	5.35



1.6mm LC-LC APC DUPLEX

PART #	LENGTH	PRICE
X9LALAS1FISCU	1 Meter	\$9.40
X9LALAS2FISCU	2 Meters	9.65
X9LALAS3FISCU	3 Meters	9.90
X9LALAS5FISCU	5 Meters	10.40
X9LALAS10FISCU	10 Meters	11.65



3mm SC-SC APC DUPLEX

PART #	LENGTH	PRICE
D9YAYAS1FISCU	1 Meter	\$8.45
D9YAYAS2FISCU	2 Meters	8.70
D9YAYAS3FISCU	3 Meters	8.95
D9YAYAS5FISCU	5 Meters	9.45
D9YAYAS10FISCU	10 Meters	10.65



3mm FC-SC APC DUPLEX

PART #	LENGTH	PRICE
D97AYAS1FISCU	1 Meter	\$8.50
D97AYAS2FISCU	2 Meters	8.80
D97AYAS3FISCU	3 Meters	9.10
D97AYAS5FISCU	5 Meters	9.70
D97AYAS10FISCU	10 Meters	11.15

CORNING® SMF-28® ULTRA FIBER SM PATCH CABLES



1.6mm SC/APC - LC/UPC SIMPLEX

PART #	LENGTH	PRICE
Y9YALUS1FISCU	1 Meter	\$4.30
Y9YALUS2FISCU	2 Meters	4.40
Y9YALUS3FISCU	3 Meters	4.55
Y9YALUS5FISCU	5 Meters	4.80
Y9YALUS10FISCU	10 Meters	5.40



1.6mm LC-SC APC SIMPLEX

PART #	LENGTH	PRICE
Y9YALAS1FISCU	1 Meter	\$4.50
Y9YALAS2FISCU	2 Meters	4.60
Y9YALAS3FISCU	3 Meters	4.75
Y9YALAS5FISCU	5 Meters	4.95
Y9YALAS10FISCU	10 Meters	5.60



3mm FC-SC APC SIMPLEX

PART #	LENGTH	PRICE
S9YA7AS1FISCU	1 Meter	\$4.25
S9YA7AS2FISCU	2 Meters	4.35
S9YA7AS3FISCU	3 Meters	4.50
S9YA7AS5FISCU	5 Meters	4.75
S9YA7AS10FISCU	10 Meters	5.35



1.6mm LC/APC - SC/UPC DUPLEX

PART #	LENGTH	PRICE
X9LAYUS1FISCU	1 Meter	\$8.50
X9LAYUS2FISCU	2 Meters	8.75
X9LAYUS3FISCU	3 Meters	9.00
X9LAYUS5FISCU	5 Meters	9.50
X9LAYUS10FISCU	10 Meters	10.70



1.6mm LC-LC APC UNI-BOOT DUPLEX

PART #	LENGTH	PRICE
X9LALAS1FISCUNI	1 Meter	\$13.85
X9LALAS2FISCUNI	2 Meters	14.10
X9LALAS3FISCUNI	3 Meters	14.35
X9LALAS5FISCUNI	5 Meters	14.80
X9LALAS10FISCUNI	10 Meters	16.00



1.6mm SC-SC PC SIMPLEX - 50µm OM3

PART #	LENGTH	PRICE
Y8YYM1FISC	1 Meter	\$3.65
Y8YYM2FISC	2 Meters	4.00
Y8YYM3FISC	3 Meters	4.20
Y8YYM5FISC	5 Meters	5.05
Y8YYM10FISC	10 Meters	6.75



1.6mm LC-LC PC SIMPLEX - 50µm OM3

PART #	LENGTH	PRICE
Y8LLM1FISC	1 Meter	\$4.15
Y8LLM2FISC	2 Meters	4.85
Y8LLM3FISC	3 Meters	4.85
Y8LLM5FISC	5 Meters	5.50
Y8LLM10FISC	10 Meters	7.25



1.6mm ST-ST PC SIMPLEX - 50µm OM3

PART #	LENGTH	PRICE
Y888M1FISC	1 Meter	\$3.70
Y888M2FISC	2 Meters	4.00
Y888M3FISC	3 Meters	4.35
Y888M5FISC	5 Meters	5.05
Y888M10FISC	10 Meters	6.75



1.6mm LC-SC PC SIMPLEX - 50µm OM3

PART #	LENGTH	PRICE
Y8LYM1FISC	1 Meter	\$3.90
Y8LYM2FISC	2 Meters	4.10
Y8LYM3FISC	3 Meters	4.60
Y8LYM5FISC	5 Meters	5.20
Y8LYM10FISC	10 Meters	7.00



1.6mm SC-ST PC SIMPLEX - 50µm OM3

PART #	LENGTH	PRICE
Y8Y8M1FISC	1 Meter	\$3.70
Y8Y8M2FISC	2 Meters	4.00
Y8Y8M3FISC	3 Meters	4.35
Y8Y8M5FISC	5 Meters	5.05
Y8Y8M10FISC	10 Meters	6.75



1.6mm LC-ST PC SIMPLEX - 50µm OM3

PART #	LENGTH	PRICE
Y8L8M1FISC	1 Meter	\$3.90
Y8L8M2FISC	2 Meters	4.20
Y8L8M3FISC	3 Meters	4.60
Y8L8M5FISC	5 Meters	5.30
Y8L8M10FISC	10 Meters	7.00



1.6mm ST-ST PC DUPLEX - 50µm OM3

PART #	LENGTH	PRICE
X888M1FISC	1 Meter	\$7.35
X888M2FISC	2 Meters	8.00
X888M3FISC	3 Meters	8.70
X888M5FISC	5 Meters	10.10
X888M10FISC	10 Meters	13.50



1.6mm SC-ST PC DUPLEX - 50µm OM3

PART #	LENGTH	PRICE
X8Y8M1FISC	1 Meter	\$7.35
X8Y8M2FISC	2 Meters	8.00
X8Y8M3FISC	3 Meters	8.70
X8Y8M5FISC	5 Meters	10.10
X8Y8M10FISC	10 Meters	13.50



1.6mm LC-ST PC DUPLEX - 50µm OM3

PART #	LENGTH	PRICE
X8L8M1FISC	1 Meter	\$7.80
X8L8M2FISC	2 Meters	8.50
X8L8M3FISC	3 Meters	9.20
X8L8M5FISC	5 Meters	11.35
X8L8M10FISC	10 Meters	13.95



1.6mm SC-SC PC DUPLEX - 50µm OM3

PART #	LENGTH	PRICE
X8YYM1FISC	1 Meter	\$6.25
X8YYM2FISC	2 Meters	8.00
X8YYM3FISC	3 Meters	8.70
X8YYM5FISC	5 Meters	10.10
X8YYM10FISC	10 Meters	13.50

1.6mm SC-SC PC DUPLEX - 50µm OM4

X10YYM1FISC	1 Meter	\$7.65
X10YYM2FISC	2 Meters	8.70
X10YYM3FISC	3 Meters	9.70
X10YYM5FISC	5 Meters	11.75
X10YYM10FISC	10 Meters	16.80



1.6mm LC-LC PC DUPLEX - 50µm OM3

PART #	LENGTH	PRICE
X8LLM1FISC	1 Meter	\$8.30
X8LLM2FISC	2 Meters	8.95
X8LLM3FISC	3 Meters	9.65
X8LLM5FISC	5 Meters	11.00
X8LLM10FISC	10 Meters	14.45

1.6mm LC-LC PC DUPLEX - 50µm OM4

X10LLM1FISC	1 Meter	\$8.65
X10LLM2FISC	2 Meters	10.55
X10LLM3FISC	3 Meters	10.65
X10LLM5FISC	5 Meters	12.70
X10LLM10FISC	10 Meters	17.75



1.6mm LC-SC PC DUPLEX - 50µm OM3

PART #	LENGTH	PRICE
X8LYM1FISC	1 Meter	\$7.80
X8LYM2FISC	2 Meters	8.50
X8LYM3FISC	3 Meters	9.20
X8LYM5FISC	5 Meters	10.55
X8LYM10FISC	10 Meters	11.25

1.6mm LC-SC PC DUPLEX - 50µm OM4

X10LYM1FISC	1 Meter	\$8.15
X10LYM2FISC	2 Meter	9.15
X10LYM3FISC	3 Meter	10.20
X10LYM5FISC	5 Meter	12.20
X10LYM10FISC	10 Meter	17.30

3MM ST-ST SIMPLEX - 50µm OM2

PART #	LENGTH	PRICE
S188M1FISC	1 Meter	\$3.60
S188M2FISC	2 Meters	3.85
S188M3FISC	3 Meters	4.10
S188M5FISC	5 Meters	4.65
S188M10FISC	10 Meters	5.90

3MM ST-ST SIMPLEX - 62.5µm OM1

S288M1FISC	1 Meter	\$3.60
S288M2FISC	2 Meters	3.85
S288M3FISC	3 Meters	4.10
S288M5FISC	5 Meters	4.65
S288M10FISC	10 Meters	5.90



3MM SC-SC SIMPLEX - 50µm OM2

PART #	LENGTH	PRICE
S1YYM1FISC	1 Meter	\$3.60
S1YYM2FISC	2 Meters	3.85
S1YYM3FISC	3 Meters	4.10
S1YYM5FISC	5 Meters	4.60
S1YYM10FISC	10 Meters	5.90

3MM SC-SC SIMPLEX - 62.5µm OM1

S2YYM1FISC	1 Meter	\$3.60
S2YYM2FISC	2 Meters	3.85
S2YYM3FISC	3 Meters	4.10
S2YYM5FISC	5 Meters	4.60
S2YYM10FISC	10 Meters	5.90



1.6MM LC-LC SIMPLEX - 50µm OM2

PART #	LENGTH	PRICE
Y1LLM1FISC	1 Meter	\$4.10
Y1LLM2FISC	2 Meters	4.30
Y1LLM3FISC	3 Meters	4.60
Y1LLM5FISC	5 Meters	5.10
Y1LLM10FISC	10 Meters	6.35

1.6MM LC-LC SIMPLEX - 62.5µm OM1

Y2LLM1FISC	1 Meter	\$4.10
Y2LLM2FISC	2 Meters	4.30
Y2LLM3FISC	3 Meters	4.60
Y2LLM5FISC	5 Meters	5.10
Y2LLM10FISC	10 Meters	6.35



CUSTOM LENGTHS
AVAILABLE

3MM ST-ST DUPLEX - 50µm OM2

PART #	LENGTH	PRICE
D188M1FISC	1 Meter	\$7.15
D188M2FISC	2 Meters	7.65
D188M3FISC	3 Meters	8.20
D188M5FISC	5 Meters	9.20
D188M10FISC	10 Meters	11.70

3MM ST-ST DUPLEX - 62.5µm OM1

D288M1FISC	1 Meter	\$7.15
D288M2FISC	2 Meters	8.60
D288M3FISC	3 Meters	8.20
D288M5FISC	5 Meters	9.20
D288M10FISC	10 Meters	12.90

3MM SC-SC DUPLEX - 50µm OM2

PART #	LENGTH	PRICE
D1YYM1FISC	1 Meter	\$7.20
D1YYM2FISC	2 Meters	7.70
D1YYM3FISC	3 Meters	8.20
D1YYM5FISC	5 Meters	9.20
D1YYM10FISC	10 Meters	11.70

3MM SC-SC DUPLEX - 62.5µm OM1

D2YYM1FISC	1 Meter	\$7.15
D2YYM2FISC	2 Meters	7.65
D2YYM3FISC	3 Meters	8.20
D2YYM5FISC	5 Meters	9.20
D2YYM10FISC	10 Meters	10.60

1.6MM LC-LC DUPLEX - 50µm OM2

PART #	LENGTH	PRICE
X1LLM1FISC	1 Meter	\$8.10
X1LLM2FISC	2 Meters	8.65
X1LLM3FISC	3 Meters	9.15
X1LLM5FISC	5 Meters	10.15
X1LLM10FISC	10 Meters	12.65

1.6MM LC-LC DUPLEX - 62.5µm OM1

X2LLM1FISC	1 Meter	\$8.10
X2LLM2FISC	2 Meters	8.60
X2LLM3FISC	3 Meters	9.10
X2LLM5FISC	5 Meters	10.15
X2LLM10FISC	10 Meters	12.70

QUANTITY PRICING
IN STOCK

HYBRID PATCH CABLE



3MM ST-SC SIMPLEX - 62.5µm OM1

PART #	LENGTH	PRICE
S28YM1FISC	1 Meter	\$3.60
S28YM2FISC	2 Meters	3.85
S28YM3FISC	3 Meters	4.10
S28YM5FISC	5 Meters	4.60
S28YM10FISC	10 Meters	5.90

1.6MM ST-LC SIMPLEX - 62.5µm OM1

PART #	LENGTH	PRICE
Y28LM1FISC	1 Meter	\$3.85
Y28LM2FISC	2 Meters	4.10
Y28LM3FISC	3 Meters	4.35
Y28LM5FISC	5 Meters	4.85
Y28LM10FISC	10 Meters	6.15

1.6MM SC-LC SIMPLEX - 62.5µm OM1

PART #	LENGTH	PRICE
Y2YLM1FISC	1 Meter	\$3.85
Y2YLM2FISC	2 Meters	4.10
Y2YLM3FISC	3 Meters	4.35
Y2YLM5FISC	5 Meters	4.85
Y2YLM10FISC	10 Meters	6.15

3MM ST-SC DUPLEX - 50µm OM2

PART #	LENGTH	PRICE
D18YM1FISC	1 Meter	\$7.20
D18YM2FISC	2 Meters	7.65
D18YM3FISC	3 Meters	8.15
D18YM5FISC	5 Meters	9.20
D18YM10FISC	10 Meters	12.20

1.6MM ST-LC DUPLEX - 50µm OM2

PART #	LENGTH	PRICE
X18LM1FISC	1 Meter	\$7.05
X18LM2FISC	2 Meters	8.15
X18LM3FISC	3 Meters	8.65
X18LM5FISC	5 Meters	9.70
X18LM10FISC	10 Meters	11.25

1.6MM SC-LC DUPLEX - 50µm OM2

PART #	LENGTH	PRICE
X1YLM1FISC	1 Meter	\$7.65
X1YLM2FISC	2 Meters	7.55
X1YLM3FISC	3 Meters	8.00
X1YLM5FISC	5 Meters	8.95
X1YLM10FISC	10 Meters	12.20

3MM ST-SC DUPLEX - 62.5µm OM1

D28YM1FISC	1 Meter	\$7.15
D28YM2FISC	2 Meters	7.65
D28YM3FISC	3 Meters	8.20
D28YM5FISC	5 Meters	9.20
D28YM10FISC	10 Meters	11.70

1.6MM ST-LC DUPLEX - 62.5µm OM1

X28LM1FISC	1 Meter	\$7.70
X28LM2FISC	2 Meters	8.20
X28LM3FISC	3 Meters	9.45
X28LM5FISC	5 Meters	9.65
X28LM10FISC	10 Meters	12.20

1.6MM SC-LC DUPLEX - 62.5µm OM1

X2YLM1FISC	1 Meter	\$7.65
X2YLM2FISC	2 Meters	8.20
X2YLM3FISC	3 Meters	8.65
X2YLM5FISC	5 Meters	10.45
X2YLM10FISC	10 Meters	12.20



MANUFACTURER OF CABLE ASSEMBLIES

Largest Manufacturer and Leading Supplier of Cable Assemblies in the USA.

• WE ARE FLEXIBLE

- Wide Selection of components from leading manufacturers
- Ability to build to Engineering specifications or drawings
- From a quantity of 1 or 1,000's FIS can deliver

• WE HAVE FAST DELIVERY / HIGH QUALITY

- Cables are ready to ship nationwide and internationally in as little as 2-4 days
- 100% inspection and tested to industry standards
- ISO 9001-2015 Certified
- Over 30 years of cable assembly experience

• ADDITIONAL SERVICES WE OFFER

- Termination of Customer Supplied Materials
- Engineered drawings of assemblies
- Custom packaging, labeling
- Experienced engineering team to help design an assembly for any application

STANDARD CONFIGURATIONS

Standard configurations (typical lead-time 2-4 days) – Convert your next project to “plug n’ go” by having your cable assemblies pre-terminated by FIS. Our expert technicians prepare assemblies from a 1-fiber patch cable to 144-fiber assemblies, while offering a wide array of components for you to create the perfect assembly for your application.

CUSTOM CONFIGURATIONS

Our custom abilities include but are not limited to labeling, packaging, testing requirements, and building to customer supplied specifications and drawings.

SPECIFICATIONS

LENGTH

SIMPLEX/DUPLEX

TOTAL LENGTH = -0/+3" (< 5 MTRS),
-0/+10% (> 5 MTRS)

MULTIFIBER

TOTAL LENGTH = -0/+3" (< 5 MTRS), -0/+10% (> 5 MTRS)
BREAKOUT = 1 MTR (-0/+3")
MAXIMUM CONNECTOR TO CONNECTOR STAGGER = 1.5"

TESTING

INSERTION LOSS

MULTIMODE = ≤ 0.4 dB (TYPICAL)
SINGLEMODE = ≤ 0.3 dB (TYPICAL)

RETURN LOSS

PC = ≤ -25dB
UPC = ≤ -55dB
APC = ≤ -60dB

CUSTOM FIBER OPTIC CABLE USE THIS CHART TO BUILD THE CABLE YOU

CABLE TYPE	
S	
GS =	Corning Gold Simplex
GD =	Corning Gold Duplex
E =	250um Bare Fiber
N =	900um Buffered Fiber
Z =	1.2mm Simplex
Y =	1.6mm Simplex
F =	1.8mm Simplex
T =	2.0mm Simplex
S =	3.0mm Simplex
X =	1.6mm Duplex
H =	1.8mm Duplex
V =	2.0mm Duplex
D =	3.0mm Duplex
PM =	Polarization Maintaining
LZ =	LSZH Cable
B =	Breakout
MD =	MicroDistribution
HD =	High Density MicroDistribution
C =	Distribution
R =	Ribbon
RF =	Ribbon Fan Out
TB =	Tactical/Broadcast Cable
FD =	Flat Drop Cable
ENC =	Epoxy Node Cable
IG =	Indoor/Outdoor 250um
I =	Indoor/Outdoor 900um
L =	Loose Tube
AER =	Aerial

ARMOR
A = Armor

See Pages
12 & 13
For MTP
Assemblies



USCONEC

Choose "RL"
For Polarity
Reversible LC

FIBER TYPE
3
1=50/125µm - OM2
2=62.5/125µm - OM1
3=8-9/125µm - OS2
4=Other
5=100/140µm
6=200/230µm
7=960/1000µm (plastic)
8=50µm 10Gig - OM3 (Bend Insensitive)
9=Singlemode (Ultra-Bend Insensitive)
10=50µm 10Gig - OM4 (Bend Insensitive)
12= 50µm10Gig - OM5 (Bend Insensitive)

CONNECTOR SIDE A / SIDE B	
7A	8U
1=SMA905	F=Ferrule Only
2=SMA906	9A=PM-FC/APC
4=FC/Stainless Alloy	9U=PM-FC/UPC
5=ST/Stainless Alloy	P=Pigtail
7=FC/PC	AA=High Performance FC/APC (decreases ORL)
7A=FC/APC	BA=High Performance SC/APC (decreases ORL)
7U=FC/UPC	EA=E2000/APC
8=ST/PC	EU=E2000/UPC
8A=ST/APC	MJ=MTRJ (no pins)
8U=ST/UPC	MP=MTRJ (w/pins)
Y=SC/PC	MDC = MDC
YA=SC/APC	MA = MDC/APC
YU=SC/UPC	SLA = Short Boot LC/APC
D=SC Duplex w/ Clips	SLU = Short Boot LC/UPC
L=LC/PC	SYA = Short Boot SC/APC
LA=LC/APC	SYU = Short Boot SC/UPC
LU=LC/UPC	
C=LC Duplex w/ Clips	
CU=LC Duplex w/Uniboot	
RL=Polarity Reverse/ Push Pull Boot LC	

Note: Choose two connector styles from the chart one for Connector Side A and one for Connector Side B.



CONFIGURATION ILLUSTRATION




CLIPPED DUPLEX PATCH CABLE

Standard Polarity A to B / B to A




SIMPLEX PATCH CABLE




UNCLIPPED DUPLEX PATCH CABLE

Epoxy Node Cable

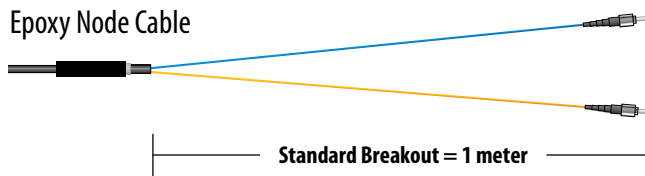


NODE CABLE ASSEMBLY



DISTRIBUTION - INDOOR/OUTDOOR ASSEMBLY

2-144 Fiber (ex. 6 Fiber Assembly)

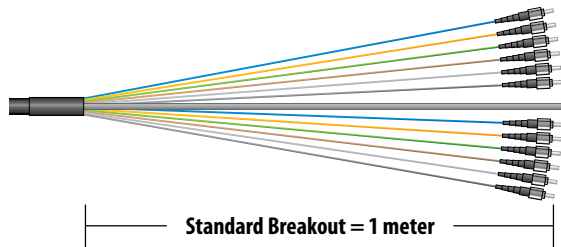

LOOSE TUBE CABLE ASSEMBLY



ASSEMBLY CONFIGURATOR: NEED TO YOUR EXACT SPECIFICATIONS.

MODE	LENGTH (IN METERS)	CABLE RATING	FIBER COUNT (Multi Fiber Only)	BREAKOUT BUILD-UP (Multi Fiber Only)	SPOOLING OPTIONS	PULLING EYE INSTALLED
S	X	RI	04	Z3	HC	PE
S= Singlemode M= Multimode H= Hybrid P= Polarization Maintaining Fiber (Slow Axis) F= Polarization Maintaining Fiber (Fast Axis)		NP= No Preference RI= OFNR (Riser) PL= OFNP (Plenum) LZ= LSZH (Low Smoke) UV= Polyethylene/Outdoor	02=2Fiber 04=4 Fiber 06=6 Fiber 12=12 Fiber 24=24 Fiber 48=48 Fiber 72=72 Fiber 96=96 Fiber 144=144 Fiber *Specify Fiber Count not listed	Z9=900µm Z6=1.6mm Z1=1.8mm Z2=2.0mm Z3=3.0mm	HC=Hand Coil SP= Spool	PE= Outside End Only PBE= Both Ends

All Duplex Clipped custom assemblies are A to B polarity. A to A polarity is available upon request!

Part # Example:

S-3-7A-8U-S-3-RI-HC-PE

Translates to: Simplex 9/125 FC/APC - ST/UPC singlemode, 3meter, riser rated patch cable, hand coiled, with pulling eye

ELIMENT™ MDC USCONEC™ NEW HIGH DENSITY, 2 FIBER CONNECTORS

US Conec's ELIMENT™ MDC connector is a Very Small Form Factor (VSFF) duplex optical connector designed for termination of Multi-mode and Single-mode fiber cables up to 2.0mm in diameter. The MDC connector is manufactured with proven 1.25mm ferrule technology used in industry standard LC optical connectors, meeting IEC 61753-1 Grade B insertion loss requirements. Contains (2) 1.25 mm ceramic ferrules (ferrules same as LC).

PART #	DESCRIPTION	PRICE
22082	9/125 SM UPC MDC 2 fiber connector, Blue, requires 1.6-2.0mm Round Cable	\$4.80
22083	9/125 SM APC MDC 2 fiber connector, Green, requires 1.6-2.0mm Round Cable	6.50
22084	OM3 50/125 MDC 2 fiber connector, Aqua, requires 1.6-2.0mm Round Cable	5.55
22236	OM4 50/125 MDC 2 fiber connector, Magenta, requires 1.6-2.0mm Round Cable	5.55
22237	OM5 50/125 MDC 2 fiber connector, Lime Green, requires 1.6-2.0mm Round Cable	4.80
21866	USConec 2 port SM MDC/MDC adapter, Blue. 4 dust plugs	7.25
21867	USConec 2 port SM APC MDC/MDC adapter, Green. 4 dust plugs	7.25
21868	USConec 2 port MM OM3 MDC/MDC adapter, Aqua. 4 dust plugs	7.25
21870	USConec 2 port MM OM4 MDC/MDC adapter, Magenta. 4 dust plugs	7.25
21869	USConec 2 port MM OM5 MDC/MDC adapter, Lime Green. 4 dust plugs	7.25
22524	USConec 2 port SM MDC/MDC adapter, Blue. 4 dust plugs	6.50
22525	USConec 2 port SM APC MDC/MDC adapter, Green.	6.50
22526	USConec 2 port MM OM3 MDC/MDC adapter, Aqua.	6.50
22527	USConec 2 port MM OM4 MDC/MDC adapter, Magenta.	6.50
22528	USConec 2 port MM OM5 MDC/MDC adapter, Lime Green.	6.50

USCONEC



22082

FEATURES

- Two 1.25mm ferrules in one connector housing
- Push-pull boot for connector insertion and extraction
- Simple polarity reversal with no exposed fibers
- Meets IEC 61753-1 Grade B insertion loss requirements
- Telcordia GR-326 and TIA-568 compliant
- Designed for cables up to 2.0mm OD
- MM, SM and SM APC available
- 3x fiber cabling density over LC

MPO/MTP PRE-TERMINATED SYSTEMS

The FIS MPO/MTP Module is a pre-terminated, pre-tested, rack mount module system allowing for a simple installation of MPO/MTP backbone cables with a transition to standard LC or SC connections. The FIS modules are designed to fit into enclosures with LGX slot configurations. Using a pre-terminated cable assembly in conjunction with modules within a rack allows for easier installation and simpler cable management. Contact your FIS sales representative today for further details or use the configurators below to construct the proper combination to meet any requirement. All stock cassettes are built using elite ferrules.

BUILD YOUR OWN CUSTOM MPO/MTP MODULE / CASSETTE

Use this chart to build a MPO/MTP module to your exact specifications.

MODULE STYLE	MPO/MTP GENDER	FRONT CONNECTOR	FIBER TYPE	FIBER COUNT	MTP CASSETTE POLARITY
F1-MTP	M	LU	OS2	12	A
F1-MTP = MPO/MTP Cassette, LGX, Black	M = Male F = Female	Y = SC/PC YU = SC/UPC YA = SC/APC L = LC/PC LU = LC/UPC LA = LC/APC	OM1 = 62.5µm OM1, MM OM2 = 50µm OM2, MM OM3 = 50µm OM3, MM OM4 = 50µm OM4, MM OM5 = 50µm OM5, MM OS2 = 9µm OS2, SM	8 = 8 Fiber 12 = 12 Fiber 16 = 16 Fiber 24 = 24 Fiber 32 = 32 Fiber	A = Type A (Default) AF = Type A Flipped B = Type B C = Type C D = 24 Fiber Type A E = 24 Fiber Type B U = Other (User Defined)



Call Your Sales Representative for Additional Configurations

CUSTOM MPO/MTP TRUNK CABLE ASSEMBLY CONFIGURATOR:

Use this chart to build your MPO/MTP custom cable assembly

CABLE STYLE	FIBER	CONNECTOR SIDE A (MTP STYLE ONLY) / SIDE B	MODE	LENGTH (IN METERS)	MPO/MTP FERRULE QUALITY	CABLE FIBER COUNT	POLARITY	BUILD UP BREAKOUT	JACKET	P/E
M	8	MF12 LU	M	1	S	12	A	X	PL	X
MD = Micro Distribution HD = High Density Micro Distribution R = Ribbon	1 = 50µm MM - OM2 2 = 62.5µm MM - OM1 3 = 9µm SM - OS2 8 = 50µm 10Gig-OM3 * 9 = 9µm SM - ULTRA * 10 = 50µm 10Gig - OM4 * 12 = 50µm 10Gig - OM5	YU = SC/UPC YA = SC/APC LU = LC/UPC LA = LC/APC 8U = ST/UPC 7U = FC/UPC 7A = FC/APC MT8 = MTP 8 Ferrule Male MT12 = MTP 12 Ferrule Male MT16 = MTP 16 Ferrule Male MT24 = MTP 24 Ferrule Male MT32 = MTP 32 Ferrule Male MF48 = MTP 48 Ferrule Male MF72 = MTP 72 Ferrule Male MF8 = MTP 8 Ferrule Female MF12 = MTP 12 Ferrule Female MF16 = MTP 16 Ferrule Female MF24 = MTP 24 Ferrule Female MF32 = MTP 32 Ferrule Female MF48 = MTP 48 Ferrule Female MF72 = MTP 72 Ferrule Female MC16M = MMC 16 Ferrule Male MC24M = MMC 24 Ferrule Male MC16F = MMC 16 Ferrule Female MC24F = MMC 24 Ferrule Female	S = Singlemode M = Multimode		S = Standard * E = Elite * P = MTP Pro * F = Fast-Track MTP®	12 = 12-fiber 24 = 24 fiber 32 = 32 fiber 36 = 36 fiber 48 = 48 fiber 72 = 72 fiber 144 = 144 fiber	A = Type A B = Type B C = Type C D = 24 Fiber Type A E = 24 Fiber Type B U = Other (User Defined)	Z9 = 900 Z2 = 2mm Z3 = 3mm X = None	R = Riser PL = Plenum	PE = Pulling Eye PBE = Pulling Eyes Both Ends


* Bend Insensitive

STANDARD FERRULES VS. ELITE FERRULES SPECIFICATIONS

	STANDARD FERRULES		ELITE FERRULES	
	Standard Singlemode MT Ferrule	Standard Multimode MT Ferrule	MM MT Elite® Multimode MT Ferrule	SM MT Elite® Singlemode MT Ferrule
Insertion Loss	0.25dB Typical (All Fibers) 0.75dB Maximum (Single Fiber) ¹	0.20dB Typical (All Fibers) 0.60dB Maximum (Single Fiber) ^{2,3}	0.1dB Typical (All Fibers) 0.35dB Maximum (Single Fiber) ^{2,3}	0.10dB Typical (All Fibers) 0.35dB Maximum (Single Fiber) ¹
Optical Return Loss	>60dB (8° Angle Polish)	>20dB	>20dB	>60dB (8° Angle Polish)


* Note: Choose two connector styles from the chart above one for Connector Side A and one for Connector Side B. Side A must be of a MTP style connector only.

24 FIBER MPO/MTP STRAIGHT POLARITY

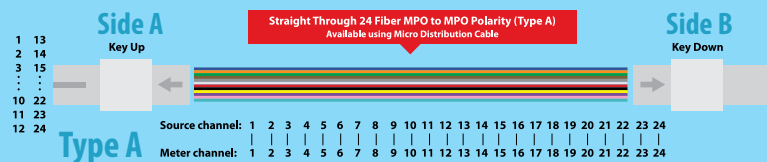

Side A Channels	Key	Side B Channels
1. Blue, 2. Orange, 3. Green, 4. Brown, 5. Slate, 6. White, 7. Red, 8. Black, 9. Yellow, 10. Violet, 11. Rose, 12. Aqua, 13. Blue, 14. Orange, 15. Green, 16. Brown, 17. Slate, 18. White, 19. Red, 20. Black, 21. Yellow, 22. Violet, 23. Rose, 24. Aqua		1. Blue, 2. Orange, 3. Green, 4. Brown, 5. Slate, 6. White, 7. Red, 8. Black, 9. Yellow, 10. Violet, 11. Rose, 12. Aqua, 13. Blue, 14. Orange, 15. Green, 16. Brown, 17. Slate, 18. White, 19. Red, 20. Black, 21. Yellow, 22. Violet, 23. Rose, 24. Aqua

24 FIBER MPO/MTP TYPE-B REVERSED POLARITY

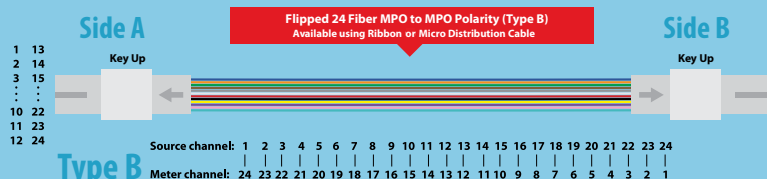


Side A Channels	Key	Side B Channels
1. Blue, 2. Orange, 3. Green, 4. Brown, 5. Slate, 6. White, 7. Red, 8. Black, 9. Yellow, 10. Violet, 11. Rose, 12. Aqua, 13. Blue, 14. Orange, 15. Green, 16. Brown, 17. Slate, 18. White, 19. Red, 20. Black, 21. Yellow, 22. Violet, 23. Rose, 24. Aqua		1. Blue, 2. Orange, 3. Green, 4. Brown, 5. Slate, 6. White, 7. Red, 8. Black, 9. Yellow, 10. Violet, 11. Rose, 12. Aqua, 13. Blue, 14. Orange, 15. Green, 16. Brown, 17. Slate, 18. White, 19. Red, 20. Black, 21. Yellow, 22. Violet, 23. Rose, 24. Aqua

CUSTOM 12 FIBER MPO/MTP TO MPO/MTP TRUNK CABLE DIAGRAMS

Use these diagrams to help build the cable you need to your exact specifications.

Type A

Straight Through 12 Fiber MPO to MPO Polarity (Type A)
Available using Ribbon or Micro Distribution Cable

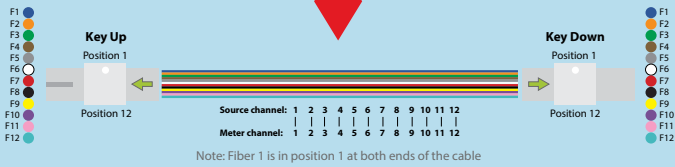


MD9MF12MF12SxxE12AXPL – Quantity 1 **Trunk Cable** (MPO/MTP Plenum Trunk cable Method A using Micro-Distribution Singlemode, 12 Fiber cable with MTP/Female Elite – MTP/Female Elite connectors, "xx" = length)

F1MTP120S2MT12ELUA - Quantity 2 **Cassettes** (one cassette for Side A and one for Side B 12 Fiber Type A Singlemode Cassette with 1 rear MPO/MTP -male elite port, 6 front LC duplex ports)

X9CCSxxPLHC – Quantity 6 **Patch Cables** (Duplex A - B Plenum 1.6mm Singlemode Patch cord LC Duplex – LC Duplex, "xx" = length of hand coiled)

X9CCSxxPLHC – Quantity 6 **Patch Cables** (Duplex A – A* Plenum 1.6mm Singlemode patch cord LC Duplex – LC Duplex plenum "xx" = length hand coiled) *Must specify A – A polarity

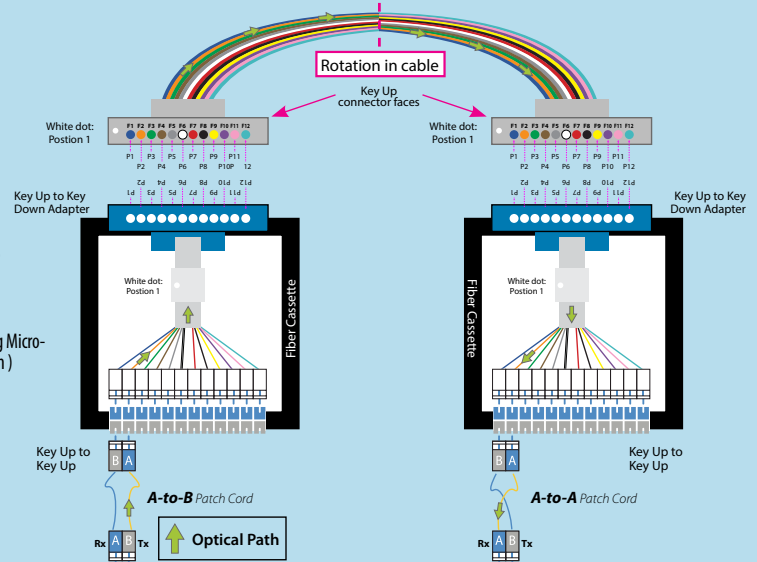

12 FIBER TYPE A MPO/MTP POLARITY

Type B


Reversed 12 Fiber MPO to MPO Polarity (Type B)
Available using Ribbon or Micro Distribution Cable



MD8MF12MF12MxxE12BXPL – Quantity 1 **Trunk Cable** (MPO/MTP Plenum Trunk cable Method B using Micro-Distribution Multimode OM3, 12 Fiber cable with MTP/Female Elite – MTP/Female Elite connectors, "xx" = length)

F1MTP120M3MT12ELUB - Quantity 2 **Cassettes** (one cassette for Side A and one for Side B 12 Fiber Type B Multimode OM3 Cassette with 1 rear MPO/MTP -male elite port, 6 front LC duplex ports)


X8CCMxxPLHC – Quantity 12 **Patch Cables** (Duplex A - B Plenum 1.6mm Multimode OM3 Patch cord LC Duplex – LC Duplex, "xx" = length of hand coiled)

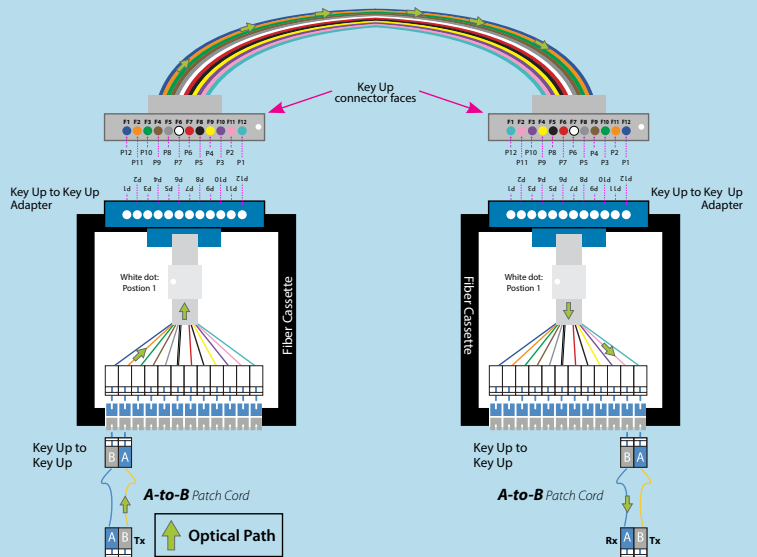

12 FIBER TYPE B MPO/MTP POLARITY

Type C


Flipped Pairs 12 Fiber MPO to MPO Polarity (Type C)
Available using Micro Distribution Cable

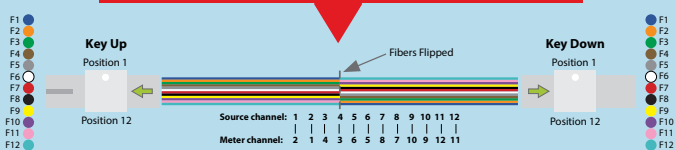

MD8MF12MF12MxxE12CXPL – Quantity 1 **Trunk Cable** (MPO/MTP Plenum Trunk cable Method C using Micro-Distribution Multimode OM3, 12 Fiber cable with MTP/Female Elite – MTP/Female Elite connectors, "xx" = length)

F1MTP120M3MT12ELUC - Quantity 2 **Cassettes** (one cassette for Side A and one for Side B 12 Fiber Type C Multimode OM3 Cassette with 1 rear MPO/MTP -male elite port, 6 front LC duplex ports)


X8CCMxxPLHC – Quantity 12 **Patch Cables** (Duplex A - B Plenum 1.6mm Multimode OM3 Patch cord LC Duplex – LC Duplex, "xx" = length of hand coiled)

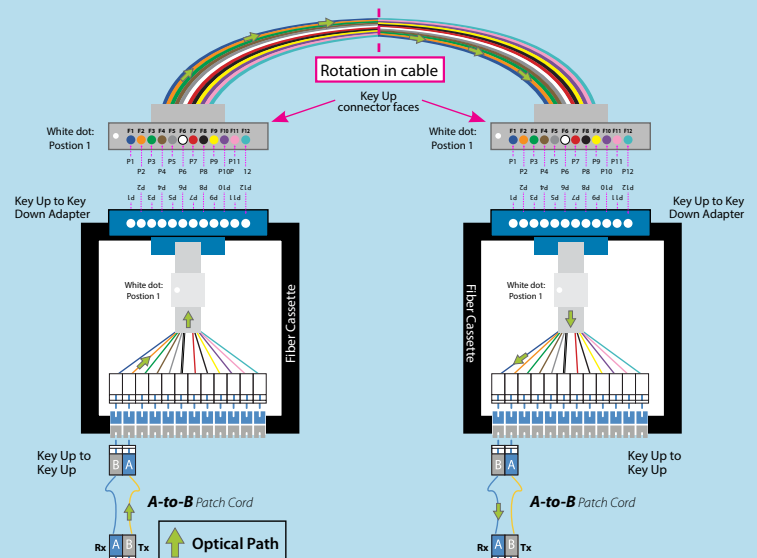

12 FIBER TYPE C MPO/MTP POLARITY



S-4-9U-9U-S-1-FIS



E2000/APC

E2000/UPC



F1-MCP-1-2-LC-ST




NC-3-BA-P-S-15-FIS-6



F1-2071



F1-3071

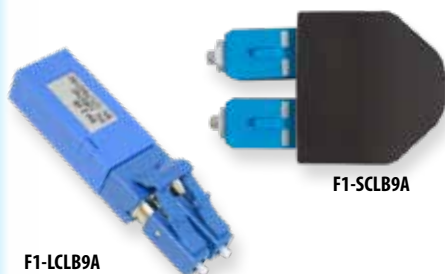

F1-SCLB9A

F1-LCLB9A

POLARIZATION MAINTAINING PATCH CABLE

For polarization-sensitive applications, FIS offers PM patch cables with UPC or APC connector finishes. Available in 900µm and 3mm jacketed versions. Important specifications need to be discussed with FIS Sales Associate upon ordering, such as: Alignment (slow or fast axis) Fiber Specifications, Cable Jacket (900µm buffer or 3.0mm), whether or not the purchased PM assemblies will be used for splicing. Contact FIS for additional specifications and pricing on PM jumpers of various lengths. **Specify Fibercore Limited PM fiber or Corning PM Fiber.**

PART #	DESCRIPTION	PRICE
S-4-9A-9A-S-1-FIS	Simplex FC/APC - FC/APC, Slow Axis, 3.0mm Jacketed, Blue, 1 Meter	\$95.00
S-4-9U-9U-S-1-FIS	Simplex FC/UPC - FC/UPC, Slow Axis, 3.0mm Jacketed, Blue, 1 Meter	95.00
S-4-9U-9A-S-1-FIS	Simplex FC/UPC - FC/APC, Slow Axis, 3.0mm Jacketed, Blue, 1 Meter	95.00

E2000 PATCH CABLE AND MATING SLEEVES

FIS offers Singlemode E2000 2.8mm cable assemblies. The E2000 comes with an integrated shutter system to protect the user from high-power laser emissions, and protects the connector from contamination.

Call for other configurations and lengths.

PART #	MFG	DESCRIPTION	PRICE
S-3-EU-EU-S-1-FISC	FIS	Simplex 9/125 E2000/UPC to E2000/UPC 1 Meter	\$26.95
S-3-EU-EU-S-3-FISC	FIS	Simplex 9/125 E2000/UPC to E2000/UPC 3 Meter	27.65
S-3-EU-EU-S-5-FISC	FIS	Simplex 9/125 E2000/UPC to E2000/UPC 5 Meter	28.35
S-3-EA-EA-S-1-FISC	FIS	Simplex 9/125 E2000/APC to E2000/APC 1 Meter	27.95
S-3-EA-EA-S-3-FISCU	FIS	Simplex 9/125 E2000/APC to E2000/APC 3 Meter	28.65
F1-E2000	FIS	E2000 to E2000 Singlemode Adapter Ceramic Sleeve	12.00
F1-E2000APC	FIS	E2000/APC to E2000/APC Singlemode Adapter Ceramic Sleeve	15.00

MODE CONDITIONING PATCH CABLE

Mode Conditioning Patch Cable is used in conjunction with laser transmitters or VCSEL's for 1 Gb transmissions over FDDI fiber in fiber optic links to improve the transition bandwidth by the reduction of modal dispersion. These cords can be assembled in various configurations to meet your specific needs. Contact your FIS sales representative for pricing and delivery. Improve the performance of your network today.

LC-SC MCP MULTIMODE 62.5/125µm

PART #	LENGTH	PRICE
F1-MCP-1-2-LC-SC	1 Meter	\$68.00
F1-MCP-3-2-LC-SC	3 Meters	70.00
F1-MCP-5-2-LC-SC	5 Meters	73.00
F1-MCP-10-2-LC-SC	10 Meters	78.00

LC-ST MCP MULTIMODE 62.5/125µm

PART #	LENGTH	PRICE
F1-MCP-1-2-LC-ST	1 Meter	\$68.00
F1-MCP-3-2-LC-ST	3 Meters	70.00
F1-MCP-5-2-LC-ST	5 Meters	73.00
F1-MCP-10-2-LC-ST	10 Meters	78.00

FIS COMPACT NODE CABLES (SERVICE CABLES)

Fiber Instrument Sales' Compact Node is an epoxy based optical node cable assembly. Designed for HFC applications and with the flexibility to fit aerial, pedestal and vault applications. Available in various custom configurations up to 12 fibers.

PART #	DESCRIPTION	PRICE
NC-3-BA-P-S-15-FIS-2	Node Cable 2 Fiber Loosetube Cable SM SC/APC - Pigtail, 15 Meters	\$125.00
NC-3-BA-P-S-15-FIS-4	Node Cable 4 Fiber Loosetube Cable SM SC/APC - Pigtail, 15 Meters	156.00
NC-3-BA-P-S-15-FIS-6	Node Cable 6 Fiber Loosetube Cable SM SC/APC - Pigtail, 15 Meters	190.00
NC-3-BU-P-S-15-FIS-2	Node Cable 2 Fiber Loosetube Cable SM SC/UPC - Pigtail, 15 Meters	119.00
NC-3-BU-P-S-15-FIS-4	Node Cable 4 Fiber Loosetube Cable SM SC/UPC - Pigtail, 15 Meters	150.00
NC-3-BU-P-S-15-FIS-6	Node Cable 6 Fiber Loosetube Cable SM SC/UPC - Pigtail, 15 Meters	184.00

FIS FIBER OPTIC TERMINATOR CONNECTORS

Low Reflection Terminators are designed for use in unused ports and to reduce back reflection into fiber optic systems. Each connector is environmentally sealed for protection. Back Reflection APC = -65dB UPC = -55dB

PART #	DESCRIPTION	PRICE
F1-0071	FIS ST/UPC Terminator Connector	\$6.95
F1-2071	FIS FC/UPC Terminator Connector	6.95
F1-3071	FIS SC/UPC Terminator Connector	6.95
F1-2072	FIS FC/APC Terminator Connector	7.95
F1-3072	FIS SC/APC Terminator Connector	7.95
F1-4071	FIS LC/UPC Terminator Connector	6.95
F1-4072	FIS LC/APC Terminator Connector	7.95



FIS LOOPBACK MODULES

Loopbacks are designed for testing, engineering and the burn-in stage of boards or other equipment. They provide system test engineers a simple but effective way of testing the transmission capability and receiver sensitivity of network equipment.

PART #	DESCRIPTION	PRICE
F1-SCLB9A	SC Loopback SM 9/125µm Fiber	\$14.50
F1-LCLB9A	LC Loopback SM 9/125µm Fiber	14.50
F1-LCLB62A	LC Loopback MM 62.5/125µm Fiber	14.50
F1-LCLB50A	LC Loopback MM 50/125µm Fiber	14.50

WAVELENGTH DIVISION MULTIPLEXERS

Wavelength Division Multiplexing is a technology utilized in fiber optics that allows multiple laser sources to broadcast through a single fiber. A WDM enables a single fiber to broadcast Bi-Directionally and increase bandwidth by a factor of the number of light sources utilized. There are sub categories of WDM that refer to the number of allowable lasers (channels) used, each source is spaced equally by a defined separation of wavelength.

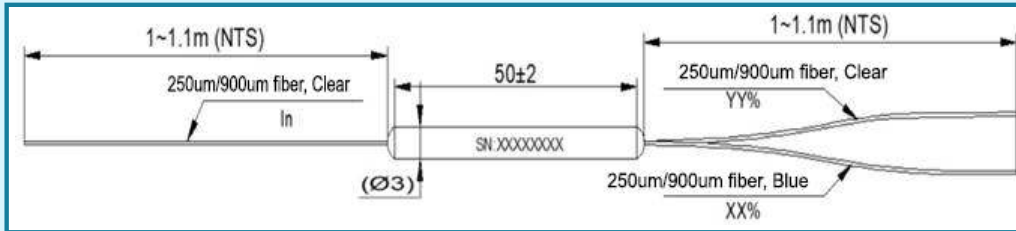

**Dual Window
Coupler/Splitter**

SINGLEMODE DUAL WINDOW COUPLERS/SPLITTERS

PART #	DESCRIPTION	PRICE
250µm		
Z1SDW13550122UC	1x2 (1310/1550nm) 50/50 Ratio	\$24.95
Z1SDW13510122UC	1x2 (1310/1550nm) 10/90 Ratio	24.95
Z1SDW13520122UC	1x2 (1310/1550nm) 20/80 Ratio	24.95
Z1SDW13530122UC	1x2 (1310/1550nm) 30/70 Ratio	24.95
Z1SDW13540122UC	1x2 (1310/1550nm) 40/60 Ratio	24.95
Z1SDW13550222UC	2x2 (1310/1550nm) 50/50 Ratio	24.95
900µm		
Z1SDW13550129UC	1x2 (1310/1550nm) 50/50 Ratio	\$24.95
Z1SDW13510129UC	1x2 (1310/1550nm) 10/90 Ratio	24.95
Z1SDW13520129UC	1x2 (1310/1550nm) 20/80 Ratio	24.95
Z1SDW13530129UC	1x2 (1310/1550nm) 30/70 Ratio	24.95
Z1SDW13540129UC	1x2 (1310/1550nm) 40/60 Ratio	24.95
Z1SDW13550229UC	2x2 (1310/1550nm) 50/50 Ratio	24.95

MULTIMODE COUPLERS/SPLITTERS (800-1600nm)

PART #	DESCRIPTION	PRICE
250µm		
Z1MMC28550122C	1x2 62.5/125µm Coupler 50/50 Ratio 250µm Fiber	\$63.95
Z1MMC38550122C	1x2 50/125µm Coupler 50/50 Ratio 250µm Fiber	63.95
900µm		
Z1MMC28550129C	1x2 62.5/125µm Coupler 50/50 Ratio 900µm Fiber	\$63.95
Z1MMC38550129C	1x2 50/125µm Coupler 50/50 Ratio 900µm Fiber	63.95

WAVELENGTH DIVISION MULTIPLEXERS

A Wave Division Multiplexer (WDM) is a coupler that enables you to channel a signal to multiple devices operating at different wavelengths.

PART #	DESCRIPTION	PRICE
250µm		
Z1WDM13550122UC	1x2 5m Dual Window (1310/1550nm) WDM 250µm Fiber	\$19.95
900µm		
Z1WDM13500129UC	1x2 5m Dual Window (1310/1550nm) WDM 900µm Fiber	\$21.95

INQUIRE FOR PRICING ON CIRCULATORS OR ISOLATORS

RUGGEDIZED 2mm/3mm JACKETED COUPLERS/SPLITTERS

Install these ruggedized splitters into outdoor or indoor enclosures. The 2mm or 3mm furcated fiber legs offer extra protection when technicians are working in compact areas. The splitter/couplers are housed in a small plastic case; furcated fiber legs are attached with or without connectors installed. *Custom size jacketing/split ratios/connector styles available.*

PART #	DESCRIPTION	PRICE
RSC-3-S-2-50-YA-YA-2	Ruggedized Splitter, SM, 1 x 2, 50/50 split, SC/APC-SC/APC, 2mm jacketing	\$76.95
RSC-3-S-2-45-YA-YA-2	Ruggedized Splitter, SM, 1 x 2, 55/45 split, SC/APC-SC/APC, 2mm jacketing	76.95
RSC-3-S-2-40-YA-YA-2	Ruggedized Splitter, SM, 1 x 2, 60/40 split, SC/APC-SC/APC, 2mm jacketing	76.95
RSC-3-S-2-30-YA-YA-2	Ruggedized Splitter, SM, 1 x 2, 70/30 split, SC/APC-SC/APC, 2mm jacketing	76.95
RSC-3-S-2-05-YA-YA-2	Ruggedized Splitter, SM, 1 x 2, 90/5 split, SC/APC-SC/APC, 2mm jacketing	76.95
RSC-1-S-2-50-Y-Y-3	Ruggedized Splitter, 50µm, 1 x 2, 50/50 split, SC/PC-SC/PC, 3mm jacketing	80.00
RSC-1-S-2-40-Y-Y-3	Ruggedized Splitter, 50µm, 1 x 2, 60/40 split, SC/PC-SC/PC, 3mm jacketing	80.00



RSC-1-S-2-50-Y-Y-3

PACKAGED NETWORK COUPLER AND TREE COUPLER

Housed and connectorized with your specified connector are 1X2 or 1X4 Multimode or Singlemode splitters. Also available in same packaging is Singlemode 1310/1550nm Wave Division Multiplexer (WDM). Specify core/clad size, connector style, and split ratio. (Highest port count available is 1X4.) *Other Configurations Available - Call FIS Representative.*

PART #	DESCRIPTION	PRICE
PNC-3-S-2-50-YU-YU	Packaged Network Coupler Box, Singlemode, 50/50 split, 1x2 SC/UPC Adapters	\$135.00
PNC-3-S-2-10-YU-YU	Packaged Network Coupler Box, Singlemode, 90/10 split, 1x2, SC/UPC Adapters	135.00
PNC-3-S-4-EV-YU-YU	Packaged Network Coupler Box, Singlemode, Even split, 1x4, SC/UPC Adapters	239.00



PNC-3-S-4-50-7U-7U



FIS Blue provides specialized assemblies to the Military and Broadcast Industries. Count on them for custom broadcast or military grade tactical fiber optic cable assemblies with up to 24 fibers, in cables that are crush-resistant, resilient and with a thick layer of aramid strength members. The Kevlar within the cable is strong enough to withstand the weight of a truck, making these assemblies ideal for temporary field production, sporting events, and military operations. Call us today for more information and detailed specifications. Our cable assemblies can be terminated with a variety of specialized connectors such as Expanded Beam, TFOCA II® or SMPTE Connectors. These specialized connectors can also be paired with standard connectors (SC, LC, FC, ST, etc.).



FIBERFOX 2CH Cable Connector




FIBERFOX 4CH Cable Connector




ADVANCED DUO



ADVANCED QUAD

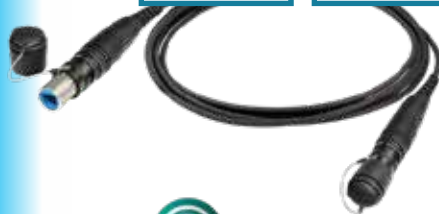

ADVANCED MTP®

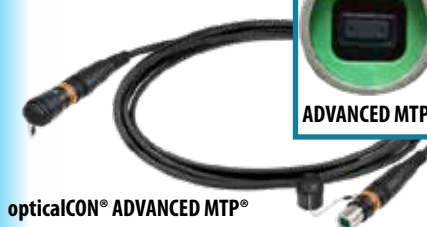

opticalCON® ADVANCED MTP®

FIBERFOX 2CH & 4CH CABLE CONNECTORS

The FIBERFOX 2CH & 4CH Cable connectors are expanded beam multimode hermaphroditic connectors suited for a vast array of applications, including Lighting, Network, PA, Video, Broadcast, Defense & Government, Railway and Petrochemical. The innovative design ensures its suitability for deployment in the toughest environments where constant performance and total reliability are critical. The connector is designed according to the MIL-DTL-83526 standard and fits to all other connectors with this standard.

- Heavy-duty, connectors IP68 (even unprotected)
- No special cleaning or measurement tools required
- Ø = 5mm, PUR flame-retardant, halogen-free, bend tolerant
- Cables can be mated together directly, no couplers required
- Ready-made up with connectors EBC1502
- Wear-free connectors, > 10,000 mating cycles without any maintenance

PART #	DESCRIPTION	PRICE
T-10-PF-PF-M-100-FISB-2	FIBERFOX Multimode 2-channel 100 Feet OM3 No Reel	\$1,164.44
T-10-PF-PF-M-100-FISB-2-RL	FIBERFOX Multimode 2-channel 100 Feet OM3 GT-310 Reel	1,442.22
T-10-PF-PF-M-100-FISB-4	FIBERFOX Multimode 4-channel 100 Feet OM3 No Reel	1,417.78
T-10-PF-PF-M-100-FISB-4-RL	FIBERFOX Multimode 4-channel 100 Feet OM3 GT-310 Reel	1,695.56

*Different cable lengths available upon request.

opticalCON® ADVANCED DUO AND QUAD

The opticalCON system is based on LC-Duplex connectors but eliminates its weakness and guarantees a safe, dust-protected and rugged connection. Being compatible to conventional LC connectors the opticalCON DUO offers the choice of using cost-effective LC cables or the rugged opticalCON cable assembly for mobile applications. The opticalCON DUO is the ideal solution for equipment connections and system integration offering LC compatibility on chassis connector front and rear.

The opticalCON QUAD is based on the proven opticalCON DUO connection system but with four channels it is optimized for Point-to-Point interconnections and multi-channel routing applications. The system copes with the increasing need for fiber optic channels.

opticalCON® ADVANCED DUO FEATURES

- Ruggedized and dirt protected fiber optic connection system
- 2-pole military approved robust and light weight mobile field cable with multi- or single mode fibers
- Accommodates standard optical LC-Duplex connectors
- Excellent dust and dirt protection due to automatic sealing shutter with silicone gasket
- Easy to clean, no special tools required
- Waterproof acc. to IP65 safety standard in mated condition
- opticalCON multimode fiber cables offer laser and bend optimized OM3 fibers
- Cable connector features rugged all metal housing and heavy duty cable retention
- Reliable Push-Pull locking mechanism
- Available in different packaging versions

opticalCON® ADVANCED QUAD FEATURES

- Ruggedized and dirt protected fiber optic connection system
- For Point-to-Point multichannel routing
- Dust and water resistant according to IP65 in mated condition
- opticalCON multimode fiber cables offer laser and bend optimized OM3 fibers
- Innovative spherical shutter guarantees low maintenance

PART #	DESCRIPTION	PRICE
T-3-OD-OD-S-100-FISB-2	opticalCON® Duo Singlemode 2-channel 100 Feet No Reel	\$799.57
T-3-OD-OD-S-100-FISB-2-RL	opticalCON® Duo Singlemode 2-channel 100 Feet GT-310 Reel	970.00
T-3-OQ-OQ-S-100-FISB-4	opticalCON® Quad Singlemode 4-channel 100 Feet No Reel	897.00
T-3-OQ-OQ-S-100-FISB-4-RL	opticalCON® Quad Singlemode 4-channel 100 Feet GT-310 Reel	1,082.00

*Different cable lengths available upon request.

opticalCON® ADVANCED MTP®

The opticalCON MTP® cable connectors are characterized by the robust all-metal housing and the heavy-duty strain relief. The innovative spherical dust shutter protects the fiber from contamination and minimizes maintenance. The color-coded cable connectors are pre-assembled and available in a variety of mobile field cables.

- Rugged 12-channel fiber optic connection system
- Innovative spherical shutter guarantees low maintenance
- For Point-to-Point multichannel routing
- Dust and water resistant according to IP65 in mated condition

PART #	DESCRIPTION	PRICE
LT-3-OM-OM-S-100-FISB-12	opticalCON® MTP Singlemode 12-channel 100 Feet No Reel	\$1,921.00
LT-3-OM-OM-S-100-FISB-24	opticalCON® MTP Singlemode 24-channel 100 Feet No Reel	2,283.00

*Different cable lengths available upon request.

SMPTE 311M CABLE ASSEMBLIES

These rugged stainless steel SMPTE connectors ensure a very long product life. Cable assemblies utilize two Singlemode fiber contacts, two power contacts and two signal contacts. Cable assemblies are available with multiple configurations including panel mount receptacles and plugs.

- Quick Push-Pull Self Latching System
- Stainless Steel for Harsh Environments
- Complies with SMPTE Signal Requirements
- Popular HDTV Connection on Cameras and Panels

PART #	DESCRIPTION	PRICE
BC-3-FUW-PUW-S-100-FISB-2	LEMO SMPTE Assembly PUW (receptacle) to FUW (plug) 100 feet	\$1,045.00

*Different cable lengths available upon request.

**Please Call For
Additional Pricing.**



SMPTE 311M Cable Assembly



Visit FIS Blue Online for Our Full Product Line Offering FOR ALL YOUR MILITARY & BROADCAST FIBER OPTIC NEEDS!

BFOCA-II CONNECTOR

A ruggedized fiber optic connector engineered to be fully compatible with the TFOCA-II, offering the same reliable form, fit, and function for demanding environments. Meets MIL-DTL-83526/16 & 17 standards. Currently in 4-channel Plug styles, with Flange Mount and Panel Mount Connectors coming soon!

PART #	DESCRIPTION	PRICE
T-3-BF-BF-S-100-FISB-4	BFOCA Plug to BFOCA Plug Singlemode 4-channel, 100 feet	Call For Pricing



BFOCA-II Connector



TFOCA-II CABLE ASSEMBLIES

Amphenol Fiber Systems International TFOCA II® connectors are designed to withstand repeated handling and mating cycles typically required for rapid fiber optic cable deployment and retrieval in a tactical environment. TFOCA II is the replacement for US Army and US Marine Corps legacy systems with TFOCA (AT&T).

PART #	DESCRIPTION	PRICE
T-3-T2P-T2P-S-100-FISB-4	TFOCA-II Plug to Plug Singlemode 4-channel 100 feet	Call For Pricing
T-3-T2P-T2P-S-100-FISB-12	TFOCA-II Plug to Plug Singlemode 12-channel 100 feet	Call For Pricing

*Different cable lengths available upon request.

**FIS Blue
TFOCA-II
Cable Assembly
Reel Shown**



DELPHI 4 AND 12 CHANNEL HERMAPHRODITIC CABLE ASSEMBLIES

Delphi's 4 and 12 Channel Hermaphroditic Connectors are both Single and Multimode compatible in the same connector. They are designed to withstand crush, impact, cable twist, bending movement, water and mud immersion, as well as many other harsh environments. They will link to identical connectors without regard to connector gender.

PART #	DESCRIPTION	PRICE
T-3-DP-DP-S-1-FISB-4	Delphi 4-channel Plug to Plug Singlemode 1 Foot Length	\$854.80
T-3-DP-DP-S-1-FISB-12	Delphi 12-channel Plug to Plug Singlemode 1 Foot Length	2,920.85

*Different cable lengths available upon request.



DELPHI Hermaphroditic Cable Assembly

FISCHER 4 CHANNEL RUGGED CABLE ASSEMBLIES

Fischer Fiber Optic push-pull connector solutions are purpose built to withstand the elements of rugged and harsh environments, providing virtually faultless performance. Extreme Environmental Robustness: IP68 ingress protection when mated or with caps and IP67 sealing even unmated. Connectors and assemblies are available in 2 and 4 channels, Singlemode and Multimode.

PART #	DESCRIPTION	PRICE
T-3-FP-FP-S-100-FISB-4	Fischer 4-channel Plug to Plug Singlemode 100 Feet	Call For Pricing
T-3-FB-8U-S-2-FISB-4	Fischer 4-channel Jam-Nut Receptacle to ST Singlemode 2 Feet	Call For Pricing

**FISCHER Rugged
Cable Assembly**



M28876 CABLE ASSEMBLIES, 4 TO 31-CHANNEL

For rugged fiber optic military applications that require higher fiber counts, the M28876 is a good solution. The M28876 connectors come in a variety of fiber counts from 4 to 31 and vary in shell size from 13 - 23. There are a diverse amount of connector styles. These are offered in plug, jam-nut receptacle and flange mount receptacle. In addition, each of these have different options for the strain relief/backshell: none, straight, 90° and 45°.

In addition to connectors, FIS Blue is also a world-wide leader in M28876 cable assembly production. FIS Blue custom builds all types of M28876 and Navy assemblies to meet any need. All cable assemblies are 100% tested and are shipped with documented test results. In addition, full interferometer results are available upon request.



**MQJ
Assemblies
Available**

FIS BLUE TACTICAL FIBER OPTIC CABLE

FIS Blue Broadcast/Tactical Cable consists of a polyurethane outer jacket with your choice of 2, 4, 6, 12 or 24 900µm Hytrel tight buffered fibers surrounded by aramid yarn and an aramid ripcord. Polyurethane jacket makes the cable highly flexible and rugged, so it can also be used in direct burial applications. Tactical fiber optic cables are designed for harsh outdoor environments where maximum performance and reliability is essential.

PART #	FIBER COUNT	DESCRIPTION	PRICE
FB-SMTACCABLE2	2	2-fiber Singlemode Tactical Cable	\$1.75 /Mtr.
FB-SMTACCABLE4	4	4-fiber Singlemode Tactical Cable	1.90 /Mtr.
FB-SMTACCABLE6	6	6-fiber Singlemode Tactical Cable	1.95 /Mtr.
FB-SMTACCABLE12	12	12-fiber Singlemode Tactical Cable	3.05 /Mtr.
FB-SMTACCABLE24	24	24-fiber Singlemode Tactical Cable	6.65 /Mtr.
FB-OM4TACCABLE2	2	2-fiber 50µm OM4 Tactical Cable	\$2.45 /Mtr.
FB-OM4TACCABLE4	4	4-fiber 50µm OM4 Tactical Cable	3.50 /Mtr.
FB-OM4TACCABLE6	6	6-fiber 50µm OM4 Tactical Cable	4.75 /Mtr.
FB-OM4TACCABLE12	12	12-fiber 50µm OM4 Tactical Cable	9.50 /Mtr.
FB-OM4TACCABLE24	24	24-fiber 50µm OM4 Tactical Cable	13.25 /Mtr.
FB-MMTACCABLE4	4	4-fiber 62.5µm OM1 Tactical Cable	\$2.55 /Mtr.
FB-MMTACCABLE12	12	12-fiber 62.5µm OM1 Tactical Cable	6.70 /Mtr.
FB-SMTACCABLE4-BK	4	4-fiber Singlemode Breakout Cable	\$3.41 /Mtr.
FB-MMTACCABLE4-BK	4	4-fiber OM1 Breakout Cable	4.20 /Mtr.
FB-OM4TACCABLE4-BK	4	4-fiber OM4 Breakout Cable	4.40 /Mtr.



Coming Soon in 2025: Armored Tactical Cables by FIS Blue!

FIS Blue is excited to announce the upcoming launch of our Armored Distribution and Breakout-Style Stainless Steel Braided Tactical Cables! Engineered for the most demanding environments, these cables offer unmatched durability and high performance in extreme conditions. Designed to withstand harsh applications, they provide the strength and reliability you need to get the job done.

SHIPBOARD CABLE

Shipboard cable is qualified MIL-PRF-85045 cable. The cable consists of low smoke zero halogen (LSZH) jacketing materials and tight buffered fibers.

PART #	FIBER COUNT	DESCRIPTION	PRICE
M85045/16-02	1	1-fiber Singlemode Shipboard Cable	Call For Pricing
M85045/18-02P	4	4-fiber Singlemode Shipboard Cable	Call For Pricing
M85045/17-02P	8	8-fiber Singlemode Shipboard Cable	Call For Pricing
M85045/16-01	1	1-fiber 62.5µm OM1 Shipboard Cable	Call For Pricing
M85045/18-01P	4	4-fiber 62.5µm OM1 Shipboard Cable	Call For Pricing
M85045/17-01P	8	8-fiber 62.5µm OM1 Shipboard Cable	Call For Pricing

ABS CERTIFIED SHIPBOARD LSZH FIBER CABLE

ABS Certified Shipboard Cable is a flame-retardant, low-smoke and zero-halogen cable intended for single-point termination. Designed for use in Marine and offshore tight-buffered cable installations. It can be used in applications requiring ABS-approved fiber optic cables.

- Zero-halogen construction meets IEC 60754-2
- Meets low-smoke requirements of UL 1685 and IEC 61034-2
- UL listed OFN-ST1
- Round cable construction for easy handling and termination
- Includes ripcord for easy outer jacket removal
- Available with 500µm primary acrylate-coated fiber for maximum mechanical and environmental protection of the optical fiber

PART #	FIBER COUNT	DESCRIPTION	PRICE
S09MS12CZNLBL58	12	12-fiber Singlemode LSZH ABS Certified Shipboard	Call For Pricing
M50MS12C4NLBL58	12	12-fiber Multimode LSZH ABS Certified Shipboard	Call For Pricing

M29504 FIBER OPTIC TERMINI

FIS Blue offers a full line of fiber optic termini In-Stock. The termini are designed for an assorted list of military and harsh environment connectors, including but not limited to: MIL-DTL-38999 Series III, M28876, and Delphi Hermaphroditic Connectors.



Connectors Are Also Available For Purchase. Please Call For Pricing.

Call and Speak With a Sales Representative for Pricing

NUGEN SMPTE TEST SET

FIS Blue's Ruggedized SMPTE Test Set is designed for harsh work conditions where handheld units are not appropriate. The SMPTE Test Set utilizes a remote loopback unit for single ended testing of both optical fibers as well as power for the built-in copper conductor tests. The set checks all 4 copper conductors for continuity and shorts as well as verifying the integrity of the grounding shield in the cable with simple pass/fail audible and visual indicators. The main control unit houses the optical fiber power meter readout, copper conductor test indicators, and the SMPTE fixed plug connector. The Remote Unit contains the SMPTE fixed socket connector.

FEATURES

- Single Test Checks Both Fibers for Loss and all 4 Copper Conductors for Continuity, Short Circuits and Ground Braid Integrity
- Simple Audible and Visual Pass/Fail Indicators for Copper Tests
- Designed for Harsh Environments in Ruggedized Housing
- Rechargeable NiMH Batteries
- Tests 1310nm Wavelength
- Integrated VFL
- New polarity and short testing for copper lines
- Most complete SMPTE Test Set in the industry
- Made In USA

PART #	DESCRIPTION	PRICE
FB-ST501NG	SMPTE Test Set	\$3,395.00

FIS BLUE INC.

SMPTE Ready Testing!



F1-ST501NG

NEW



Coming Soon!

NEW



FB-G-500-6

GT310RM

Coming Soon in 2025: FIS Blue Tactical Grip

FIS Blue is proud to introduce an innovative fan-out kit featuring a clamshell design that securely encases the cable's breakout point. Engineered for seamless and secure pulling operations, this solution enhances durability and efficiency in demanding environments.

BROADCAST AND TACTICAL CABLE REELS

Specially designed steel cable reels to transport or store your broadcast fiber optic cable assemblies. Stack them on your truck or in your warehouse or roll them wherever you like. Please ask about getting your next custom cable assembly on a reel.

PART #	DIMENSIONS	PRICE
FB-G-500-6	FIS Blue Military Olive Drab CARC Reel, holds 500 meters of tactical cable	Call For Pricing
GT310RM	Schill GT-310 Cable Reel With RM Cable Flange Support	\$215.00
GT380RM	Schill GT-380 Cable Reel With RM Cable Flange Support	436.00
HT485RM	Schill HT-485 Cable Reel With RM Cable Flange Support	596.00
OXREEL-SM	Telecast Stackable Small OX Reel, 6" Hub	1,186.00
OXREEL-MD	Telecast Stackable Meidum OX Reel, 6" Hub	820.00



SBA WOSB
Woman Owned Small Business



NIST
800-171
Compliant

Have Something That Needs Fixing?

Let FIS Blue diagnose and repair.

Our repair service is perfect if you want to save time and money. Some tactical cable assemblies cost thousands of dollars, so it's smart to know your options. You can ship your SMPTE or tactical cable assembly to us and we can repair it for a fraction of what it might cost you to replace it.

Our service includes evaluation, repair, and testing to make sure your cable assembly is going to do the job right for you.



TEST EQUIPMENT

TEST EQUIPMENT | OTDRs

FIS: Manufacturer of Fiber Optic Test Equipment

As a fiber optic test equipment manufacturer, we offer OTDRs, Power Meters & Light Sources, VFLs, Microscopes, and more!



FIS ATLAS OTDR CONFIGURED FOR SINGLEMODE OR MULTIMODE

The ATLAS OTDR by FIS is the perfect handheld testing device for a range of fiber optic applications. With a dynamic range of 26dB it can test through a 1x8 splitter for FTTH applications. It has an on-board Visual Fault Locator, Power Meter, Light Source; having the capability of an all-in one optical loss test set (OLTS). The ATLAS OTDR stores files in the commonly used .SOR format and comes with reporting software that will print large batches of OTDR scans into professional, easy to read PDF reports. What's also included is our user friendly graphical mapping software or called "gMAP". This alternative OTDR scan allows even the most inexperienced user to easily interpret the information needed to identify, troubleshoot and verify the important characteristics of a fiber optic cable installation.

FEATURES

- Copper Continuity Tester Module
- Onboard Features: Power Meter, Light Source, VFL, OTDR, Graphical Event Map Display, Fiber Inspection (Optional)
- Singlemode test port is APC; Multimode test port is UPC
- Filtered 1560nm LIVE/Filtered available
- 4.3-inch TFT touch screen.
- SC & FC interchangeable adapters
- Handheld (6.9" x 4.1" x 1.8")
- PDF Report Software Included

PART #	DESCRIPTION	PRICE
FC1315A26D	FIS ATLAS SM OTDR (1310/1550nm) with PM, LS, VFL, and gMAP software	\$1,495.00
FC8513U26D	FIS ATLAS MM OTDR (850/1300nm) with PM, LS, VFL, and gMAP software	1,795.00
FC1650A26D	FIS ATLAS OTDR (1650nm LIVE/Filtered) with PM, LS, VFL, and gMAP software	1,495.00
FCVMP	USB Video Inspection Probe for ATLAS OTDR (APC & UPC tips included)	895.00
FC1315VMP	FIS ATLAS SM OTDR with Video Inspection Probe Kit	1,995.00



Optical Power Meter Module

FC1315A26D



Optical Loss Test Set Module



OTDR Module



Ruggedized Version

NOTE: ADD "R" TO THE END OF THE PART NUMBER FOR RUGGEDIZED VERSION | ADD ADDITIONAL \$100.00 TO PRICE
NOTE: Call and speak with a Sales Representative for single wavelength product offerings

FIRECAT-1315

PART #	DESCRIPTION	PRICE
FIRECAT-8513	Dual Wavelength – Multimode 850/1300	2,000.00
FIRECAT-1315	Dual Wavelength – Singlemode 1310/1550	2,000.00
FIRECAT-QUAD	Quad Wavelength – MM/SM 850/1300/1310/1550	2,700.00

FIRECAT OTDR

The FIS Firecat OTDR provides an industry leading value with its low cost and easy functionality. This unit is perfect for both inexperienced and experienced technicians alike with its simple on screen 'soft key menus'. By providing the essentials for fiber optic troubleshooting, this OTDR is the perfect tool for basic link troubleshooting and is affordable enough for every truck, office or tool kit.

FEATURES:

- Dynamic Range - 23dB
- Easy Operation with 'Soft Key Menus'
- Small, Lightweight and Rugged
- Interchangeable Adapters
- Easy to Read Event Table
- USB Data Transfer
- Backlight Keypad and Screen for Easy Use in Dim Lighting Conditions
- Available in a Ruggedized Version for harsh conditions

ACCESSORIES

PART #	DESCRIPTION	PRICE
FIRECAT-AC110	AC Adapter 110v	\$35.00
FIRECAT-AC220	AC Adapter 220v	35.00
F1-FIRECAT-ST	ST Adapter	20.00
F1-FIRECAT-FC	FC Adapter	20.00
F1-FIRECAT-SC	SC Adapter	20.00

THUNDERBOLT OTDR

Fiber Optic Test Equipment



Starting at
\$3,195



FEATURES:

- Singlemode or Quad (SM/MM) Versions Available
- 36dB Dynamic Range
- Trace Overlay for Macro Bend Detection
- 9 Pulse Widths
- Gigabit Analyzer
- 8 Gigs of Storage
- 6.5" Color LCD Screen
- Available with SC, ST, or FC test port
- Unit Dimensions: 16.5"(L) x 7.5"(H) x 4"(W)



1 UNIT – 7 CRITICAL FIBER OPTIC TESTS

The perfect certification solution for contractors and enterprise technicians

This easy to use fiber optic test unit will exceed your expectations. Fiber Instrument Sales takes pride to be able to provide you a test equipment value that is unsurpassed.

FEATURES INCLUDE:

1. Fully operational OTDR with functions that enable complete trace analysis and automatically displays the event table that simplifies the operator's data collection.
2. **Power Meter** input providing a reading showing dBm power and dB loss with zero/reference capability.
3. **Visual Fault Locator** that is most commonly used to visibly identify continuity, bends or breaks in the cable.
4. **Enhanced Reporting Software** capability to provide Pass/Fail certification reports.
5. **Endface Inspection Probe (Optional)** USB inspection probe plugs right into the unit.

6.



7.



Link Checker with a quick and easy push of a button a technician reads a display of critical measurements including fiber link length and attenuation. Get results in 5 seconds. Tests at 1550nm - This feature is only available for Singlemode testing.

Gigabit Analyzer identify the fiber type and plug in. The unit measures length, dB loss, back reflection and compares to the fiber manufacturer's standards to determine if bandwidth requirements pass. Does not generate or evaluate an actual signal.

PART #	DESCRIPTION	PRICE
TB1315E	SM (1310/1550nm) OTDR with Gigabit Analyzer, and Link Checker	\$3,195.00
TBQUADE	SM/MM (850/1300/1310/1550nm) OTDR with Gigabit Analyzer, and Link Checker	4,795.00
TB1315	SM (1310/1550nm) OTDR with PM, VFL, Gigabit Analyzer, and Link Checker	3,495.00
TBQUAD	SM/MM (850/1300/1310/1550nm) OTDR with PM, VFL, Gigabit Analyzer, and Link Checker	4,995.00
F1DI1000	FIS digital USB endface inspection probe kit (tips included)	890.00

THUNDERBOLT TEST KITS

These special FIS made test kits allow the user to perform OTDR scans as well as take accurate dB loss readings for end-to-end link verification. The kit includes the standard version of our ThunderBolt OTDR, a power meter & light source kit with reference cords, a mini-VFL, and a special cleaning kit.

PART #	DESCRIPTION	PRICE
TB1315KIT	FIS ThunderBolt (1310/1550nm) SM OTDR, PM/LS kit with file storage, mini-VFL, and cleaning kit	\$3,795.00
TBQUADKIT	FIS ThunderBolt (850/1300/1310/1550nm) SM/MM OTDR, PM/LS kit with file storage, mini-VFL, and cleaning kit	5,495.00

* If OTDR launch reels are desired, call FIS to talk about which type is needed.



**BEST
VALUE**




FIS xWDM CHANNEL ANALYZERS

The FIS "xWDM" Channel Analyzers are among the most rugged, affordable, and full-featured handheld analyzers on the market, designed for superior performance in field operations. The DWDM Channel Analyzer supports up to 96 channels with 50 and 100 GHz spacing and features a 6 GHz slicing line graph mode. With a user-friendly touch screen and rapid twice-per-second scanning, it ensures precise measurements with power drift monitoring and customizable scale limits. Users can easily select channel numbers in wavelength or frequency and view data in bar graph, line graph, or table mode on a 3.5" bright auto-rotating color touchscreen. Similarly, the CWDM Channel Analyzer, available in various channel configurations with 20 nm spacing, offers an intuitive interface, durable construction, and fast scanning for efficient CWDM analysis. Both analyzers allow users to set pass/fail thresholds, store up to 1000 tests, and seamlessly download reports via USB. The included certification software streamlines documentation, while the onboard Help system simplifies setup. An optional Video Inspection Scope ensures connector cleanliness before testing, making these analyzers the ultimate choice for professionals seeking precision, durability, and efficiency in optical network testing.

FEATURES

- 50 or 100 GHz DWDM Spacing
- Up To 96 Channels DWDM
- Bar Graph, Data Table, & DWDM 6.25 GHz Line Graph
- 20nm CWDM Channel Spacing
- 8,10 or 18 Channels CWDM
- Fast Real Time with <1/2 second Update
- Zoom in on Active Channels
- Rugged Case w/ Impact Resistant Bumpers
- Solid State Optics - No Moving Parts
- Adjustable Pass/Fail Thresholds
- 650nm VFL
- 3.5" Touch Color Display
- Stores up to 1,000 tests
- IEC61300-3-35 auto center/pass/fail video inspection feature for use with the optional video probe



VIS-300
Optional



Build Your Own Channel Analyzer

OV350 - XX - XX

Model

OV350 Platform with VFL included

Channel Configuration

DW96 = DWDM 96 Channel (C-Band) [\$4,195.00]

CW18 = CWDM Analyzer - 18 Channel (1271-1611nm) [\$2,495.00]

CW8 = CWDM Analyzer - 8 Channel (1471-1611nm) [\$1,795.00]

CW18DW96 = xWDM Analyzer Combination - CWDM 18 Channel (1271-1611nm) and DWDM 96 Channel (C-Band) [\$5,995.00]

Digital Inspection Probe

VIS = Video Inspection Probe with Adapter Tips (200x) [\$750.00]

**Custom
Channel
Packages
Available**

FIS GEMINI BI-DIRECTIONAL LTS

The new FIS Bi-Directional loss test set is a great low-cost test set for when bi-directional testing and averaging is needed. The Gemini Test Set, which is used as a pair of units (main & remote) is made to measure the cable length, the dB link loss and the ORL (Optical Return Loss) in both directions and then has the ability to automatically average the test data of both directions. This allows for the most complete fiber optic characterization one can achieve in Tier I testing.

By having the main and remote units connected onto the same fiber on each end, the user only needs to push one button to initiate the 10 second test. This test set can also be used as a traditional power meter and light source kit, has an on-board VFL and memory to store up to 1,000 files. With a measurement range of up to 40km, this value oriented test set is ideal for port-installation verification, troubleshooting as well as full Tier I certification.

FEATURES

- Measures cable length, db loss and ORL **bi-directionally** within ten seconds
- 4" Color Touch Screen Display
- Used on cable lengths up to 40 kilometers
- Stores up to 1,000 files
- Power Meter and Light Source can function independently
- LTS is used as a pair of units each having a Power Meter and Light Source
- No loopback needed

FIS DWDM CHANNEL ANALYZER

PART #	DESCRIPTION	PRICE
F1BIDI1315	FIS Gemini Bi-Directional OLTS (pair), 1310nm/1550nm, with VFL	\$3,495.00
F1BIDI131516	FIS Gemini Bi-Directional OLTS (pair), 1310nm/1550nm/1625nm, with VFL	4,995.00





DID YOU KNOW...

Utilizing Two Launch Cables (Pulse Suppressors) Allows Accurate Measurements

Using two (2) Pulse Suppressors, sometimes referred to as a launch and receive cable, allows more accurate OTDR measurements of the cable link under test. It allows the pulse to settle down prior to the first connector on the cable link and lets the technician determine its insertion loss and back reflection (ORL).

A receive cable placed on the far connector at the end of the cable is used to determine its insertion loss and back reflection (ORL).

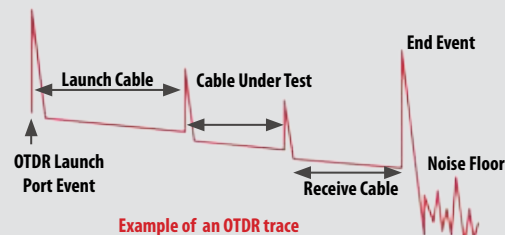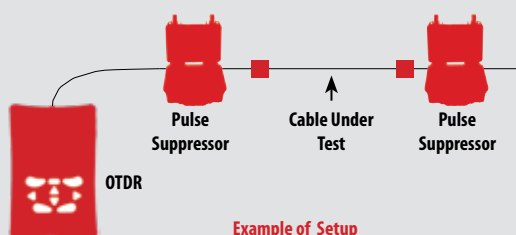



**D-SERIES
3 YEAR
WARRANTY**



**ALSO
AVAILABLE
WITH iOLM**



THE MAXTESTER OTDR D-SERIES

The MaxTester 700D Series builds on the proven tablet-inspired, lightweight and rugged OTDR MaxTester platform. The familiar 7-inch, outdoor-enhanced touchscreen continues to deliver an unprecedented user experience and its intuitive Windows-like GUI ensures a fast learning curve. The OTDR environment offers icon-based functions, instant boot-up, automatic macrobend finders as well as improved auto and real-time modes. The MaxTester 700D Series is a line of genuine high-performance OTDRs from the world's leading manufacturer. It delivers EXFO's tried and true OTDR quality and accuracy along with the best optical performance for right-first-time results, every time. The plug-and-play hardware options, like the VFL, power meter and USB tools, make every technician's job easier. Ultimately, the MaxTester 700D Series is small enough to fit in your hand and big enough to fit all your needs! All D-Series MaxTesters come with a 3-year warranty.

FEATURES

- Rugged, handy, lightweight, tablet-inspired design built for outside plant
- 7-inch, outdoor-enhanced touchscreen
- 12-hour battery life
- Dead zones: EDZ 0.5 mtr, ADZ 2.5 mtr (Max-730)
- Swap-Out connector, field replaceable for optimal performance over time without calibration
- iOLM-ready: intelligent & dynamic application that turns complex OTDR trace analysis into a one-touch task

MAX-715D OTDR

Optimized for the P2P testing and troubleshooting of FTTx architectures, and ideal for testing short fibers (e.g., inside a CO, FTTx drop cable or FTTA/DAS installations) (30 dB).

PART #	DESCRIPTION	PRICE
TK-MAX-715D-SM1-XX	MAX-715D, Last Mile SM OTDR 1310/1550nm, 30/28 dB (9/125µm)	\$4,575.00
TK-MAX-715D-SM8-XX	MAX-715D, Last Mile SM OTDR Port 1: 1310/1550nm, 30/28 dB (9/125µm) Port 2: Filtered 1650nm, 28 dB (9/125µm)	7,645.00
PM2X-XX	Power Meter ONLY (GeX detector) With FOA-XX: Connector Adapter	820.00
VPM2X-XX	VFL + Power Meter - Visual Fault Locator (650nm) With 2.5mm Universal Adapter - Power Meter (GeX detector) With FOA-XX: Connector Adapter	1,085.00
GP-3207	Replacement APC Swap-out connector (Also fits 730D)	390.00
GP-3208	Replacement UPC Swap-out connector (Also fits 730D)	390.00
RF	Built-in Wi-Fi and Bluetooth Capability	275.00

MAX-720D OTDR

Efficient testing of closely spaced events, such as patchcords and patch panels in COs, and optimized for the P2P testing of any access network (36 dB).

PART #	DESCRIPTION	PRICE
MAX-720D-SM1-XX	MAX-720D, Access SM OTDR 1310/1550 nm, 36/35 dB (9/125 µm)	\$5,470.00
MAX-720D-Q1-QUAD-XX	MAX-720D, QUAD OTDR Port 1: 850/1300 nm, 27/29 dB (50/125 & 62.5/125 µm) Port 2: 1310/1550 nm 36/35 dB (9/125 µm)	9,850.00
PM2X-XX	Power Meter ONLY (GeX detector) With FOA-XX: Connector Adapter	820.00
VPM2X-XX	VFL + Power Meter - Visual Fault Locator (650nm) With 2.5mm Universal Adapter - Power Meter (GeX detector) With FOA-XX: Connector Adapter	1,085.00
RF	Built-in Wi-Fi and Bluetooth Capability	275.00

MAX-730D OTDR

Fully featured, entry-level, dedicated OTDR with tablet-inspired design, suitable for P2P access network and metro link testing. Optimized to test through optical splitters, for seamless end-to-end FTTH characterization and troubleshooting. Filtered 1625nm port for live fiber testing available.

PART #	DESCRIPTION	PRICE
MAX-730D-SM1-XX	MAX-730D, FTTx/PON SM OTDR 1310/1550 nm, 39/38 dB (9/125 µm)	\$7,860.00
MAX-730D-SM3-XX	MAX-730D, FTTx/PON SM OTDR 1310/1550/1625 nm, 39/38/39 dB (9/125 µm)	9,945.00
MAX-730D-SM8-XX	MAX-730D, SM OTDR 1310/1550/Filtered 1650 nm, 39/38/39 dB (9/125 µm)	10,050.00
PM2X-XX	Power Meter ONLY (GeX detector) With FOA-XX: Connector Adapter	820.00
VPM2X-XX	VFL + Power Meter - Visual Fault Locator (650nm) With 2.5mm Universal Adapter - Power Meter (GeX detector) With FOA-XX: Connector Adapter	1,085.00
RF	Built-in Wi-Fi and Bluetooth Capability	275.00

Models	MAX-715D	MAX-720D	MAX-730D
Configurations	1310/1550 nm 1310/1550 nm and 1650 live*	1310/1550 nm and 1625 live*	1310/1550 nm 1310/1550 nm and 1650 live*
Dynamic range at 1310/1550/1625	30/28/28 dB	36/35/35 dB	39/38/38 dB
ADZ/EDZ	0.9m / 3.6m	SM 0.7m/3m	0.5m/2.5m
PON	N/A	Up to 1x32	Up to 1 x 128

*** SEE PAGES 21, 27,31, 44, 45 FOR VIDEO INSPECTION PRICES**



**EXFO OPTICAL
WAVE EXPERT**

EXFO OPTICAL WAVE EXPERT - DWDM TESTING SOLUTION

An all-in-one DWDM Channel Checker and OTDR in a solid state compact form. The rugged MaxTester platform provides the most efficient and practical form factor for field use.

FEATURES

- Integrated DWDM channel checker and OTDR on a single port (patent-pending)
- Intelligent channel power level measurements
- Compact and portable form factor
- iOLM-ready: one-touch multiple acquisitions, with clear MUX/DEMUX characterization
- C-BAND ITU-T G.692 DWDM grid channels (12-62)
- Bar graph and table view on wide touchscreen display
- In-channel and testing of active networks
- Intuitive graphical user interface (GUI) and workflow

PART #	DESCRIPTION	PRICE
MAX-740C-DWOCC-iO-iADV-EA-EUI-91-VPM2x-FOA-54B-RF	iOLM Advanced, OTDR, VFL, Power Meter, Wi-Fi, Bluetooth	\$25,660.00
MAX-740C-DWOCC-OTDR-EA-EUI-91-VPM2x-FOA-54B-RF	OTDR, VFL, Power Meter, Wi-Fi, Bluetooth	23,255.00
MAX-740C-DWOCC-iOLM-00-EA-EUI-91-VPM2x-FOA-54B-RF	iOLM, OTDR, VFL, Power Meter, Wi-fi, Bluetooth	23,258.00
MAX-740C-DWOCC-OTDR-EA-EUI-91-00-RF	OTDR, Wi-Fi, Bluetooth	22,170.00

PLEASE CALL YOUR FIS SALES REPRESENTATIVE FOR OTHER AVAILABLE CONFIGURATIONS



EXFO FTB-1 PRO SINGLE- OR DUAL-CARRIER OTDR PLATFORM WITH OTDR MODULE

The FTB-1 PRO is a light-weight compact test platform allowing field technicians to carry out dedicated optical test applications simply and efficiently, thanks to its ultra-powerful processing and highly intuitive interface. Loaded with utilities, it provides all the tools required to maximize field testing. Now available for single- or dual-carrier configurations to slot FTBx test modules, the built-in intelligence of the FTB-1 PRO empowers frontline technicians to take field-testing efficiency to the next level.

FEATURES

- 8-inch color multi-touch widescreen
- Ethernet port (10/100/1000 Base-T)
- Headset/Microphone port
- MicroSD card slot for extended storage space
- Optional plug-and-play power meter and VFL
- Remote access to your unit (via VNC or Remote Desktop)



FTB-1 v2 iOLM

CONTACT FIS FOR CUSTOM CONFIGURATION PRICING AND/OR TO ARRANGE A DEMONSTRATION.

Build Your Own FTB-1 v2

TK-1-700 - XX - XX - XX - XX - XX - XX - XX - XX - XX

Model

TK-1v2-PRO-700D Mainframe - (SC=\$2,345 or DC=\$2,555 with module)
(Specify Single or Dual Carrier Version (SC or DC))

Display

S1 = TFT Active Screen (Standard)
S2 = Outdoor Enhanced Screen (\$320)

Memory

64G = 64 GB internal memory (flash)

Wi-Fi/Bluetooth Option

RF = With RF Capability - Wi-Fi and Bluetooth (\$250)

Power Meter

00 = Without power meter PM / VFL
VPM2X = VFL platform, PM; GeX detector (\$990)
VPM2X-CWDM = VFL platform; PM; GeX detector; CWDM wavelengths calibrated from 1270 nm to 1610 nm (\$1,425)

Connector Adapter - Included

FOA-22 = FC/PC, FC/SPC, FC/UPC, FC/APC
FOA-98 = LC: LC/PC, LC/SPC, LC/UPC, LC/APC
FOA-54 = SC: SC/PC, SC/SPC, SC/UPC, SC/APC

iOLM Software Option

00 = iOLM Standard
iADV = iOLM Advanced (\$765)
iLOOP = iOLM loopback mode (\$1,090)
iCERT = iOLM tier-2 certification (\$435)

Digital Inspection Probe

FP410B-XX = Inspection Probe 200x/400x, Manual Focus, No Auto Analysis (\$1,440)
FP420B-XX = Inspection Probe 200x/400x, Manual Focus, Auto Center, Auto Analysis (\$2,195)
FP425B = Wireless Inspection Probe 200x/400x, Auto Center, Auto Analysis (\$3,155)
FP430B-XX = Inspection Probe 200x/400x, Auto Focus, Auto Center, Auto Analysis (\$2,670)
FP435B = Wireless Inspection Probe 200x/400x, Auto Focus, Auto Center, Auto Analysis (\$3,630)

XX- APC or UPC must be specified

OTDR Adapters XX - (Place EA Before the Adapter for APC Polish or EI for UPC Polish) - Included in Module Price

XX-EUI-89 = FC Adapter
EUI-98 = LC adapter
XX-EUI-91 = SC Adapter

OTDR Module(s)

FTBx-720D-SM1-XX = SM 1310/1550nm, 36/35dB (\$5,615)
FTBx-730D-SM1-XX = SM 1310/1550nm, 39/39dB (\$7,645)
FTBx-720D-Q1-QUAD-XX = MM/SM 850/1300/1310/1550nm, 27/29/36/35dB (\$10,375)
FTBx-720D-SM8-XX = SM OTDR, 1310/1550 nm and 1650 nm live on single port (\$10,480)
FTBx-730D-SM8-XX = SM OTDR module, 1310/1550 nm and 1650 nm live on single port
* for live fiber testing with in-line power meter (\$12,240)

Replace XX with: **OTDR** = Enables OTDR application only; **iOLM** = Enables iOLM application only; **Oi** = Enables OTDR and iOLM applications

EXFO ACCESSORIES FOR OTDR/SOURCE & POWER METER ADAPTERS

PART #	DESCRIPTION	PRICE
FOA-32	ST Adapter for Power Meter	\$90.00
FOA-54B	SC Adapter for Power Meter	90.00
FOA-22	FC Adapter for Power Meter	90.00
FOA-98	LC Adapter for Power Meter	190.00
FOA-U12	Universal 1.25mm Adapter for Power Meter	200.00
FOA-U25	Universal 2.5mm Adapter for Power Meter	200.00
EUI-89	FC Source Adapter	130.00
EUI-90	ST Source Adapter Compatible with UPC Connector Interface ONLY	130.00
EUI-91	SC Source Adapter	130.00
EUI-98	LC Source Adapter 2.5mm - 1.25mm Reducer	210.00
PMA-22	FC Connector adapter for EPM-50 Power Meter (see page 43)	28.00
PMA-32	ST Connector adapter for EPM-50 Power Meter (see page 43)	28.00
PMA-54	SC Connector adapter for EPM-50 Power Meter (see page 43)	28.00



FOA-54



EXFO OPTICAL EXPLORER (OX1) - VERIFY & TROUBLESHOOT FIBER LINKS

Optical Explorer goes beyond basic testing as compared to power meters and fault locators. It offers a brand new testing approach powered by multiple pending patents. Optical Explorer determines overall link quality and tracks potential faults. Unlike traditional instruments in their toolbox, Optical Explorer won't leave field technicians blind to faults. Each technician gets more autonomy to solve issues, enabling a leaner troubleshooting process that doesn't require several technicians with various skills.


FEATURES

- Displays fiber link (length, loss, ORL and power) in under 3 seconds, through single-ended testing
- On-the-spot detection and location of common causes of failures using EXFO's patent-pending Fault Explorer
- Intelligent device:
 - › No settings required
 - › Built-in expertise to interpret link quality with patent-pending EXFO Advisor (5-star ranking system)
 - › Diagnostics with suggested corrective actions
- PDF report generation through smart app
- Save on cost of ownership: lifetime calibration, no factory returns thanks to our patent-pending Click-Out optical connector
- Rechargeable battery for over 10 hours of use on a single charge
- Built-in light source and power checker (dual-band available)
- 3 year warranty

Optical Explorer includes



PRO version also includes

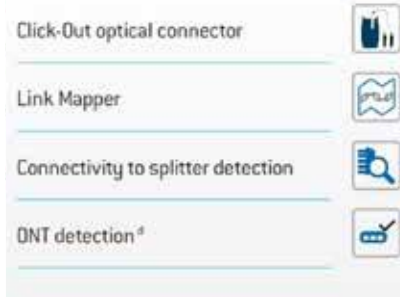

PART #	DESCRIPTION	PRICE
OX1I88	EXFO Optical Explorer USB-A to USB-C Cable w/Soft Carry Case, 1310/1550nm	\$2,950.00
OX1PROI88	EXFO Optical Explorer PRO w/USB-A to USB-C Cable & USB AC Adapter, 1310/1550nm	3,605.00
OX1PROM88	EXFO OX1 PRO model Optical Explorer SC/APC (1650 Live)	5,030.00
OX1PROMPPM88	EXFO OX1 PRO model Optical Explorer SC/APC (1650 Live) with dual band 1490/1577nm power checker	5,470.00
OX1PROMI88	Last Mile Installation & Maintenance Optical Explorer - PRO version, SC/APC, 1310/1550/1650 nm (live)	6,560.00
OX1M88	Last Mile Maintenance Optical Explorer 1650 nm (live)	4,370.00
GP-3152	SC/APC Click-Out™ Optical Connector For OX1-PRO models	410.00
GP-3153	SC/UPC Click-Out™ Optical Connector For OX1-PRO models	410.00

PLEASE CALL YOUR FIS SALES REPRESENTATIVE FOR OTHER AVAILABLE CONFIGURATIONS AND LAUNCH CABLES

EXFO OPTICAL EXPLORER (OX1) ACCESSORIES

EXFO GP-3186 GLOVE

Store an OX1, a TCB in the back pocket, a cleaner and a VFL 140 in side pocket. Hold from the side hand-strap or the neck strap. Protect the OX1 display.

GP-3172 KICK-STAND AND VFL HOLDER

Carry a VFL 140 on the OX1 unit. Stabilize the OX1. Add a hand-strap. Add an o-ring to hang it from a hook.

PART #	DESCRIPTION	PRICE
GP-3186	Hands-free glove	\$59.00
GP-3172	3-in-1 accessory combining kickstand, hand-strap and VFL holder (compatible with FLS-140)	44.50
GP-3150	New/spare battery for OX1	320.00





FIP-200 CONNECTOR CHECKER™

The FIP-200 Connector Checker™ is more than a handy tool; it's a commitment to the future of broadband service activation. By addressing the core challenges that have historically impeded fiber inspection, the FIP-200 paves the way for a new era of efficiency, quality and compliance in network connectivity. The FIP-200 makes testing accessible to all field crews, regardless of size or experience level.

PART #	DESCRIPTION	PRICE
FIP200KIT1	EXFO FIP200 Fiber Inspection Kit: SC/APC tip	\$1,505.00
FIP200KIT2	EXFO FIP200 Fiber Inspection Kit: SC/APC+LC/APC tips	1,565.00



EXFO FIBER INSPECTION PROBES (FIP-410B/420B/430B/435B) AND TIPS

An intelligent and automated inspection tool. The 420B features automatic fiber image-centering function to reduce test time. The Probe has on-board connector end face analysis via ConnectorMax2. Includes a Pass/Fail indicator for immediate diagnosis of connector cleanliness. The FIP-430B is 100% automated and the first of its kind. The probe will auto detect, auto center, auto focus, analyze and report findings of connector end face.

PART #	DESCRIPTION	PRICE
FIP-410B-XX	USB Digital Video Inspection Probe with Triple Magnification, APC or UPC Connector & Adapter Tips (probe only)	\$1,495.00
FIP-420B-XX	USB Digital Video Inspection Probe with Automated Pass/Fail analysis, Auto Centering and Triple Magnification, APC or UPC Connector & Adapter Tips (probe only)	2,185.00
FIP-430B-XX	USB Digital Video Inspection Probe with Auto Focus, Auto Capture, Auto Detect, Automated Pass/Fail analysis, Auto Centering and Triple Magnification, APC or UPC Connector & Adapter Tips (probe only)	2,845.00
FIP-435B-XX	Wireless Digital Video Inspection Probe, Automated Focus, Automated Pass/Fail Analysis, Triple Magnification and Auto Centering, APC or UPC Connector & Adapter Tips	3,280.00
FIPT-400-ST	ST bulkhead adapter (UPC Only)	90.00
FIPT-400-U12M	Universal patch cable tip 1.25mm ferrules	90.00
FIPT-400-U25M	Universal patch cable tip 2.5mm ferrules	90.00
FIPT-400-U25MA	Universal patch cable tip 2.5mm APC ferrules	125.00
FIPT-400-U12MA	Universal patch cable tip 1.25mm APC ferrules	135.00
FIPT-400-FC-SC	FC and SC tip for bulkhead adapter (UPC)	90.00
FIPT-400-FC-APC	FC/APC tip for bulkhead adapter	155.00
FIPT-400-SC-APC	SC/APC tip for bulkhead adapter	125.00
FIPT-400-LC-SQ	LC tip for bulkhead adapter	90.00
FIPT-400-LC-APC	LC/APC tip for bulkhead adapter	135.00
STIP-MPO-U	MPO/UPC SmartTip	275.00
STIP-MPO-A	MPO/APC SmartTip	275.00
FIPT-400-LC-D	FIP tip: LC Duplex patchcord (Not compatible with FIP410B)	230.00
FIPT-400-LC-D-APC	FIP Tip: LC/APC Duplex patchcord (Not compatible with FIP410B)	230.00
FIPT-400-LC-K	FIP Tip: LC Kit Includes: LC Tip for PC Bulkhead Adapter; LC APC Tip for Bulkhead Adapter; Universal Patchcord Tip for 1.25 mm Ferrules and Universal Patchcord Tip for 1.25 mm Ferrules APC	410.00
FIPT-400-LC-L	Extended LC/PC Bulkhead Tip	450.00



PXM/LXM MPO OPTICAL LOSS TEST SET (OLTS)

The PXM/LXM combo is an MPO tester designed to efficiently qualify a large number of MPO links. It tests MPO-8, MPO-12, MPO-16 cables at 2 wavelengths in just 1 second, the fastest test time in the industry. The FastTest feature provides loss per channel at the 2 selected wavelengths, as well as the polarity type of the link under test automatically when continuity is detected.

PART #	DESCRIPTION	PRICE
TK-PXM-LXM-SM1	MPO singlemode Tier-1 certification kit: (PXM: multi-fiber power meter, single-mode multi-fiber light source 1310/1550 nm, MPO-12-SM-TJ-KIT1: singlemode MPO-12 test jumper kit, GP-10-061: medium soft carrying case)	\$15,095.00
TK-PXM-LXM-MM1	MPO multimode Tier-1 certification kit: (PXM: multi-fiber power meter, multimode multi-fiber light source 850/1300 nm, MPO-12-MM-TJ-KIT1: multimode MPO-12 test jumper kit, GP-10-061: medium soft carrying case)	15,745.00
TK-PXM-LXM-QUAD	MPO SM/MM Tier-1 certification kit: (PXM: multi-fiber power meter, MM multi-fiber light source 850/1300 nm, SM multi-fiber light source 1310/1550 nm, SM/MM test jumper kits included: medium soft carrying case)	25,195.00



EX1 FTTH AND BUSINESS SERVICES TESTER / EX10 MULTIGIGABIT RESIDENTIAL AND BUSINESS SERVICES TESTER

The EX1, paired with an Android or iOS smart device is a one-of-a-kind Ethernet, GPONa and Wi-Fi tester designed to qualify fiber to the home (FTTH) and business customers' quality of experience (QoE). The pocket-sized solution enables communication service providers and MSOs to validate full line rate Gigabit Ethernet as well as Wi-Fi services to their subscribers. The advantage of the EX1 is three-fold: it includes a built-in dedicated Wi-Fi chipset as well as utilizes the world-leading Speedtest by Ookla algorithm, giving repeatable and reliable metrics, every time.

The EX10 provides both wireline and wireless testing capability, providing comprehensive insights that field technicians can use to remedy any situation. Operators can prove they deliver both promised throughput and unparalleled quality of experience at the customer premises.

PART #	DESCRIPTION	PRICE
EX1	Gigabit Multi-Service Test Pod	\$1,370.00
EX10-GP-10-115	EX10 Ten Gigabit Test Pod with 100M to 10G, with Small Soft Carrying Case	2,825.00
EX10-PRO-GP-10-115	EX10 PRO 10 Gigabit Multi service Test Pod with 100M to 10G, with Small Soft Carrying Case	3,775.00



VIAVI



WDM
OTDRs

T-BERD 4000 V2



VIAVI - WDM OTDRs T-BERD 4000 V2 PACKAGES OPTICAL TEST PLATFORM

MODULAR TEST PLATFORM DESIGNED FOR THE INSTALLATION,
TURN-UP AND MAINTENANCE OF FIBER OPTIC NETWORKS

FEATURES

- Dual-modular handheld platform
- Large 9-inch high visibility touchscreen with permanent function keys
- Essential tools integrated and supported in the platform (visual fault locator, optical power meter, optical microscope and talkset)
- Flexible connectivity; Ethernet, Wi-Fi, Bluetooth
- Smart Access Anywhere (SAA) for remote control & field tech support
- StrataSync enabled — centralized cloud based asset, configuration, test data and workflow management

VIAVI T-BERD 4000 OTDR PACKAGES (INCLUDES PLATFORM AND MODULE)

PART #	DESCRIPTION	PRICE
TB4K-DIS-QUAD-S	T-BERD 4000v2 850/1300/1310/1550nm QUAD Module OTDR (26/24/37/35dB Dynamic Range) with PM, LS, VFL, Wi-Fi/Bluetooth, SAA-L2 and Launch Cable	\$9,650.00
TB4-2-B	T-BERD 4000v2 1310/1550nm B Module OTDR (42/40dB Dynamic Range) with PM, LS, VFL, Wi-Fi/Bluetooth, SAA-L2 and Launch Cable	12,967.00
TB4-3F65-B	T-BERD 4000v2 1310/1550nm/Filtered 1650nm B Module OTDR (42/40/40dB Dynamic Range) with PM, LS, VFL, Wi-Fi/Bluetooth, SAA-L2 and Launch Cable	15,357.00
TB4-2-C	T-BERD 4000v2 1310/1550nm C Module OTDR (46/45dB Dynamic Range) with PM, LS, VFL, Wi-Fi/Bluetooth, SAA-L2 and Launch Cable	14,787.00
TB4-3F62-C	T-BERD 4000v2 1310/1550nm/Filtered 1625nm C Module OTDR (46/45/45dB Dynamic Range) with PM, LS, VFL, Wi-Fi/Bluetooth, SAA-L2 and Launch Cable	18,761.00
TB4-2-B-MPO	T-BERD 4000v2 1310/1550nm B Module OTDR (42/40dB Dynamic Range) and MPO Switch Module, with PM, LS, VFL, Wi-Fi/Bluetooth, SAA-L2 and Fanout Cable	18,545.00
TB4-3F65-B-MPO	T-BERD 4000v2 1310/1550nm/Filtered 1650nm B Module OTDR (42/40/40dB Dynamic Range) and MPO Switch Module, with PM, LS, VFL, Wi-Fi/Bluetooth, SAA-L2, and Fanout Cable	21,981.00

VIAVI T-BERD 4000 BI-DIRECTIONAL OLTS, OTDR PACKAGES (INCLUDES PLATFORM AND MODULE)

PART #	DESCRIPTION	PRICE
TB4-FCOMP2-FF	T-BERD 4000v2 1310/1550nm B FiberComplete - IL/ORL and Fault Finder	\$6,075.00
TB4-FCOMP2-B	T-BERD 4000v2 1310/1550nm B FiberComplete - IL/ORL and OTDR (42/40dB Dynamic Range) with PM, LS, VFL, Wi-Fi/Bluetooth, SAA-L2 and Launch Cable	11,319.00
TB4-FCOMP3L65-B-MPO	T-BERD 4000v2 1310/1550/1650nm B FCOMP Module Bi-dir IL/ORL/OTDR (42/40/40dB Dynamic Range) and MPO Switch Module, with PM, LS, VFL, Wi-Fi/Bluetooth, SAA-L2, reference MPO kit and Fanout Cable	23,292.00

VIAVI T-BERD 4000 XWDM PACKAGES (INCLUDES PLATFORM AND MODULE)

PART #	DESCRIPTION	PRICE
TB4K-DOTDR-AP0	T-BERD 4000v2 DWDM OTDR kit with DWDMC OTDR, Cable-SLM, PM, VFL, Wi-Fi and SAA-L2	\$16,445.00
TB4K-DOTDR-AP2	T-BERD 4000v2 DWDM and CWDM OTDR kit with DWDMC OTDR, CWDM10U OTDR, Cable-SLM, PM, VFL, Wi-Fi and SAA-L2	23,339.00
TB4-DWDM-P2	T-BERD 4000v2 DWDM OTDR and DWDM OCC-4056C with Optical Channel Checker, DWDMC OTDR, Cable-SLM, PM, VFL, Wi-Fi and SAA-L2	26,525.00
TB4-OCV-B-APC	T-BERD 4000v2 with Full Band Optical Channel Verifier	11,845.00
TB4-OSA-P-APC	T-BERD 4000v2 with Full Band Optical Spectrum Analyzer with Tunable SFP SW option to simulate Tx (SFP not included).	13,285.00

VIAVI 4100 SERIES OTDR, XWDM OTDR, OCC AND OSA MODULES AND MODULE OPTIONS

PART #	DESCRIPTION	PRICE
E41CWDM10L-APC	10 Wavelengths CWDM OTDR from 1271 to 1451nm - APC	\$ 11,459.00
E41CWDM10U-APC	10 Wavelengths CWDM OTDR from 1431 to 1611nm - APC	11,459.00
E41DWDMC-APC	DWDM OTDR Module - C-Band - APC	22,279.00
2331/12	OCC-4056C; DWDM Analyzer with SFP bay - APC	7,149.00
410CV-APC	OCV-4100 Full Band Optical Channel Verifier APC	8,859.00
410SA-APC	OSA-4100 Full Band Optical Spectrum Analyzer Module (Nano OSA)	10,025.00
E4126B-APC	4100 Module B OTDR - 1310/1550nm B Module OTDR (42/40dB Dynamic Range) - APC	6,949.00
E4138FB65-APC	4100 Module B OTDR - 1310/1550nm/Filtered 1650nm B Module OTDR (42/40/40dB Dynamic Range) - APC	10,385.00
E4126C-APC	4100 Module C OTDR - 1310/1550nm C Module OTDR (46/45dB Dynamic Range) - APC	9,815.00
E4138FC65-APC	4100 Module C OTDR - 1310/1550nm/Filtered 1650nm B Module OTDR (46/45/43dB Dynamic Range) - APC	13,789.00
MPO12MODKIT-SM	Singlemode MPO Switch Kit with 1x12 Module Switch and Launch Cables	5,665.00
EOTDR-TO-FCOMP-UPG	Add FiberComplete To 4100 B OTDR Modules - If Module PM (E41otdrpm) is Calibrated	1,900.00
ETRUEBIDIR-FCOMP-PRO-UPG	True Bidirectional Upgrade Software License - On-Board Real Time Bidirectional Event Analysis	1,545.00
410SNR-UPG	OCV OSNR Software Option (for OCV-4100)	795.00



TB4-FCOMP2-FF
(Pair Required)



DWDM OTDR
Module



VIAVI - SMARTOTDR™ HANDHELD OTDR FIBER TESTER

Affordable, easy-to-use handheld testing for technicians at any level. The lightweight and compact SmartOTDR solution performs all essential fiber tests for metro and access networks with:

- OTDR measurements
- Fiber inspection with automated end-face analysis
- Optical loss testing (optical light source and optical power meter)
- Visual fault location

Key Benefits

- Simplifies OTDR analysis with Smart Link Mapper (SLM) option
- Automates testing with objective, pass/fail results

KEY FEATURES

- Single-/dual-/tri-wavelength versions with 1310, 1550, and in-service filtered 1625nm or 1650nm filtered wavelengths
- Integrated CW light source
- PON optimized to test through a 1x128 splitter
- 4G/5G connectivity via USB, Bluetooth/ Wi-Fi
- All-day battery life



FSTOTDR-PRO-IM-APC

PART #	DESCRIPTION	PRICE
FSTOTDR-PRO-I-APC	SmartOTDR Fiber Installation Tester PRO Kit 1310/1550nm (37/35dB Dynamic Range) with PM, LS, VFL and Wi-Fi/Bluetooth - APC	\$5,289.00
FSTOTDR-PRO-IM-APC	SmartOTDR Fiber Install/Maint. Tester PRO Kit 1310/1550/Filtered 1650nm (37/35/32dB Dynamic Range) with PM, LS, VFL and Wi-Fi/Bluetooth - APC	7,489.00
FSTOTDR-PREMIUM-I-APC	SmartOTDR Fiber Installation Tester PREMIUM Kit 1310/1550nm (40/40dB Dynamic Range) with PM, LS, VFL, Wi-Fi/Bluetooth and FTTH-SLM BASE - APC	7,599.00
FSTOTDR-PREMIUM-IM-APC	SmartOTDR Fiber Install/Maint. Tester PREMIUM Kit 1310/1550/Filtered 1650nm (40/40/41dB Dynamic Range) with PM, LS, VFL, Wi-Fi/Bluetooth and FTTH-SLM BASE - APC	10,375.00
FOPT-PRO-M-APC	Fiber Meter @1650nm with Dual-band Selective Power Meter (1490/1550nm or 1490/1577nm), VFL, Wi-Fi/Bluetooth and OptiTrak App SW. Carrying case, glove and 20m launch cable included	4,569.00

VIAVI T-BERD 2000 xWDM PACKAGES

VIAVI T-BERD 2000 mainframe is a handheld single modular unit which can accept a wide variety of modules for virtually any testing application. Whether it be standard or PON OTDR, Bi-directional Insertion Loss Testing, WDM OTDR or Optical Spectrum Analyzer.

VIAVI T-BERD 2000 xWDM PACKAGES (INCLUDES PLATFORM AND MODULE)

PART #	DESCRIPTION	PRICE
TB2-CWDM-P1	T-BERD 2000 with 1431-1611nm CWDM OTDR	\$ 9,759.00
TB2-DWDMOCC-P1	T-BERD 2000 with DWDM Channel Checker	8,485.00
TB2-OCV-B-APC	T-BERD 2000 with Full Band Optical Channel Verifier	12,030.00
TB2-OSA-P-APC	T-BERD 2000 with Full Band Optical Spectrum Analyzer with Tunable SFP SW option to simulate Tx (SFP not included).	13,771.00



SMARTCLASS™ BI-DIRECTIONAL TESTSETS (FIBER MPOLX & FIBER OLTS-85/85P)

The VIAVI SmartClass™ Fiber MPOLx is the only optical loss test set dedicated to performing length, loss, polarity, and inspection tests for Tier 1 certification using MPO fiber, compliant with IEC 61280-4-5 and TIA-526-28. It combines a source and power meter with native MPO connectivity for efficient and reliable testing. The Viavi OLTS-85/85P handhelds offer the fastest and simplest Tier 1 fiber certification, allowing technicians to measure length, optical loss (two fibers, two wavelengths), check polarity, inspect end faces, and generate certification reports.

PART #	DESCRIPTION	PRICE
2329/21	SM MPOLx Kit - Single mode loss kit (1310/1550nm, with MPO LS and broadband MPO PM	\$14,744.45
2329/24	MM MPOLx Kit - Multimode loss kit (850/1300nm), with MPO LS and broadband MPO PM	12,014.95
2329/25	QUAD MPOLx Kit - SM MPO LS (1310/1550nm), MM MPO LS (850/1300nm), Broadband MPO PM	24,035.00

- All Kits include MPO cleaning tool, carry case (soft and hands free), MTP PRO test reference cords, and MTP PRO tool for adding/removing pins
- PCM - Built in Patch Cord Microscope

All MPO Kits have the option to add the builtin patchcord microscope (PCM)

PART #	DESCRIPTION	PRICE
2325/31	OLTS-85 Single mode (1310/1550nm) Tier 1 Optical Loss Test kit	\$9,718.00
2325/34	OLTS-85 Multimode (850/1300nm) Tier 1 Optical Loss Test kit	7,754.85
2325/35	OLTS-85 Quad (850/1300, 1310/1550nm) Tier 1 Optical Loss Test Kit	12,014.95
2326/35	OLTS-85P Quad (850/1300, 1310/1550nm) Tier 1 Optical Loss Test Kit with built in Patch Cord Microscope option	14,367.45

- All kits include Local and Remote test sets, carrying case (soft and hands free), and test reference cords for testing LC links and channels



2330/21



2326/35



FBP-SD101



FIBERCHEK PROBE



INX 760 PROBE



FFL-055



FBPT-SC



FBPT-SC-APC

P5000i FIBER MICROSCOPE

Automated Fiber Inspection & Analysis Probe provides PASS/FAIL capability to PC, laptops, mobile devices and Viavi test solutions. The P5000i makes it fast and easy to certify that every connection in your network is clear and optimized. This intelligent fiber microscope removes the guesswork from fiber inspection and provides reliable and objective PASS/FAIL analysis of the fibers that connect customers to your network and to the best user experience possible.

PART #	DESCRIPTION	PRICE
FBP-P5000i	P5000i USB Probe Microscope with 1 tip; FBPT-U25M patch cord tip allowing inspection of any 2.5mm PC connector.	\$1,591.35
FBP-SD101	P5000i USB Probe Microscope (4 tip kit); FBPT-U12M, FBPT-U25M, FBPT-LC and FBPT-SC, allowing inspection of any 2.5 or 1.25mm PC ferrule connector and SC-PC/LC-PC headends	1,698.45
FBP-MTS-101	P5000i USB Probe Microscope (7 tip kit); SC-PC, SC-APC and LC-PC tips allowing inspection of any 2.5 (PC and APC) or 1.25mm PC ferrule connector, FC-PC, SC-PC, SC-APC and LC-PC headends.	1,805.00

FIBERCHEK PROBE MICROSCOPE - FULLY AUTONOMOUS INSPECTION AND ANALYSIS

PART #	DESCRIPTION	PRICE
FIT-FC-KIT1	FiberChek Wireless Inspection Probe with Wi-Fi, soft case, universal 2.5mm patch cord tip, tip case, USB charging adapter and cable	\$3,603.95
FIT-FC-KIT2	FiberChek Wireless Inspection Probe (4 tip kit) with touchscreen display, Wi-Fi, BT, Auto-focus, Auto-center, Auto pass/fail analysis, Auto report generation, inspection tips FBPT-LC, FBPT-SC, FBPT-U12M, FBPT-U25M, tip case, USB charging adapter and cable. Allows inspection of any 2.5 or 1.25mm PC ferrule connector and SC-PC/LC-PC headends	\$3,713.15
FIT-FC-KIT3	FiberChek Wireless Inspection Probe (6 tip kit) with touchscreen display, Wi-Fi, BT, Auto-focus, Auto-center, Auto pass/fail analysis, Auto report generation, inspection tips FBPT-LC, FBPT-SC, FBPT-SC-APC, FBPT-U12M, FBPT-U25M, FBPT-U25MA, tip case, USB charging adapter and cable. Allows inspection of any 2.5 (PC and APC) or 1.25mm PC ferrule connector, SC-PC, SC-APC and LC-PC headends.	3,826.45
FIT-CATV-KIT2	FiberChek Wireless Inspection Probe (8 tip kit) with touchscreen display, Wi-Fi, BT, Auto-focus, Auto-center, Auto pass/fail analysis, Auto report generation, inspection tips for SC/UPC, SC/APC, LC/UPC, and LC/APC, Male (connector) and Female (headend), rechargeable battery w/ A/C adapter and USB to micro-USB cable, soft carry case.	4,804.95
FCPP-CHP2	Holster for FiberChek Microscope	115.50

INX 760 PROBE MICROSCOPE - AUTOMATED SINGLE AND MULTIFIBER INSPECTION & ANALYSIS

The INX 760 automates every step of the inspection process to deliver fast, reliable, and repeatable results without any hassles. With the ability to support simplex, duplex, and multi-fiber connector types, users simply attach the appropriate tip and inspect. The INX 760 microscope automates setup, image focus, camera panning, image analysis, and results storage; which can occur both on the device or to the VIAVI TPA ecosystem.

PART #	DESCRIPTION	PRICE
INX-760-KIT2	INX-760-KIT2; INX Microscope Auto Simplex Multi Wi-Fi 6 Tips-MPO LC SC	\$6,995.00
INX-760-KIT1	INX-760-KIT1; INX Microscope Auto Simplex Multi Wi-Fi 2 Tips-MPO	5,995.00

VISUAL FAULT LOCATOR

Whether installing or troubleshooting, the Visual Fault Locator (VFL) is an essential tool that quickly and easily locates problem areas in fiber cables. By pinpointing the exact location of fiber damage, technicians can diagnose, troubleshoot, and fix the problem efficiently. The VFL is also used for conducting continuity tests and performing fiber identification.

PART #	DESCRIPTION	PRICE
FFL-050	FFL-050; FFL-050 Pocket Visual Fault Locator 1mW - includes 1.25 mm adapter	\$190.55
FFL-055	FFL-055; FFL-055 Pocket Visual Fault Locator 5mW - includes 1.25 mm adapter	221.45
FFL-100	FFL-100; FFL-100 Rugged Visual Fault Locator 1mW - includes 1.25 mm adapter	319.25
FFL-105	FFL-105; FFL-105 Rugged Visual Fault Locator 5mW - includes 1.25 mm adapter	349.00

VIAVI PROBE ADAPTER TIPS

Adapter tips for FBP and FIT microscopes.

PART #	DESCRIPTION	PRICE
FBPT-U25M	Universal 2.5mm Patch Cord Tip. For 2.5mm PC patch cords, including FC, SC, and ST	\$88.50
FBPT-U25MA	Universal 2.5mm APC Patch Cord Tip. For 2.5mm APC patch cords, including FC, SC, and ST	98.80
FBPT-U12M	Universal 1.25mm Patch Cord Tip. For 1.25mm PC patch cords, including LC and MU	88.50
FBPT-U12MA-SF	Universal 1.25mm APC Patch Cord Tip. For 1.25mm APC patch cords, including LC and MU.	134.00
FBPT-SC	SC/PC Bulkhead Tip	61.35
FBPT-SC-APC	SC/APC Bulkhead Tip	123.75
FBPT-LC	LC/PC Bulkhead Tip	88.50
FBPT-LC-L	LC/PC Bulkhead Tip, Long Reach (4 cm)	369.25
FBPT-LC-APC	LC/PC and LC/APC Bulkhead Tip, Long Reach (4 cm)	556.40
FBPT-FC	FC/PC Bulkhead Tip	88.00
FBPT-FC-APC	FC/APC Bulkhead Tip	186.15
FBPT-ST	ST Bulkhead Tip	88.50
FBPT-E2000	E2000 Bulkhead Tip for PC and APC, 4 Degree Mechanical Offset	310.95
FBPT-COD-A6	FBPT-COD-A6; Tip OptiTap Single Fiber 60 Degree Angle for FBP	643.75
FBPT-CEV-A6	FBPT-CEV-A6; Tip Corning Evolv for FBP Angled 60 Degrees	962.00
FCPT-LC	FCPT-LC; Tip LC Bulkhead for Sidewinder	535.00

FIS IS THE NATION'S LARGEST ANRITSU OTDR STOCKING DISTRIBUTOR



ANRITSU ACCESS MASTER™ MT9085 SERIES

OTDR FEATURES

- 8-inch TFT 16:9 wide touch screen display for use indoors and outdoors
- Longer battery operation time: Up to 12 hrs
- Wider operating temperature range: -10 to 50°C
- Quickly change between trace and Fiber Visualizer summary
- Wi-Fi/Bluetooth connectivity
- Rotary knob and new short-cut function keys simplify and minimize operations and time to complete a test
- Fiber Visualizer software to simplify PASS/FAIL analysis and PDF reports directly from the OTDR

The ACCESS Master MT9085x is a handheld complete Fiber Optic Cable tester for performing all optical pulse tests, optical loss/power measurements and optical fiber end-face inspections. Ideal for FTTx, PON, Metro WDM. The MT9085 now features an 8-inch TFT 16:9 wide touch screen display for use indoors and outdoors while providing a rotary knob and new short-cut function keys that simplify and minimize operations and time to complete a test.

Each Unit Includes: 8 inch wide Touchscreen Display, Protector Option, Softcase & Connector. Deluxe kits also include PM/LS, and VFL. Specify the adapter when ordering.

MT9085A

PART #	DESCRIPTION	PRICE
MT9085A-053SM-BSC	Single Mode 1310/1550nm 39/37.5dB Basic Kit	\$9,898.00
MT9085A-063QM-BSC	Quad SM/MM 850/1300/1310/1550nm 29/28/39/37.5dB Basic Kit	15,186.00
MT9085A-053SM-DLX	Single Mode 1310/1550nm 39/37.5dB Deluxe Kit	11,551.00
MT9085A-063QM-DLX	Quad SM/MM 850/1300/1310/1550nm 29/28/39/37.5dB Deluxe Kit	16,839.00

MT9085B

MT9085B-053SM-BSC	Single Mode 1310/1550nm 42/41dB Basic Kit	\$11,219.00
MT9085B-063QM-BSC	Quad SM/MM 850/1300/1310/1550nm 29/28/42/41dB Basic Kit	16,507.00
MT9085B-053SM-DLX	Single Mode 1310/1550nm 42/41dB Deluxe Kit	12,872.00
MT9085B-063QM-DLX	Quad SM/MM 850/1300/1310/1550nm 29/28/42/41dB Deluxe Kit	18,160.00

MT9085C

MT9085C-053SM-BSC	Single Mode 1310/1550nm 46/46dB Basic Kit	\$14,524.00
MT9085C-053SM-DLX	Single Mode 1310/1550nm 46/46dB Deluxe Kit	16,177.00



Traditional OTDR graph



MT9090A OTDR

ANRITSU MT9090A WITH MU909014X/15X OTDR MODULE

The Network Master™ MT9090A OTDR may be small but don't let its size fool you. It features 2cm resolution, 1m dead zones and up to 38dB dynamic range. Two or three wavelength versions for both installation (1310/1550nm) and maintenance (filtered 1650 nm or 1625nm) are available to cover all your FTTx, RRH, DAS and general fiber testing needs. All MT9090A kits include mainframe, OTDR module with Fiber Visualizer software, battery, charger, soft case, rubber boot and connector adapter.

PART #	DESCRIPTION	PRICE
Z1489A	1310/1550nm (37/36dB) OTDR, VFL, Protector, Power Meter -5 to -50dB	\$8,148.00
Z1490A	1310/1550nm (32/31dB) OTDR, VFL, Protector, Power Meter -5 to -50dB	7,474.00
Z1490B	1310/1550+1650nm (38/37/35dB) OTDR, PON PM/LS with Protector	10,542.00
Z1490C	1310/1550+1650nm (32/31/32dB) OTDR, PON PM/LS with Protector	9,867.00

MT9090 ACCESSORIES

PART #	DESCRIPTION	PRICE
J0617B	Anritsu Replacement FC Adapter	\$146.00
J0618D	Anritsu Replacement ST Adapter	146.00
J0619B	Anritsu Replacement SC Adapter	146.00
J1534A	Anritsu SC/UPC-LC/UPC Adapter	184.00
G0306C	Anritsu Video Inspection Probe	2,321.00
B0600B	Hard Case for MT9090	465.00
G0203A	Replacement AC Adapter/Charger	128.00
G0202A	Replacement NiMH Battery Pack	138.00

PART #	DESCRIPTION	PRICE
G0382A	Auto focus 400x Video Inspection Probe with tips	\$4,862.00
J0617B	Replacement FC Adapter for MT1000 and MT9085	146.00
J0618D	Replacement ST Adapter for MT1000 and MT9085	146.00
J0619B	Replacement SC Adapter for MT1000 and MT9085	146.00

AVAILABLE AUTO FOCUS PROBE



IEC 61300-3-35
Connector Inspection

FEATURES

The G0382A comes with the following standard accessories.

- Soft Bag
- Seven Connector Tips

1.25mm PC Male	2.5mm PC Female(FC)
2.5mm PC Male	2.5mm PC Female(SC)
2.5mm APC Male	2.5mm APC Female(SC)
1.25mm PC Female(LC)	
- Quick Reference Guide

G0382A





AFL SINGLEMODE FLEXSCAN® FS200 OTDRS

The FlexScan FS200 is a family of performance-packed single-mode OTDRs that provide fast, accurate fiber characterization and fault location for point-to-point and FTTH PON networks.

FlexScan FS200 OTDRs automate test setup, simplify results interpretation, and shorten test time, all at an affordable price point. AFL's SmartAuto® mode requires just the push of a button to test a network. Results are displayed on the large touchscreen using color-coded LinkMap® icons that show network configuration and pass/fail status at a glance. It's Flexpress® mode completes dual-wavelength tests in under 5 seconds – 10 x faster than other OTDRs!

With optional connector inspection, integrated source, power meter and VFL, FlexScan OTDRs offer an all-in-one solution, ensuring technicians have everything they need to locate and resolve optical network issues. Uploaded results may be viewed and reports may be generated using the included Windows-compatible FlexReports Test Results Manager software.

FEATURES

- Fast! Flexpress mode completes dual-wavelength tests in <5 seconds – 10 x faster than conventional OTDRs! For multi-fiber testing, Flexpress mode automatically controls 12-fiber MPO Switch to further reduce multi-fiber test time.
- FlexScan FS200 has a built in MPO Switch control: MPO Kit: Includes selected FlexScan and accessories, MFS-12-SM Single-mode Multi-Fiber Switch, USB cable and 150 meter fiber ring to connect FlexScan to Switch, plus 61 meter MPO Launch Cable to connect Switch to MPO-terminated multi-fiber network.

FS200-100 KITS (1310/1550nm OTDR, OLS, OPM, VFL)

PART #	DESCRIPTION	PRICE
FS200-100-BAS-P1-W1	Basic Kit; FlexReports Basic and carry case (1310/1550nm OTDR, OLS, OPM, VFL) (32/30dB)	\$4,480.00
FS200-100-PLUS-P1-W1	Plus Kit; Adds 150 meter fiber ring plus FlexReports Advanced and One-Click Cleaner	5,095.00
FS200-100-PRO-P1-W1	PRO Kit; Adds FOCIS Flex, 150 meter fiber ring plus FlexReports Advanced and One-Click Cleaner	7,175.00
FS200-100-BIPM-P1-W1	Complete Kit; Adds OFI-BIPM, FOCIS Flex, 150 meter fiber ring plus FlexReports Advanced and One-Click Cleaner	8,845.00

FS200-300 KITS (1310/1550nm OTDR, OLS/OPM, VFL) / FS200-304 KITS (1310/1550/1650nm PON OTDR, OLS/OPM, VFL)

FS200-300/304 Kits are available with a variety of options. All kits include carry case, USB cable and FlexReports Test Results Management software (Basic or Advanced, depending on kit). Kits can also include Fiber Rings, OLS/OPM, OFI-BI/BIPM, FOCIS Flex connector inspection probe and tips.

Please contact your FIS Sales Associate for kit part numbers and pricing.

PART #	DESCRIPTION	PRICE
FS200-300-BAS-P1-W1	FS200-300 Basic Kit, 1310/1550nm OTDR, OLS/OPM, VFL, BT/Wi-Fi, FlexReports Basic (37/36dB)	\$5,380.00
FS200-300-PLUS-P1-W1	Adds 150 m SMF fiber ring, One-click cleaner and FlexReports Advanced to BASIC Kit	5,995.00
FS200-300-PRO-P1-W1	Adds FOCIS Flex and two adapter tips to PLUS Kit	8,075.00
FS200-300-BIPM-P1-W1	Adds OFI-BIPM to PRO Kit	9,745.00
FS200-300-MPO-P1-W1	Basic Kit plus MPO Switch, 150 meter SMF fiber ring, 61 meter 12-fiber MPO fiber ring, 2.5mm and MPO One-click cleaners and FlexReports Advanced	11,395.00
FS200-304-BAS-P1-W1	FS200-304 Basic Kit, 1310/1550/1650nm PON OTDR, OLS/OPM, VFL, BT/Wi-Fi, FlexReports Basic (37/36/37dB)	7,195.00
FS200-304-PLUS-P1-W1	Adds 150 m SMF fiber ring, One-click cleaner and FlexReports Advanced to BASIC Kit	7,795.00
FS200-304-PRO-P1-W1	Adds FOCIS Flex and two adapter tips to PLUS Kit	9,875.00
FS200-304-FTTH-PRO	Basic Kit plus 150 m SC/APC and LC/APC Fiber Rings, FOCIS Flex plus SC/APC & LC/APC bulkhead and ferrule adapters, SC & LC One-Click Cleaners, Port Saver, FlexReports Advanced, soft or hard carry case (FS200-303/304 only)	10,545.00
FS200-304-BIPM-P1-W1	Adds OFI-BIPM to PRO Kit	11,545.00
FS200-304-MPO-P1-W1	Basic Kit plus MPO Switch, 150 m SMF fiber ring, 30 m 12-fiber MPO fiber ring, 2.5 mm and MPO One-click cleaners and FlexReports Advanced	13,195.00

ACCESSORIES FOR FLEXSCAN OTDRS

PART #	DESCRIPTION	PRICE
2900-50-0003MR	SC adapter, OTDR/OLS port	\$60.00
2900-50-0004MR	ST adapter, OTDR/OLS port	60.00
2900-50-0006MR	LC adapter, OTDR/OLS port	94.00
2900-52-0002MR	SC adapter, OPM port	60.00
2900-52-0003MR	ST adapter, OPM port	60.00
2900-52-0004MR	LC adapter, OPM port	94.00
2900-52-0005MR	2.5 mm adapter, OPM port	56.00
2900-52-0006MR	1.25 mm adapter, OPM port	56.00
2900-53-0001MR	2.5 mm adapter, VFL port	56.00
2900-53-0002MR	1.25 mm adapter, VFL port	56.00
2900-58-0001MR	Single-mode Port Saver, OTDR SC/APC to network SC/APC	225.00
2900-58-0002MR	Single-mode Port Saver, OTDR SC/APC to network SC/UPC	225.00
2900-58-0003MR	Single-mode Port Saver, OTDR SC/UPC to network SC/APC	225.00
2900-58-0004MR	Single-mode Port Saver, OTDR SC/UPC to network SC/UPC	225.00

FLEXSCAN® FS300 QUAD OTDRS WITH SMARTAUTO® & LINKMAP®

Performance-packed: With SmartAuto multi-pulse acquisition, 37 dB dynamic range and best-in-class dead zones, FlexScan Quad OTDRs test multimode and single-mode networks – including FTTH PONs and POLANs up to 1:64 split ratio – while still detecting and measuring events <2 meters apart.

User-friendly: FlexScan OTDRs enable both expert and novice technicians to quickly, reliably and accurately detect, locate, identify and measure optical network components and faults. After applying industry-standard or user-set pass/fail criteria, the network is displayed using FlexScan's intuitive, icon-based LinkMap view. Results may be printed to PDF and stored internally or externally. FlexScan automates test setup, shortens test time and simplifies results interpretation, improving test efficiency and cost.

Pocket-sized: FlexScan OTDRs truly fit in your pocket, yet still deliver all-day battery operation plus a large, bright, indoor/outdoor, 5-inch 800x480 touchscreen display. With large touch controls, you'll never need a stylus.

All-in-one test capability: With optional connector inspection, integrated optical light source, power meter and VFL, FlexScan provides an all-in one solution, ensuring technicians have everything they need to locate and resolve optical network issues. Uploaded results may be viewed and professional reports may be generated using the included Windows-compatible FlexReports Test Results Manager software.



FS300

FEATURES

- Test MMF and SMF, point-to-point and PON
- SmartAuto detects closely spaced events without sacrificing range
- LinkMap icons clearly identify event type & pass/fail status
- Print-to-PDF plus internal & external data storage
- Best-in-class 20 m PON dead zone
- Integrated Source, Power Meter, Visual Fault Locator
- Bluetooth & Wi-Fi communications
- Tether-free connector inspection with FOCIS Flex
- Rugged, lightweight, handheld for field use

FS300 KITS (850/1300 MM; 1310/1550nm SM OTDR, WI-FI, BLUETOOTH)

PART #	DESCRIPTION	PRICE
FS300-325-BAS-P1-W1	Basic kit with soft case, FlexReports Basic, USB cable (37/36dB)	\$8,180.00
FS300-325-PLUS-P1-W1	PLUS kit adds 150 meter SMF & MMF fiber rings, One-Click cleaner, FlexReports Advanced	9,530.00

FS300 KITS (850/1300 MM; 1310/1550nm SM OTDR, OLS/OPM, WI-FI, BLUETOOTH)

FS300-325-BAS-P1-W1	Basic kit with soft case, FlexReports Basic, USB cable (29/29dB - 37/36dB)	\$8,695.00
FS300-325-PLUS-P1-W1	PLUS kit adds 150 meter SMF & MMF fiber rings, One-Click cleaner, FlexReports Advanced	9,530.00
FS300-325-PRO-P1-W1	PRO kit adds FOCIS Flex, 2 adapter tips, 150 meter SMF & MMF fiber rings, One-Click cleaner, FlexReports Advanced	11,610.00
FS300-325-BIPM-P1-W1	BIPM Complete kit adds OFI-BIPM fiber identifier with power meter, FOCIS Flex, 2 adapter tips, 150 meter SMF & MMF fiber rings, One-Click cleaner, FlexReports Advanced	13,280.00

FS300 MPO OTDR KITS (SINGLEMODE OR MULTIMODE)

PART #	DESCRIPTION	PRICE
FS300-325-SMPO	FS300, SMF MFS Multi-Fiber Switch, SMF 150 m fiber ring (SC/APC to SC/APC), SMF MPO launch cable (unpinned) to user-selected male (pinned) or female (unpinned) MPO connector, FlexReports Advanced, One-Click Cleaners (single-fiber and MPO), carry case that allows FlexScan, MFS Switch, and fiber rings to be connected, operated in the carry case and remain configured during transport	\$14,995.00
FS300-325-MMPO	Includes: FS300, MMF MFS Multi-Fiber Switch, OM3/4/5-compatible 150 m fiber ring (SC to SC), MMF MPO launch cable (unpinned) to user-selected male (pinned) or female (unpinned) MPO connector, FlexReports Advanced, One-Clicks (single fiber and MPO), carry case that allows FlexScan, MFS Switch, and fiber rings to be connected, operated in the carry case and remain configured during transport	14,995.00

FLEXSCAN® TS100 FTTH PON TROUBLESHOOTER

AFL's FlexScan TS100 Optical Troubleshooter is an easy-to-use, all-in-one tool for detecting, identifying, locating, and resolving single-mode optical network issues. The TS100 has auto-configured settings to quickly measure received power, link length, loss, and ORL with the push of a button. The results are displayed using color-coded LinkMap® icons for easy analysis. The FlexScan TS100 automates testing, shortens test time, interprets results, and recommends corrective actions, improving efficiency of frontline technicians and reducing costs.

PART #	DESCRIPTION	PRICE
TS100-60-BAS-P2	Basic Kit Includes: TS100, soft case, FlexReports Basic, USB cabl, 1650nm PON, Test to Splitter, PON Power Meter and Wi-Fi Enabled	\$4,295.00
TS100-60-PLUS-P2	Plus Kit Includes: BAS kit plus 150 meter Fiber Ring, One-Click Cleaner, FlexReports Advanced, Test to Splitter, PON Power Meter and Wi-Fi Enabled	4,895.00
TS100-60-PRO-P2	Pro Kit Includes: PLUS kit plus FOCIS Flex with 2 adapter tips, Test to Splitter, PON Power Meter and WIFI Enabled	6,985.00
TS100-70-BAS-P2	Basic Kit Includes: TS100, soft case, FlexReports Basic, USB cable a 1650nm Extended PON, Test through Splitter, PON Power Meter and Wi-Fi Enabled	4,795.00
TS100-70-PLUS-P2	Plus Kit Includes: BAS kit plus 150 meter Fiber Ring, One-Click Cleaner, FlexReports Advanced, Test through Splitter, PON Power Meter and Wi-Fi Enabled	5,395.00
TS100-70-PRO-P2	Pro Kit Includes: PLUS kit plus FOCIS Flex with 2 adapter tips, Test through Splitter, PON Power Meter and Wi-Fi Enabled	7,485.00



TS100 FTTH PON Troubleshooter



TS100 PLUS KIT

TS100 PRO KIT



OFP2-100-M



FI-3000



FI-500



MFTK1200

OPTIFIBER® PRO SERIES OTDR

Fluke Networks' OptiFiber® Pro Series OTDRs make novices and experts faster. Automated trace analysis and setup supports applications including data centers, PON and outside plant. Advanced features include Manual Expert mode, pinch and zoom for in-depth trace analysis and SmartLoop for bi-directional testing. Supports Versiv copper and fiber loss certification modules.

FEATURES

- Effectively test data center fiber with the least set-up and trace time
- Reduce network downtime by quickly and precisely identifying faults on singlemode or multimode fiber
- Accelerate fiber certification with trace times as short as two seconds in Quick Test mode

PART #	DESCRIPTION	PRICE
OFP2-100-M	OptiFiber Pro Multimode OTDR kit (850/1300nm) (28/30dB)	\$10,060.00
OFP2-100-MI	OptiFiber Pro Multimode OTDR kit with inspection kit	13,578.00
OFP2-100-Q	OptiFiber Pro Quad OTDR kit (850/1300/1310/1550nm) (28/30/32/30dB)	15,007.00
OFP2-100-S	OptiFiber Pro Singlemode OTDR kit (1310/1550nm)(32/30dB)	11,249.00
OFP2-100-SI	OptiFiber HDR OTDR w/Inspection Kit & Wi-Fi (1310/1550nm)(42/41dB)	15,034.00
OFP-SM	OptiFiber Pro Singlemode OTDR Module (1310/1550nm)(32/30dB)	8,756.00
OFP-QUAD	OptiFiber Pro Quad OTDR Module (850/1300/1310/1550nm) (28/30/32/30dB)	12,086.00

CERTIFIBER® PRO OLTS

The CertiFiber® Pro Optical Loss Test Set (OLTS) helps cabling professionals accomplish more than ever. It's all about accurate, error-free certification, making jobs easier to manage and certifying fiber optic cabling to industry standards, faster. CertiFiber Pro OLTS complies with all applicable cabling standards, which call out Encircled Flux launch condition requirements for optical sources.

FEATURES

- Versiv enables users to accomplish more than ever with a cable tester, accelerating every step of the testing process
- Taptive user interface puts advanced data analysis, easy set-up and operation at the fingertips of technicians

PART #	DESCRIPTION	PRICE
CFP2-100-M	CertiFiber Pro Multimode OLTS V2, w/Wi-Fi	\$10,225.00
CFP2-100-Q	CertiFiber Pro Quad OLTS V2, w/Wi-Fi	16,111.00
CFP2-100-S	CertiFiber Pro Singlemode OLTS V2, w/Wi-Fi	11,700.00
CFP2-100-QI	CertiFiber Pro Quad OLTS V2, w/Double Ended Inspection & Wi-Fi	20,791.00
CFP-MM-ADD	CertiFiber Pro MM Modules Add On Kit	6,872.00
CFP-SM-ADD	CertiFiber Pro SM Modules Add On Kit	8,450.00
CFP-Q-ADD	CertiFiber Pro Quad Add On Kit	12,757.00

FIBERINSPECTOR™ ULTRA CAMERA

The FI-3000 FiberInspector Ultra offers an extensive feature set that makes testing MPO fiber trunks, cassettes, array cables easy and efficient. The multiple camera design provides an instant Live View with simple touchscreen gestures to move from full trunk to individual endfaces in real time. Touch "TEST", and in seconds, you'll get an automated PASS/FAIL result compliant with IEC 61300-3-35. Store results on your phone and share them through text messages, email or use the industry-leading LinkWare platform to store complete project reports including copper, fiber loss, OTDR, and endface images. Compact, ergonomic design with autofocus makes it comfortable and fast even when you're testing hundreds of cables or ports.

FEATURES

- Integrates with Versiv™ Cabling Certification System and LinkWare™ Reporting Software for simple operation and documentation or with mobile phones for testing and sharing
- Optional automated pass/fail results in seconds
- Multiple Autofocus/Autocentering Camera design for real time imaging
- Rugged, ergonomic design with convenient holster

PART #	DESCRIPTION	PRICE
FI-3000	FiberInspector™ Ultra Camera USB & Wi-Fi Single fiber / MPO Probe with tips set	\$5,747.00
FI-500	FiberInspector™ Micro Camera, Single Fiber Only	2,792.00

MULTIFIBER™ PRO OPTICAL POWER METER AND TEST KITS (MPO)

Introducing the MultiFiber™ Pro Optical Power Meter and Fiber Test Kits. MultiFiber Pro is the only fiber tester that tests MPO fiber trunks without the use of fan-out cords, eliminates the complexity of polarity issues and makes cassette testing in the field much easier.

FEATURES

- Automatic scanning and testing of all fibers in MPO connectors
- Ensures correct end-to-end connectivity of MPO connectors with built-in polarity verification
- On-board MPO connector so no fan-out cords are required when testing fiber trunks
- Easy to interpret test results with a simple user interface that displays all 12 fibers

PART #	DESCRIPTION	PRICE
MFTK1200	MPO Testing Base Kit includes: MultiFiber Pro Power Meter, 850 Light Source, Test Cords, MPO adapters and carrying case	\$14,535.00
MFTK-MM850-SM1310	MULTIFIBER Pro Kit with 850/1310 nm PMLS	25,961.00
MFTK-SM1310-SM1550	MULTIFIBER Pro Kit with 1310/1550 nm PMLS	30,227.00

BUILD YOUR CUSTOM FIBER LAUNCH/PULSE OR TEST BOX

Use this chart to build the launch box you need to your exact specifications.



BOX PURPOSE	STYLE	FIBER TYPE (CORE/CLAD)	FIBER LENGTH (IN METERS)	INTERFACE	CONNECTORS SIDE A - SIDE B
PS	7	3	2000	P	YU-YA
PS= Fiber Launch Box TB= Test Box TK= Launch/Receive Kit Test box includes 1 or more events, must specify distance between events	1= #1 4= #4 5= #5 7= #7	1= 50/125µm - OM2 2= 62.5/125µm - OM1 3= 9/125µm - OS2 8= BI 10G 50/125µm - OM3 10= BI 10G 50/125µm - OM4 12= 50µm10Gig - OM5		P= Pigtails - 1mtr R= Ruggedized Pigtails - 1mtr	7U= FC/UPC MU= MU/UPC 7A= FC/APC YU= SC/UPC 8 = ST/PC YA= SC/APC LU= LC/UPC O= Other LA= LC/APC MT= MTP w/pins

Part # Example: PS-7-3-2000-P-YU-YA

Translates to: Fiber Launch Box (Style 7) in a 8"x 6"x 4" box with 2000 meters of Singlemode 9/125µm fiber with (1) SC/UPC, (1) SC/APC Pigtail Interface and Connector SC/UPC-SC/APC



STYLE #1
Dimensions: 5" Diameter
Fiber Capacity: 150 mtrs
(Pulse suppressor only)



LAUNCH KIT - STYLE #5
Dimensions: 9" x 5" x 1.75"
Fiber Capacity: 250 mtr
*For kit components see below



STYLE #7
Dimensions: 8" x 6" x 4"
Fiber Capacity: 2200 mtr
Test Box: 1 Event - 750 mtr, 2 Events - 600 mtr, 3 Events - 400 mtr



STYLE #4
Dimensions: 14.2" x 11.4" x 6.5"
Fiber Capacity: 5,000 mtrs
Test Box: 1 Event - 5,000 mtrs, 2 Events - 4,500 mtrs, 3 Events - 4,000 mtrs

FIS LAUNCH BOX PART NUMBER/PRICE EXAMPLES

PART #	DESCRIPTION	PRICE
PS-1-3-100-P-YU-YU	Launch Disc, Style #1, 100mtr Singlemode, SMF28 Ultra, 1.5mtr Pigtails, SC/UPC Connectors Both Ends	\$120.00
PS-1-2-100-P-8U-YU	Launch Disc, Style #1, 100mtr Multimode OM1, Infinicor300, 1.5mtr Pigtails, ST/UPC - SC/UPC	185.00
PS-1-3-150-P-YA-YU	Launch Disc, Style #1, 150mtr Singlemode, SMF28 Ultra, 1.5mtr Pigtails, SC/APC - SC/UPC Connectors	148.00
PS-1-8-100-P-8U-YU	Launch Disc, Style #1, 100mtr Multimode OM3, 50um/125um, 1.5mtr Pigtails, ST/UPC - SC/UPC	185.00
PS-7-3-500-P-YUYA	Launch Fiber Box, Style 7, 500mtr, Singlemode, SMF28Ultra, 1.5mtr Pigtails, SCAPC-SCUPC	260.00
PS-7-3-500-P-YAYA	Launch Fiber Box, Style 7, 500mtr, Singlemode, SMF28Ultra, 1.5mtr Pigtails, SCAPC-SCAPC	260.00
PS-7-3-500-P-YALU	Launch Fiber Box, Style 7, 500mtr, Singlemode, SMF28Ultra, 1.5mtr Pigtails, SCAPC-LCUPC	260.00

For Test Box*When ordering Test Boxes, please specify type and location of up to 3 events. Each additional event cost \$30.00. Call for Pricing of Test Box.

FIS OTDR FIBER OPTIC LAUNCH KIT*

This convenient test kit stores the essentials for technician. **Kit Includes:** 2.5mm connector endface cleaner, 1.25mm connector endface cleaner, cleaning solvent pen, cleaning reference card, fiber launch cartridge with armored pigtails, compact nylon soft case (9" x 5" x 1.75") with carabiner clip.

PART #	DESCRIPTION	PRICE
LK59100PYALU	FIS OTDR Fiber Launch Kit includes 100 meter SM Fiber SC/APC-LC/UPC	\$295.00
LK59100PYULU	FIS OTDR Fiber Launch Kit includes 100 meter SM Fiber SC/UPC-LC/UPC	295.00
LK59100PYAYA	FIS OTDR Fiber Launch Kit includes 100 meter SM Fiber SC/APC-SC/APC	295.00
LK59100PYUYU	FIS OTDR Fiber Launch Kit includes 100 meter SM Fiber SC/UPC-SC/UPC	295.00
LK5950PYALU	FIS OTDR Fiber Launch Kit includes 50 meter SM Fiber SC/APC-LC/UPC	295.00
LK5950PYULU	FIS OTDR Fiber Launch Kit includes 50 meter SM Fiber SC/UPC-LC/UPC	295.00

*Other Connector Styles, Fiber Types, Fiber Lengths And Accessories Available In Test Kits - Contact FIS Sales Representative For Designated Part Number And Pricing

FIS MPO 100 METER LAUNCH BOX

Made with ribbon fiber - This allows you to OTDR test MPO cables. Plug MPO cable into provided MPO adapter port. Use standard launch reel from OTDR to plug into one of the twelve provided standard connector adapters. Configuration with SC available contact a FIS Sales Representative.

PART #	DESCRIPTION	PRICE
PS48100BMT/LC	Launch Box Style #4, 100m, Multimode OM3, MPO Male to LC/UPC	\$675.00
PS49100BMT/LC	Launch Box Style #4, 100m, Singlemode, SMF28 Ultra, MPO Male to LC/UPC	675.00

FIS PORTABLE LAUNCH/TEST BOX

The portable launch/test case accepts up to 4 modules which can be configured to be a launch fiber up to 250 meters each or test modules with specified events to use in a classroom setting for training with an OTDR. Modules available in LC-LC, ST-ST, SC-SC and FC-FC connectors. Contact FIS sales representative for available custom configurations with mated pairs, fusion splices or attenuated events preinstalled.

PART #	DESCRIPTION	PRICE
F1TM	Portable Launch - Test OTDR Case, holds up to (4) TM series module (unloaded)	\$385.00
F1TMLC2509	Module LC-LC 250 meters Singlemode fiber	160.00
F1TMLC2508	Module LC-LC 250 meters OM3 Multimode fiber	170.00
F1TMLCSPL9	Module LC-LC 100 meters with nonreflective event - Fusion Splice	130.00



F1TM (shown loaded)


DID YOU KNOW... FIBER IDENTIFIERS



A Fiber Identifier allows you to see if a fiber is active without having to disconnect it from the network. They accomplish this by clamping onto a fiber mid-span and inducing a small macro bend. The Fiber Identifier can detect the small amount of light leaking through the macro bend to determine activity. Most units can also determine the direction of the traffic over the fiber link. Fiber Identifiers can also detect and identify specific modulated frequencies.

Fiber Identifiers are typically designed to work with 250µm coated, 900µm buffer, 2mm jacket and 3mm jacketed fibers. Ribbon Fiber versions are also available. Several higher end models are also capable of measuring the strength of the optical signal traveling down the fiber and displaying it on the unit.

TYPICAL APPLICATION

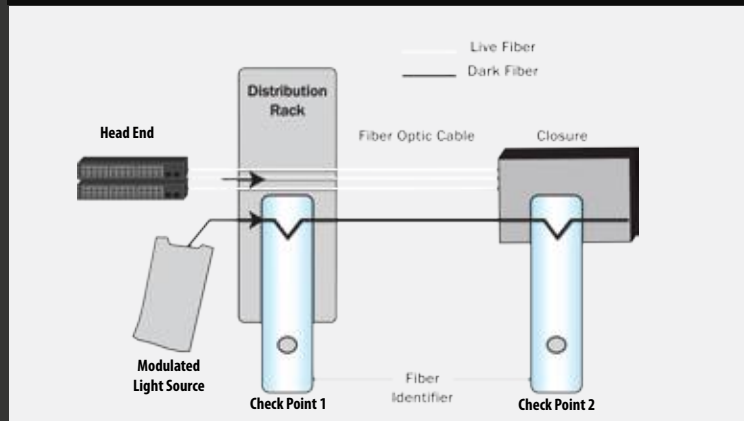

EXFO LIVE FIBER IDENTIFIER AND TONE GENERATOR

The EXFO Fiber Finder can identify traffic, direction and tone detection on both active and dark fibers. With less than 1dB of induced loss, a live fiber can quickly be located and the power measured while minimizing network access time and the possibility for errors. The TG-300 is a non-intrusive, non-disruptive tone generator. Because of the low 0.2dB typical loss, they can be used on live fibers. The Fiber Finder and Toner work on all wavelengths and fiber types. One headpiece works on 900µm, 1.6mm and 3mm jackets and tones of 270Hz, 1kHz and 2kHz. The TK-FFGP10071A kit includes both the Fiber Finder and Toner along with a case, AC adapter and 4 AA batteries per unit.

PART #	DESCRIPTION	PRICE
LFD-300B	Live Fiber Identifier	\$3,380.00
TG-300B	EXFO Fiber Tone Generator	4,060.00
TK-FFGP10071A	Fiber Identifier Kit – LFD-300 plus TG-300	6,765.00
LFD-202	Live fiber detector, traffic direction and tone detection w/ power, range of 0 to -40 dBm	1,975.00
LFD-202E	Live fiber detector, traffic direction and tone detection w/ power, range of +23 to -50 dBm	2,490.00



VIAMI FI-60 LIVE FIBER IDENTIFIER

Live Fiber Identifier easily identifies the optical signal without having to disconnect the fiber or disrupt network traffic. Also converts to an Optical Power Meter (OPM).

The Viavi FI-60 LFI enables users to easily detect the optical signal without disconnecting fiber or disrupting network traffic. The FI-60 LFI also includes the unique Viavi SafeChek™ system, which ensures safe and repeatable engagement with most fiber types without the hassle of changing out costly dies. The FI-60 also converts to an Optical Power Meter (OPM), providing twice the value for your investment and reducing the number of tools carried on the job.

FEATURES

- Avoid network downtime and damage with repeatable SafeChek™ easy-pull trigger system.
- Get the job done faster with a single LFI head that is compatible with multiple cable diameters (250µm to 3mm jacketed fibers).
- Have twice the tool at half the price! The FI-60 LFI easily converts to a full-function OPM that stores, recalls, and exports results to a PC via USB.

Each Unit Includes: Live Fiber Identifier with removable LFI attachment, 2.5 mm and 1.25mm OPM connector interfaces; USB cable; software; carrying case.

PART #	DESCRIPTION	PRICE
FI-60	Live Fiber Identifier with removable LFI attachment, 2.5 mm and 1.25mm OPM connector interfaces, USB cable, software, carrying case	\$921.85



FITEL FIBER IDENTIFIER

When you are doing maintenance on a network that can't be shut down for testing, reach for the Fitel Fiber Identifier. This device places a macro bend in the fiber that enables you to identify transmission direction, fiber path and relative core power on live optical fibers. A universal fiber optic adapter head accepts coated, ribbon or jacketed fiber optic cables. LED display and audible tone indicator.

Each Unit Includes: Battery, Strap and Manual

PART #	DESCRIPTION	PRICE
F1-IDH	Fitel Lightfinder ID-H Fiber Identifier with Universal Head	\$1,320.00

WILCOM FIBER IDENTIFIER

Wilcom's Optical Fiber Identifiers are rugged metal units with the best sensitivity detection on the market today. They operate by inducing a macrobend on the fiber, and can be used for singlemode and multimode applications. Certain Wilcom models allow Relative Core Power measurements to be displayed. The unit can also detect the presence of 2kHz, 1kHz or 270Hz modulated tones. The optical head accepts a 3mm, 250µm /Ribbon or 900µm fibers.

Each Unit Includes: 9V Alkaline Battery, Carry Case and Interchangeable Heads for 3mm, 900µm, 250µm Fibers.

PART #	DESCRIPTION	PRICE
F6121A	Fiber Identifier	\$1,280.00
F6222	Fiber Identifier with Core Power and Digital Display	1,600.00
F6222C	CATV Fiber Identifier	1,590.00
F6121R	Ribbon Fiber Identifier	1,862.00
044-197731	3mm Adapter Head	65.00
044-1996501	2mm Adapter Head	65.00
044-20715011	1.6mm Adapter Head	65.00

AFL OFI-BIPMe OPTICAL FIBER IDENTIFIERS

AFL's OFI-BIPMe optical fiber identifier is an easy-to-use tool that determines if a fiber is live, the transmission direction, and the relative core power. Its best-in-breed sensitivity makes it the only OFI that works on standard and bend-insensitive single-mode and multimode fibers and in a bright sunlight. It's positive stop plunger mechanism provides the right pressure to ensure proper detection while keeping loss to a minimum. The design ensures traffic will not be interrupted and fibers will not be damaged.

The OFI-BIPMe fiber identifier eliminates the need to access the optical fiber at a connection or splice point eliminating the possibility of interrupting service to a valued customer. It provides an integrated optical power meter for verification of power levels during installation or troubleshooting activities. The universal head of this OFI eliminates the need to change adapter heads for jacketed, coated or ribbon fibers, making them extremely easy to use in the field. The touchscreen features provide simple to follow setup and clear to read results. The OFI-BIPMe Optical Fiber Identifier is warranted against defective material and workmanship for a period of one year from the date of delivery to the end user.

FEATURES

- World class signal detection sensitivity
- Trigger lock, positive stop for optimum detection
- Integrated optical power meter option
- Works on bend-insensitive fibers

APPLICATIONS

- Maintenance of fiber optic networks
- Troubleshooting network issues
- Identification of live fibers or trace fibers
- Power level verification

Each Unit Includes: 9V Alkaline Battery, Carry Case and Fiber Identifier.

PART #	DESCRIPTION	PRICE
OFI-BIPME	BI Optical Fiber Identifier with integrated Optical Power Meter. The kit includes one 2.5 mm Universal Power Meter Port Adapter, BIPM-00-25.	\$1,795.00

OPTIONAL OFI-BIPM / BIPMe ADAPTERS (ORDERED SEPARATELY)

PART #	DESCRIPTION	PRICE
BIPM-00-25	OFI-BIPM / BIPMe 2.5 mm Universal Power Meter Port Adapter (works with both Optical Fiber Identifiers)	\$165.00
BIPM-00-SC	OFI-BIPM / BIPMe SC Power Meter Port Adapter (works with both Optical Fiber Identifiers)	165.00
BIPM-00-FC	OFI-BIPM / BIPMe FC Power Meter Port Adapter (works with both Optical Fiber Identifiers)	165.00
BIPM-00-ST	OFI-BIPM / BIPMe ST Power Meter Port Adapter (works with both Optical Fiber Identifiers)	165.00
BIPM-00-LC	OFI-BIPM / BIPMe LC Power Meter Port Adapter (works with both Optical Fiber Identifiers)	165.00

AFL OPTICAL FIBER IDENTIFIER

The AFL OFI 200D Optical Fiber Identifier is a low-cost, high-tech approach to non-invasive fiber optic signal detection. Using a low-insertion loss, macrobend-detection technique, it discriminates signals without disrupting service or overstressing fiber. By simply clamping an Optical Fiber Identifier onto a gently bent fiber, the unit will indicate if there is [No Signal], [Tone], or [Traffic] and identify signal direction. This is all done with no head swapping or adjustments for different types of fiber, 250µm, 900µm, 3mm jacketed cable and ribbon fiber.

PART #	DESCRIPTION	PRICE
OFI200D	Optical Fiber Identifier	\$950.00
OFI400	Optical Fiber Identifier for use with 250µm, 900µm, Ribbon, 2mm and 3mm Jacketed Optical Fibers	1,289.00

FLUKE FIBERLERT™ LIVE FIBER DETECTOR

Quickly check fiber activity, polarity, and connectivity. No setup or interpretation required –just place in front of the fiber end face or port and a light and tone indicate an active fiber. This pocket-sized tool tests single-mode, multimode UPC and APC patch cords and ports using a “non-contact” / non-contaminating detector.

FEATURES

- Detects optical power in single-mode and multimode fiber wavelengths (near infrared range 850 to 1625 nm)
- No setup or interpretation needed –light and sound indicate presence of optical signal
- “Non-contact” detector reduces the risk of contamination and damage; suitable for ports and patch cords, SM, MM, UPC and APC connections
- LightBeat™ flashes to indicate operation and battery status; powers off after five minutes to preserve battery (2xAAA, included)

PART #	DESCRIPTION	PRICE
FIBERLERT-125	FiberLert, 850 NM TO 1625 NM LIVE FIBER DETECTOR (INCLUDED 2 AAA Alkaline batteries)	\$136.00





F1-1315USK



Custom Kit Configurations Always Available! Please Call Today!



Reference Cords & Mating Sleeves Now Included



F1-1315LR



AC Adapter Available



F1-8513HR



Ruggedized Version Available

AC Adapter Available



9052-0000



Ruggedized Version Available

FIS SINGLEMODE LOSS TEST KIT

Our fiber optic test kit, proudly manufactured in Upstate NY, includes a power meter calibrated for six wavelengths and a unique duplex LC/UPC optical light source. The fixed duplex LC port allows independent operation of 1310 & 1550nm wavelengths. With a 2kHz tone modulation for fiber identification, the kit comes complete with a connector ferrule cleaner and necessary accessories for dB loss testing. **Kit Contents:** FIS Power Meter, FIS Dual SM Light Source (1310/1550), FIS Connector Cleaner, Patch cords (2 each - LC, SC, and ST, Mating Sleeves (2 each - LC, SC and ST), Soft Carry Case and User Manual.

- Power Meter is calibrated for: 850/1300/1310/1490/1550/1625nm
- Power Meter comes with SC, ST, FC & LC switchable adapters
- Light Source operated at 1310 & 1550nm
- Light Source has fixed LC duplex port w/shutter & soft protector case

PART #	DESCRIPTION	PRICE
F1-1315USK	FIS Loss Test Kit: Power Meter, 1310/1550 Light Source	\$495.00
F1-1315USKCATV	FIS Loss Test Kit with CATV Power Meter	495.00

FIS POWER METER AND LIGHT SOURCE KIT

Get our handheld power meter and light source kit, available in Singlemode, Multimode, or Quad versions. The kit includes a carrying case, reference cords, mating sleeves for SC, ST, and LC cables, manuals, and batteries. Power Meters come with universal adapter caps, with additional adapters available for purchase.

PART #	DESCRIPTION	PRICE
F1-813LR	Hand Held PM (0.01dB Resolution) 850/1300nm Dual LED LS (ST Interface)	\$775.00
F1-1315LR	Hand Held PM (0.01dB Resolution) 1310/1550nm Dual Laser LS (FC Interface)	800.00
F1-1835LR	Hand Held PM (0.01 Res), 850/1300nm and 1310/1550nm Light Sources (FC/SM, ST/MM Interface)	1,345.00
F1-1835LRVFL	Hand Held PM (0.01 Res), 850/1300nm and 1310/1550nm Light Sources and VFL	1,375.00
F1-1345LR	Hand Held PM (0.01 Res) 1310nm, 1490nm, 1550nm Laser Light Source (FC Interface)	1,375.00

FIS POWER METER

A power meter is the essential tool for measuring optical power within a fiber optic link. The FIS Power Meter is a solid performer, with 0.01dB resolution. Standard FIS units test from +5dBm to -65dBm, and FIS CATV units test from +23dBm to -45dBm. **Each Unit Includes:** Operating Manual, 9V Battery, 2.5mm and 1.25mm Adapters, and Carry Case.

PART #	DESCRIPTION	PRICE
F1-8513HR	Hand Held Power Meter with 0.01dB Resolution	\$425.00
F1-8513HRCATV	CATV Hand Held Power Meter with 0.01dB Resolution	425.00
F1-8513HR-4	Power Meter with 1310/1490/1550nm with 0.01dB Resolution	450.00
F1-8513HRCATV-4	CATV 0.01dB Resolution Power Meter with 1310/1490/1550nm	450.00
9080-0000	Ruggedized Power Meter with 2.5mm and 1.25mm Universal Adapter	895.00
F1-813RG	Ruggedized PM (0.01 Res) 850/1300nm LED Light Source (ST Interface)	1,250.00
F1-1315RG	Ruggedized PM (0.01 Res) 1310/1550nm Laser Light Source (FC Interface)	1,615.00
F1-8513UM	2.5mm Universal Adapter (ST, FC, SC) (Polymer)	39.00
F1-8513SC	SC Adapter	49.00
F1-8513ST	ST Adapter	49.00
F1-8513FC	FC Adapter	49.00
F1-8513LCMUM	1.25mm Universal Adapter (Polymer)	39.00
F1-9103U	Universal 110/220v AC Power Supply Adapter	35.00

FIS LIGHT SOURCE

The FIS Light Source is the perfect match for the FIS Power Meter. Singlemode units are equipped with lasers having a typical output power of -1.0dBm. Multimode units have VCSELs with a minimum output of -1.0 dBm min (62.5/125um Fiber). **Each Unit Includes:** Operating Manual, 9V Battery and Carry Case.

PART #	DESCRIPTION	PRICE
9052-0000	Dual 850/1300nm VCSEL Light Source with ST Adapter	\$375.00
9055-0000	Dual 1310/1550nm Laser Source with FC Adapter	375.00
9056-0000	Dual 1490/1550nm Laser Source with FC Adapter	575.00
9058-0000	Dual 1300nm VCSEL/1310nm Laser Source (ST and FC)	375.00
9056-1625	Dual 1490/1625 Laser Source	975.00
F1-9103U	Universal 110/220v AC Power Supply Adapter	35.00
9086-0000	Ruggedized Light Source 850/1300nm with ST Adapter	545.00
9087-0000	Ruggedized Light Source 1310/1550nm with FC Adapter	630.00
9088-0000	Ruggedized Light Source 1490/1550nm with FC Adapter	1,015.00
1136-0000	SC Interchangeable adapter for FIS light source	49.00
1137-0000	FC Interchangeable adapter for FIS light source	49.00
1138-0000	ST Interchangeable adapter for FIS light source	49.00

FIS E-SERIES POWER METER AND LIGHT SOURCE KIT

The new FIS E-Series Power Meter and Light Sources are also available in kits. These kits come in either Singlemode, Multimode or Quad versions with carrying case and mating sleeves needed for testing SC, ST and LC terminated cables. Reference cords include (2) of each: SC/SC, SC/LC and SC/ST. Multimode and Quad Kits include OM1 and OM3 reference cords with 62.5µm and 50µm mandrels.

PART #	DESCRIPTION	PRICE
F1-8513KIT	Multimode Kit (Power Meter with 0.01dB Resolution and Multimode Light Source, Dual 850/1300nm)	\$550.00
F1-1315KIT	Singlemode Kit (Power Meter with 0.01dB Resolution and Singlemode Light Source, Dual 1310/1550nm)	550.00
F1-ESQUADKITQ	SM/MM Kit (Power Meter, Quad Light Source 850/1300nm/1310nm/1550nm) NEW Compact 2-Piece Kit	750.00
F1-8513KITDS	Multimode Kit (Data Save Power Meter with 0.01dB Resolution and Multimode Light Source, Dual 850/1300nm)	595.00
F1-1315KITDS	Singlemode Kit (Data Save Power Meter with 0.01dB Resolution and Singlemode Light Source, Dual 1310/1550nm)	595.00
F1-ESQUADKITDSQ	SM/MM Kit (Data Save Power Meter, Quad Light Source 850/1300nm/1310nm/1550nm) NEW Compact 2-Piece Kit	795.00



FIS E-SERIES FAMILY OF PRODUCTS

The FIS E-Series Family of Products provide an industry leading value for handheld test gear. With a new design for ease of use, LED backlight and referencing, technicians will have no problem testing and trouble shooting fiber optic links. Data Save version includes PC reporting software.

FEATURES

- Light Sources (minimum output -7dBm)
- Continuous Wave (CW), 270Hz, 1kHz, or 2kHz Modulation
- Auto Shut Off and Low Battery Indicator
- Calibrated Wavelengths for Power Meter (850nm, 1300nm, 1310nm, 1490nm, 1550nm and 1625nm)
- Standard Range -70dBm to +6dBm Power Range
- CATV Range -45dBm to +23dBm)
- 60-Hour Typical Battery Life for Light Source
- 200-Hour Typical Battery Life for Power Meter
- Absolute Power Reference Display

Each Unit Includes: Operating Manual, (3) AA Batteries, interchangeable SC, FC, ST adapters; LC adapter for PM only and Carry Case.

PART #	POWER METERS - DESCRIPTION	PRICE
F1-8513PM	Power Meter with 0.01dB Resolution	\$185.00
F1-8513PMVF	Power Meter with VFL and 0.01dB Resolution	295.00
F1-8513PMDATA	Power Meter with Data Storage (1,000 Files) and 0.01dB Resolution	295.00
F1-8513PMCATV	CATV Power Meter with 0.01dB Resolution	185.00

PART #	LIGHT SOURCES - DESCRIPTION	PRICE
F1-8513LS	Multimode Light Source, Dual 850/1300nm	\$295.00
F1-1315LS	Singlemode Light Source, Dual 1310/1550nm	295.00
F1-QUADLS	FIS SM/MM Source, 850/1300/1310/1550	495.00

PART #	RANGE FINDER - DESCRIPTION	PRICE
F1-FR15A	FIS Fiber Ranger (Fault Finder/Distance Verifier) - APC with VFL	\$795.00
F1-FR15U	FIS Fiber Ranger (Fault Finder/Distance Verifier) - UPC with VFL	795.00

PART #	TRI-WAVE SOURCES - DESCRIPTION	PRICE
F11314LSU	E-Series Triwave Source 1310/1490/1550 (UPC)	\$525.00
F11314LSA	E-Series Triwave Source 1310/1490/1550 (APC)	525.00
F11316LSU	E-Series Triwave Source 1310/1550/1625 (UPC)	695.00
F11316LSA	E-Series Triwave Source 1310/1550/1625 (APC)	695.00

FIS FIBER OPTIC TALK SET

The FIS Fiber Optic Talk Set units are designed for transmitting voice in both directions on a single fiber using two different wavelengths. Works with SM or MM fiber. Units include adjustments for power and sensitivity. The Talk Set comes standard with SC and FC interchangeable adapter ports. These sets have a range up to 80km. Finally, each Talk Set comes equipped with a stereo headset with boom microphone, providing comfort for long-term use and high performance.

Talk Set includes: (2) Units, (2) Headphones with Microphone, (6) AA Batteries

PART #	DESCRIPTION	PRICE
F1-9062TKS	FIS Singlemode/Multimode Talk Set (pair) w/ FC and SC Adapters	\$1,095.00 (pair)





**NEW
ENHANCED
MODEL**

NEW



**Coming
Soon!**



OV3501315MPOPM

FIS HANDHELD MULTI-FIBER TEST SET (MTP/MPO)

The FIS Multi-Fiber Test Set is a two-piece kit that contains a power meter and light source designed to test up to 12 fibers quickly and easily. This set will provide the user with link attenuation (dB loss) and ORL readings in less than 15 seconds! By using the included MPO to LC breakout cables as power reference cords, the units operate like a traditional single-fiber power meter & light source does.

An additional feature of these units is that they are built with 12-fiber MPO adapter test ports, easily converting them into a dB loss/ORL test set for MPO cables and polarity verification. Pass/Fail thresholds are customizable and saved results can be transferred to the included PDF report computer software.

FEATURES

- Measure Optical Loss on all 12 MPO Channels
- Pass/Fail Reporting with Customizable Thresholds
- Dual Wavelength Auto-Test Feature
- ORL Measurement Range to -60 dB (SM only)
- Verify A, B, C and 40G Polarities
- 650nm VFL
- Auto Center/Pass/Fail Video Scope (probe sold separately)
- Rugged Case w/ Impact Resistant Bumpers
- Fiber Identification Feature

PART #	DESCRIPTION	PRICE
OV3508513MPOK	FIS MPO 12 Multi-Fiber Test Set (MM Power Meter with 850/1300nm Source)	\$4,995.00
OV3501315MPOK	FIS MPO 12 Multi-Fiber Test Set (SM Power Meter with 1310/1550nm Source)	4,995.00
OV3508513MPOLS	FIS MPO Multimode Light Source 850/1300nm	2,995.00
OV3501315MPOLS	FIS MPO Singlemode Light Source 1310/1550nm	2,995.00
OV3508513MPOPM	FIS MPO Multimode Power Meter	1,995.00
OV3501315MPOPM	FIS MPO Singlemode Power Meter	1,995.00
VIS300	Optional Inspection Probe with 2.5mm & 1.25mm Universal Inspection Tips (200x)	750.00

* Call and speak with a FIS Representative to inquire about 16 or 24 fiber options.

FIS MPO VISUAL FAULT LOCATOR WITH POLARITY VERIFIER

This rugged, weather and shock resistant MPO VFL for Multimode or Singlemode cable assemblies is a great troubleshooting tool that is needed to establish or confirm polarity, continuity, and macrobends within an MPO optical system. If no breakout cassette is present, the polarity verifier unit (F1-OPV), when used on the far end of a MPO/MTP cable can provide the user a quick, safe and easy determination of continuity and polarity of the fibers within the MPO cable assembly. This new one of a kind product is a must for any pre- and post-installation technician!

FEATURES

- Three different laser output sequences: Auto, Manual, 5G Polarity
- Auto shut off option (10 minutes being idle)
- Rugged, lightweight design
- Water Resistant
- Self-closing shutter on MPO adapter
- Long battery life, up to 10 hours on full charge
- Outdoor enhanced screen
- Backlight option, great for dim lighted areas
- 650nm visible light (minimum output power of -1dBm)
- Includes Optical Polarity Verifier and two OM3 MPO patchcords.
- **Optional Singlemode Conversion Kit.** Conversion Kit includes (4) hybrid APC to UPC MPO jumpers & (2) mating sleeves.

PART #	DESCRIPTION	PRICE
F1-MPOVFL	FIS MPO VFL with Optical Polarity Verifier and OM3 Patchcords	\$1,995.00
F1-MPOVFLSMKIT	SM Conversion Kit with APC to UPC MPO Jumpers w/ mating sleeves	275.00
F1-OPV	MPO VFL Optical Polarity Verifier	150.00



F1-MPOVFL

F1-OPV

FIS MPO ENCIRCLED FLUX REFERENCE CORD

Ever increasing network speeds and tighter loss budgets make qualifying multimode fiber links a formidable challenge. Part of the challenge can stem from test instruments. In some scenarios different test instruments can produce different measurement results on the same network due to variations in launch conditions between test sources. Encircled Flux (EF) standards, TIA-526-14-B and IEC 61280-4-1 Ed. 2.0, define a method of controlling multimode launch conditions for optical test sources. More consistent test source launch conditions equate to more accurate and repeatable measurements. This is the goal driving the migration to encircled flux standards.

PART #	DESCRIPTION	PRICE
F1EFRC-OM3	OM3 Encircled Flux Reference Cord, 2mtr	\$235.00



F1EFRC-OM3

FIS FTTx DOWNSTREAM PON POWER METER

The FIS FTTx Downstream PON Power Meter is expertly designed with the FTTx technician in mind, offering the precision and reliability needed for seamless network testing. This advanced tool accurately reads GPON, XGS PON and NGPON2 downstream traffic simultaneously, including 1490nm, 1550nm, 1577nm and 1596-1603nm. A Broadband Power Meter can also be added to cover all testing applications. An optional microscope (VIS-300) allows for thorough connector endface inspection before testing. This all-in-one kit is the ultimate solution for efficient and accurate fiber optic diagnostics within the FTTx industry.

FEATURES

- Auto Center/Pass/Fail Video Scope System
- Adapters available for all popular connector types
- Broadband Wavelengths: 850/1300/1310/1490/1550/1625nm
- +5 to -70 dBm PM Dynamic Range
- 650nm VFL
- Stores Scope Images and Power Measurements
- Rugged Case w/ Impact Resistant Bumpers
- Fiber Identification Feature



VIS-300

PART #	DESCRIPTION	PRICE
OV350DPMGXG	FIS GPON/XGPON Downstream Power Meter (1490/1550/1577nm)	\$1,195.00
OV350DPMNG2	FIS GPON/XGPON +NGPON2 Downstream Power Meter (1490/1550/1577nm & 1596-1603nm)	1,395.00
OV350DPMXNGB	FIS GPON/XGPON +NGPON2 Downstream Power Meter (1490/1550/1577nm & 1596-1603nm)+ Broadband Power Meter	1,595.00
OV350DPMGXGVIS	FIS GPON/XGPON Downstream Power Meter with VIS-300	1,795.00
OV350DPMNG2VIS	FIS GPON/XGPON +NGPON2 Downstream Power Meter, with VIS-300	1,995.00
OV350DPMXNGBVIS	FIS GPON/XGPON +NGPON2 + Broadband Power Meter, with VIS-300	2,195.00
VIS300	Optional Inspection Probe with 2.5mm & 1.25mm Universal Inspection Tips (200x)	750.00

FIS OPTICAL LOSS/ORL TEST SET

Enhance fiber testing with the FIS Optical Loss/ORL Test Set, featuring a -60 dB ORL range, +5 to -70 dBm dynamic range, and 650nm VFL for precise fault detection. Auto wavelength switching, fiber identification, and a 3.5" touch display streamline operations, while storage for 5,000 tests ensures efficiency. Built for reliability, its rugged case with impact-resistant bumpers offers durability. The auto center/pass/fail video scope (probe sold separately) simplifies inspections—perfect for professionals demanding accuracy and speed.

FEATURES

- Optical Loss/ORL Tester
- ORL Measurement Range to -60 dB
- +5 to -70 dBm PM Dynamic Range
- Auto Center/Pass/Fail Video Scope (probe sold separately)
- Auto Wavelength Switching
- 650nm VFL
- Stores up to 5,000 tests
- 3.5" Touch Color Display
- Rugged Case w/ Impact Resistant Bumpers
- Fiber Identification Feature

PART #	DESCRIPTION	PRICE
OV350QUADLTS	FIS QUAD (SM/MM) Optical Loss/ORL Test Set	\$1,995.00
OV3501315LTS	FIS Singlemode (1310/1550nm) Optical Loss/ORL Test Set	1,695.00
OV3508513LTS	FIS Multimode (850/1300nm) Optical Loss/ORL Test Set	1,695.00
VIS300	Optional Inspection Probe with 2.5mm & 1.25mm Universal Inspection Tips (200x)	750.00



OV3508513PM

Coming Soon!

NEW



OV350QUADLTS

FIS Expands R&D for Custom Test Equipment, Let Us Design Your Solution!


FIS is excited to expand our research and development efforts in fiber optic test and measurement instrumentation at our Oriskany, NY American Standards Lab facility! Our team of engineers have over 100 years of combined experience, we ensure solutions are tested and built with the most advanced cost effective technologies to meet your evolving needs.


The FIS team has been at the forefront of fiber optic innovation—from pioneering the world's first microprocessor-driven OTDRs to delivering high-precision power and light source measurement solutions.

As we move into 2025, the FIS R&D team is developing cutting-edge, affordable, high-value fiber optic test equipment.

We look forward to supporting your needs and delivering solutions for the next era of fiber optic technology! Call Robert Licari, FIS Test Equipment Product Line Manager for your customized fiber test equipment quote today!

Robert Licari
315-737-2192 | rlicari@fissales.com



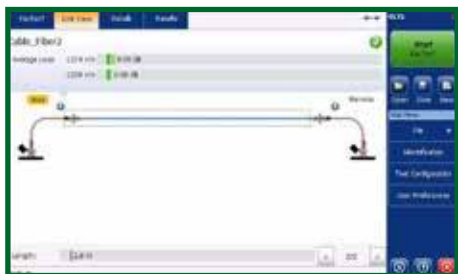

EXFO MAXTESTER 945 TELCO OPTICAL LOSS TEST SET(OLTS)

The first tablet-inspired multifunction optical loss test set (OLTS) measuring insertion loss (IL), optical return loss (ORL) and fiber length at two wavelengths in 5 seconds via fully automated bidirectional FasTest™ analysis. Two units (or modules) must be used in conjunction with each other on opposite ends of the cable under test.

Each Unit Includes: AC Charger, Rechargeable lithium-polymer, Case and Shoulder Strap.

PART #	DESCRIPTION	PRICE
MAX-945-SM1-XX	OLTS, IL, Length & ORL Measurement, SM 1310/1550nm, InGaAs detector, connector to be specified (Single Unit)	\$6,175.00
MAX-945-SM1-RF-VFL-XX	OLTS, IL, Length & ORL Measurement, SM 1310/1550nm, InGaAs detector, Wi-Fi/Bluetooth, VFL, connector to be specified (Single Unit)	6,895.00
MAX-945-SM3-XX	OLTS, IL, Length & ORL Measurement, SM 1310/1550/1625nm, InGaAs detector, connector to be specified (Single Unit)	8,080.00
MAX-945-SM3-RF-VFL-XX	OLTS, IL, Length & ORL Measurement, SM 1310/1550/1625nm, InGaAs detector, Wi-Fi/Bluetooth, VFL, connector to be specified (Single Unit)	8,800.00
MAX-945-SM4-XX	OLTS, IL, Length & ORL Measurement, SM 1310/1490/1550nm, InGaAs detector, connector to be specified (Single Unit)	7,565.00
MAX-945-SM4-RF-VFL-XX	OLTS, IL, Length & ORL Measurement, SM 1310/1490/1550nm, InGaAs detector, Wi-Fi/Bluetooth, VFL, connector to be specified (Single Unit)	8,285.00
MAX-945-iCERT-Q1-QUAD-XX	OLTS, IL, Length Measurement, ORL on SM port, Simplex cable test (on SM port) and Duplex cable test, Tier-1 Certification per international standards, EF compliant 50/125µm, Port 1 MM 850/1300nm, Port2 SM 1310/1550nm, InGaAs detector, connector to be specified (Single Unit)	8,040.00
MAX-945-iCERT-Q1-QUAD-RF-VFL-XX	OLTS, IL, Length Measurement, ORL on SM port, Simplex cable test (on SM port) and Duplex cable test, Tier-1 Certification per international standards, EF compliant 50/125µm, Port 1 MM 850/1300nm, Port2 SM 1310/1550nm, InGaAs detector, Wi-Fi/Bluetooth, VFL, connector to be specified (Single Unit)	8,760.00

Call For Configurator Connector Options (VFL or Video Probe). Part numbers and pricing above are for single units, but needs to be purchased or used in pairs. Works with FTB modular version (FTBx-945-xx). Call for details. XX - indicate adapter style upon purchase.

EXFO



EXFO OPTICAL POWER EXPERT

EXFO OPTICAL POWER EXPERT

State-of-the-art power meter with Bluetooth connectivity, a wide touchscreen and best-in-class optical performance in a pocket-sized form factor. Turns on instantly for use on the go and available in two configurations: PX1 and PX1-PRO. The PX1 includes 11 calibrated wavelengths. The PX1-PRO has an integrated visual fault locator, auto-wavelength recognition and switching, has 45 calibrated wavelengths and comes in a soft pouch. Both the PX1 and PX1-PRO are available with either standard InGaAs detector (10 to -70 dBm) or high-power InGaAs detector (26 to -50 dBm).

FEATURES

- Connect to smart app via Bluetooth: data reporting from the field, cloud storage, workflow management
- User-friendly: Compact, color touchscreen and intuitive interface
- Robust and rugged: IP54 design for dust and water protection
- Time-saving features: no offset nulling, lightning-fast boot-up
- Data storage
- Error-free, automated wavelength recognition, Tone Detection and switching (on PRO only)
- 3-year warranty and calibration interval
- Visual fault locator (on PRO only)

PART #	DESCRIPTION	PRICE
PX1-S-XX	InGaAs detector, 11 Calibrated Wavelengths	\$705.00
PX1-H-XX	High-power InGaAs detector, 11 Calibrated Wavelengths	765.00
PX1-PRO-S-XX	InGaAs detector, VFL, 45 Calibrated Wavelengths organized in wavelength bundles, Auto wavelength recognition & switching, Soft pouch carry case	985.00
PX1-PRO-H-XX	High-power InGaAs detector, VFL, 45 Calibrated Wavelengths organized in wavelength bundles, Auto wavelength recognition & switching, Soft pouch carry case	1,035.00
FOAS-32	ST connector adapter for PX1 and PX1 Pro	50.00
FOAS-54	SC connector adapter for PX1 and PX1 Pro	50.00
FOAS-98	LC connector adapter for PX1 and PX1 Pro	50.00

Universal connector adapters and FC connector adapter also available. XX - indicate adapter style upon purchase.

AFL FLOWSCOUT® THROUGH-MODE PON POWER METER

AFL's FlowScout Through-Mode PON Power Meter identifies, measures, and qualifies both downstream and upstream signal levels in FTTx PON networks. It is perfect for technicians responsible for activating and maintaining networks carrying a mix of GPON/EPON, video, and next gen PON (XG/XGS-PON, 10GEPON) wavelengths. Unlike competing through-mode PON Power Meters, AFL's FlowScout requires no setup. Technicians simply plug in the fiber under test to see results displayed in seconds on the large color touchscreen. Storage and reporting options are included to verify and document results from the field. FlowScout's rugged design makes it perfect for outside plant environments where it can be dropped, get dirty or even wet. And because it is so easy to use, FlowScout requires little, if any, training.

FEATURES

- Detect multiple wavelengths automatically - NO setup required!
- Detects GPON, XGS-PON, and Video signals all at once
- Rugged and water resistant, IP54 rating
- Field-swappable connector adapters
- Large color touchscreen display daylight viewable
- QR code generation speeds sharing results to coworkers

PART #	DESCRIPTION	PRICE
TPPM-XG-0900PR	FlowScout PON optical power meter XGPON/XGSPON	\$2,495.00
DPPM-100-0902PR	FlowScout Downstream PON Power Meter Kit Includes: FlowScout Downstream PON Power Meter, SC/APC connector adapter, AC charger, quick reference guide, and soft carry case	995.00
OPM8-SP3-PLUS	FlowScout OPM8-L Plus Kit, Includes: FlowScout OPM8-L power meter, AC charger and power cable, user guide, FlexReports Power software, and soft carry case.	1,265.00
OLS8-SM XGS	FlowScout OLS8-SM XGS (1310/1490/1550 nm) Basic Kit, Includes FlowScout OLS8-SM XGS light source, AC charger and power cable, quick reference guide, and soft carry case.	2,970.00



DPPM-100-0902PR

AFL



EXFO PPM1 SERVICE ACTIVATION PON POWER METER

Next-generation passive optical networks (PONs) will, in most cases, leverage existing outdoor plant infrastructure already in use for PON customers. Adding new services on existing networks translates into overlaying multiple wavelengths on the same physical fiber plant. EXFO's PPM1 is compatible with multiple services including GPON, EPON, XGS-PON, RF video overlay, RFoG and 10G-EPON technologies. Its PON-layer wavelength-selective design allows it to measure up to two downstream signals simultaneously, assessing power level for rapid and reliable service activation. By leveraging customizable or preset PON layer configurations, the PPM1 notifies the user and the Unique PON-aware™ capability: helps to select the appropriate PON technology under test for proper pass/fail assessment, enabling error-free testing.

PART #	DESCRIPTION	PRICE
PPM1-D-88-GP-2267	PPM1 Service Activation PON PM, Dual PON Layer, 1490/1550/1577nm	\$1,329.00
PPM1-PRO-D-88-GP-2267	PPM1 Pro Service Activation PON PM, Dual PON Layer, VFL, 1310/1490/1550/1577/1625nm (Auto-wavelength recognition and switching, Tone detection, Broadband power meter mode), with soft pouch	1,629.00



AFL FLOWSCOUT OPTICAL LOSS TEST KITS

AFL's FlowScout Optical Loss Test Kits include the OPM8 optical power meter and FlowScout OLS8 optical light source. These next generation smart optical power meters and optical light sources are designed on the legacy of the AFL/Noyes OPM and OLS series. These inclusive kits provide rapid loss testing with pass/fail results for use in enterprise LAN, data center, PON, and broadband networks.

The difference between the BASIC and PLUS Kits are that the PLUS Kits include "Flex Reports" PC software.

PART #	DESCRIPTION	PRICE
SMLP8-04-BAS	SMLP8-04 Quad BASIC kit, including FlowScout OLS8-Quad light source, FlowScout OPM8-L power meter, AC charger and power cables, Quick Reference Guide, and soft carry case	\$3,150.00
SMLP8-04-PLUS	FlowScout SMLP8-04 Quad PLUS kit, including FlowScout OLS8-Quad light source (SC), FlowScout OPM8-L power meter (2.5mm), AC charger and power cable, Quick Reference Guide, FlexReports Power and soft carry case	3,350.00

* For purchase of additional adapters see page 32.



EXFO PON POWER METER

The PPM-350D power meter is the first PON-aware™ power meter to automatically detect and test next-gen and legacy PON technologies: GPON, EPON, 10G-EPON, XG(S)-PON, NG-PON2 and RF overlay. Pass/Fail indicators for easy assessment of power values. The most easy-to-use instrument of its kind: simply connect the fiber and read the results.

Includes: Quick Reference Guide, USB Cable, Software, User Guide on CD, Wrist Strap, and Protective Cover for Optical Ports.

PART #	DESCRIPTION	PRICE
PPM-350D-SR-EA-EUI-91	PPM-350D Next-Gen PON Power Meter, SC/APC Connector Interface	\$2,705.00
PPM-350D-DR-VFL-EA-EUI-91	PPM-350D Next-Gen PON Power Meter, with VFL, SC/APC Connector Interface	4,570.00
PPM-352C - PPM-352C-XX	PON Power Meter, 2 Ports, Extended range - BPON, EPON, GPON FTTX mode: 1310/1490/1550nm	1,915.00
PPM-352C-VFL - PPM-352C-VFL-XX	PON Power Meter, 2 Ports, Extended range - BPON, EPON, GPON FTTX mode: 1310/1490/1550nm, Visual Fault Locator	2,320.00



EXFO FIBERBASIX 50 SERIES POWER METER OR LIGHT SOURCE

The EPM-50 Power Meter allows power measurements up to 26 dBm with battery life of over 300 hours. It comes with a specific high power configuration for CATV and Telco markets. The ELS-50 Light Source offers the power stability and reliability necessary to perform loss measurement in Telco, CATV and FTTH applications using dual and triple wavelengths. Additional kits available.

Each Unit Includes: Soft pouch, PMA-22 FC connector adapter, LSA-89 FC connector adapter, quick reference sticker in five languages, Certificate of Calibration, Certificate of Compliance, and three AA batteries.

PART #	DESCRIPTION	PRICE
ELS5012CRBLSA89	Dual MM 850/1300nm Light Source with Rubber Boot, FC Adapter	\$690.00
ELS5023BLRBSA89	Dual SM 1310/1550nm Light Source with Rubber Boot, FC Adapter	1,225.00
EPM53RBPMA22	Power Meter with InGaAs Detector, Rubber Boot, FC Adapter	415.00
EPM53XRBPMMA22	Power Meter with High Power In GaAs Detector, FC adapter	455.00



SMARTPOCKET V2 LIGHT SOURCES, POWER METERS AND TRUEPON TESTER

PART #	DESCRIPTION	PRICE
OLS-34V2	MM Source 850/1300nm SC mounted FC enclosed	\$1,193.75
OLS-35V2	SM Source 1310/1550nm SC mounted FC enclosed	2,007.95
OLS-36V2	SM+MM Quad Source 850/1300/1310/1550nm SC mounted FC enclosed	2,744.95
OLS-38V2	SM Source 1310/1550/1625nm SC mounted FC enclosed	2,744.95
OLP-35V2	Broadband Power Meter with UPP Adapter	684.95
OLP-38V2	High Power Broadband Power Meter with UPP Adapter	787.95
OLP-37XV2	Selective PON Power Meter SC mounted FC enclosed	1,070.00
OLP-39X	TruePON Tester Terminate Mode GPON and XGS-PON	1,749.95





NEW

Also works
with MPO
Connectors



F1-VM400D



Monitor Included with Microscope

FIS BENCHTOP MICROSCOPE WITH MONITOR

The FIS Benchtop Microscope uses the latest technology to provide users with 200x & 400x magnifications to spot scratches on fiber connectors. It is ideal for factory postpolish; QC inspection and patch cord assembly production. Adjustable in horizontal and vertical up to 4mm and 3mm, ideal to test the MPO, MTRJ, duplex or other high density connectors. Also great for large core fiber inspection.

FEATURES

- Coaxial LED Lighting
- 200X and 400X versions available.
- Tablet Monitor Included w/BNC Hookup
- 2.5mm & 1.25mm Universal Adapters Included
- BNC - BNC Cable Provided
- User Adjustable Image Centering
- Manual Focus

PART #	DESCRIPTION	PRICE
F1VM200D	FIS 200X Benchtop Video Microscope with detached 8 inch Monitor 110 volt, Includes Power Supplies, Universal 2.5mm and 1.25mm UPC Adapters for connector endface inspection. (SCAPC, LCAPC, Duplex LC and MPO adapters sold separately)	\$595.00
F1VM400D	FIS 400x Benchtop Video Microscope with detached 8 inch Monitor 110 volt, Includes Power Supplies, Universal 2.5mm and 1.25mm UPC Adapters for connector endface inspection. (SCAPC, LCAPC, Duplex LC and MPO adapters sold separately)	595.00
F1VMLCDX	FIS Duplex LC Female Scope Adapter for FIS F1VM200D and F1VM400D Benchtop Video Microscopes	50.00
F1VMSCA	FIS SC/APC Female Scope Adapter for FIS F1VM200D and F1VM400D Benchtop Video Microscopes	50.00
F1VMLCA	FIS LC/APC Female Scope Adapter for FIS F1VM200D and F1VM400D Benchtop Video Microscopes	50.00
F1VMSMA	FIS SMA905 Scope Adapter for FIS F1VM200D and F1VM400D Benchtop Video Microscopes	50.00
F1VMMPOAF	FIS MPO/APC Female Scope Adapter for FIS F1VM200D Benchtop Video Microscopes (only for use with the 200x version)	120.00
F1VMMPOUF	FIS MPO UPC Female Scope Adapter for FIS F1VM200D Benchtop Video Microscopes (only for use with the 200x version)	120.00



F17500VIS



FIS HANDHELD FIBER INSPECTION PROBE

Full Featured Probe; With Built-In Display

This Handheld Fiber Inspection Probe, our newest offering at FIS, is loaded with features at a comparably low cost. The ergonomic hand held design can be used in a completely vertical/horizontal fashion or it can fold inward to about a 45 degree angle allowing it to be used in a number of positions within an enclosure or patch panel.

With the push of one button the probe will lock onto the connector end face image, automatically center and focus it and then analyze it against the industry I.E.C. end face inspection criteria to display a PASS or FAIL. The probe has a Wi-Fi USB adapter that can be used to transfer saved data wirelessly to a laptop or computer. USB hardwire connection also is available.

FEATURES

- Auto-Focus, Auto-Centering, with Pass/Fail Analysis
- Unit comes included with 2.5mm & 1.25mm UPC patch cord tips and LC bulkhead tips
- APC and MPO tips available upon request
- Convenient LED flashlight on-board

PART #	DESCRIPTION	PRICE
F17500VIS	FIS Fiber Inspection Probe	\$1,995.00
F17500MPO	MPO/MTP Inspection Scope Tip MM UPC for F17500VIS	1,285.00
F17500SCA	FIS Bulkhead Inspection Tip SC/APC for F17500VIS	52.00
F17500UA25	FIS 2.5 APC Universal Tip for F17500VIS	52.00
F17500UA125	FIS 1.25 APC Universal Tip for F17500VIS	52.00
F17500ULCA	FIS Bulkhead Inspection Tip LC/APC for F17500VIS	140.00
F17500UPCK	UPC tip Replacement Kit (includes 5 tips that comes with unit)	210.00

FIS FIBER OPTIC INSPECTION MICROSCOPE

FEATURES

- Fast, easy focus with one hand operation
- Inspect patchcords (male) and in-adapter connectors (female)
- Comprehensive line of tips for both PC and APC type connectors
- 400x Magnification
- Resolution - 0.5µm detectable
- Manual focus adjustment

PART #	DESCRIPTION	PRICE
F1-DI1000	FIS Digital USB Inspection Probe Kit	\$890.00
F1-DI2000	FIS Digital USB Inspection Probe Kit with Auto Focus	1,025.00
F1-DI3000	FIS Wireless Digital Inspection Probe with Auto Focus	1,295.00
F1-CI1100	FIS Digital USB Inspection Probe and Monitor Kit	1,095.00



F1-DI3000

FIS PROBE ADAPTER TIPS

*Call For More Tip Options

PART #	DESCRIPTION	PRICE
F1-PT2U25APCM	Universal 2.5mm probe tip for APC male connectors	\$90.00
F1-PT2FSAPCF	Tip for SC and FC APC female connectors	90.00
PT2SCPCFL	Long Extended tip for SC PC female connectors	260.00
PT2LCPCFL	Long Extended tip for LC PC female connectors	260.00
PT2MTPAPCEXT	Extended tip for MTP/APC 12-Fiber connectors	427.00

FIP-500 FIBER INSPECTION SCOPE

Fastest inspection in the industry for duplex, single fiber and multi fiber connectors, with the most reliable results. Self-contained, fully automated tool for zero-button testing all day without the need to recharge batteries or off load results.

KEY FEATURES AND BENEFITS

- Best-in-class optical performance for accurate and repeatable results
- Zero-button inspection: 100% automated from insertion to data saving (auto-detect, auto-brightness, auto-focus, auto-center, auto-capture, auto-analysis, auto-save and auto-reset)
- Automated threshold adjustment with SmartTips
- Fastest inspection in the industry (within 10 seconds for MPO-12 from connection to analyzed and saved result)
- Wide array of adapter tips for single-fiber and multi-fiber connectors (e.g., LC, SC, ST, OptiTap®, OptiTip®, MPO)
- Smartphone-grade 2.4-inch color touchscreen
- Quick-connect design: quarter-turn click for switching between any tips
- Long-lasting battery: 11 hours
- Stores test results locally - 2000 (MPO-12) or 10 000 (single-fiber)
- On-board connector endface analysis (as per IEC standards, Edition2 and Edition3)
- EXFO EXCHANGE cloud job management and PDF reporting

APPLICATIONS

- Central offices, exchanges and headends
- Data centers, Military and Aerospace
- Wireless (e.g., 5G, FTTH, DAA, small cells)
- Fiber-to-the-home (FTTH)

EXFO



FIP-500

PART #	DESCRIPTION	PRICE
FIP500KIT1	MPO UPC inspection: Includes FIP-500-1 with interchangeable multi-fiber optical head (OHMF), MPO/UPC SmartTip (STIP-MPO-U), soft carrying case	\$5,740.00
FIP500KIT2	MPO APC inspection: Includes FIP-500-1 with interchangeable multi-fiber optical head (OHMF), MPO/APC SmartTip (STIP-MPO-A), soft carrying case	5,740.00
STIP-MPO-U	MPO/UPC SmartTip	275.00
STIP-MPO-A	MPO/APC SmartTip	275.00
STIP-OTIP-A	OptiTip/APC SmartTip	480.00
STIP-QODC12-U	QODC-12/UPC SmartTip	275.00
STIP-QODC12-A	QODC-12/APC SmartTip	275.00
STIP-MMC-A	FIP-500 SmartTip: MMC Bulkhead connector	695.00
STIP-LC-DF-A	LC/APC DUPLEX Bulkhead connector SmartTip	675.00
STIP-SN-DF-U	SN/UPC DUPLEX Bulkhead connector SmartTip	575.00

* EXFO FIPT 400 Series Probes see page 27.

AFL FOCUS FLEX FIBER OPTIC CONNECTOR INSPECTION SYSTEM

FOCIS Flex is an ultra-compact Fiber Optic Connector Inspection System Scope utilizing the latest liquid lens technology for fast auto-focus, centering and PASS/FAIL analysis. Results can be stored locally or easily shared via USB, Wi-Fi and Bluetooth®.

PART #	DESCRIPTION	PRICE
FOCIS-FLX-P4XN	FOCIS FLEX, Bluetooth Wi-Fi Enable, No Tips	\$2,245.00
FOCIS-FLX-P4XU	FOCIS FLEX, Bluetooth Wi-Fi Enable, UPC Tips	2,345.00
FOCIS-FLX-P4XA	FOCIS FLEX, Bluetooth Wi-Fi Enable, Angled Tips	2,445.00
FOCIS-FLX-P4XUA	FOCIS FLEX, Bluetooth Wi-Fi Enable, UPC and Angled Tips	2,545.00
FOCIS-FLX-NW-P4XN	FOCIS FLEX, without Bluetooth Wi-Fi, No Tips	2,245.00
FOCIS-FLX-NW-P4XU	FOCIS FLEX, without Bluetooth Wi-Fi, UPC Tips	2,345.00
FOCIS-FLX-NW-P4XA	FOCIS FLEX, without Bluetooth Wi-Fi, Angled Tips	2,445.00

AFL FOCUS LIGHTNING2 FIBER OPTIC CONNECTOR INSPECTION SYSTEM

FOCIS Lightning2 is a compact, self-contained inspection probe designed to inspect MPO and single fiber connectors. A single button provides auto-focusing, centering, and pass/fail analysis at the connector and individual fiber level.

PART #	DESCRIPTION	PRICE
FOCIS-LT2-N	FOCIS Lightning2 kit, Bluetooth enabled, No Tips	\$4,095.00
FOCIS-LT2-UA	FOCIS Lightning2 kit, Bluetooth enabled, MPO tips	4,600.00
FOCIS-LT2-UASF	FOCIS Lightning2 kit, Bluetooth enabled, MPO tips and single fiber adapter	4,750.00
FOCIS-LT2-NW-N	FOCIS Lightning2 kit, No wireless, No Tips	4,095.00
FOCIS-LT2-NW-UA	FOCIS Lightning2 kit, No wireless, MPO tips	4,600.00
FOCIS-LT2-NW-UASF	FOCIS Lightning2 kit, No wireless, MPO tips and single fiber adapter	4,750.00

AFL



FOCIS LIGHTNING2

FOCIS FLEX

FIS 200x & 400x MINI FIBER MICROSCOPE

Utilize this compact scope to inspect connector ferrule end faces for dirt, debris or oils that may interfere with signal transmission. Scope has both Oblique and Coaxial white LED lighting.

Includes: Microscope, (3) 1.5v LR44 Button Batteries, 2.5mm adapter, 1.25mm adapter

PART #	DESCRIPTION	PRICE
F1-MS200U	Compact 200x Microscope	\$118.95
F1-MS400U	Compact 400x Microscope	118.95



F1-MS200U

Best Value
in the
Industry



F1-9000 (Ruggedized)



F1-VFL

FIS RUGGED POCKET FAULT LOCATORS

The FIS Fiber Optic Pocket Fault Locators are designed to be rugged, compact and lightweight. These units are 7.1" in length and weigh approximately 4.5oz. With a 30-hour battery life in continuous mode and 40 hours in modulated mode, the bright 650nm (red) laser which has a range of up to 5Km ensures fast and easy location of fault points within fiber optic patchcords, patch panels and enclosures. They can also be used to identify fibers in multi-fiber cables, and it is designed for both singlemode and multimode fiber optic applications. These units are shipped with two "AA" batteries and a belt holster.

PART #	DESCRIPTION	PRICE
F1-9000	Rugged Fault Locator with 2.5 Universal Adapter (SM and MM), Rugged Aluminum Housing, 40hr Battery Life, 650nm, 5km, 7.1"x0.86", Blue	\$110.00
F1-9000125	Rugged Fault Locator with 2.5 & 1.25 Universal Adapters (SM and MM), Rugged Aluminum Housing, 40hr Battery Life, 650nm, 5km, 7.1"x0.86", Blue	125.00
F1-VFL	Pocket Fault Locator with 2.5 Universal Adapter (SM and MM), Plastic Housing, 30hr Battery Life, 650nm, 5km, 4.5" x 1.4" x 0.8", Black case	\$69.95




F1-90125

FIS ECONOMY VFL 2.25mm -1.25mm ADAPTER (LC)

This adapter allows you to convert the 2.5mm adapter on your VFL into a 1.25mm ferrule typically for LC style connectors.

PART #	DESCRIPTION	PRICE
F1-90125	1.25mm Adapter (Compatible with PFL's using Universal 2.5mm Adapters)	\$30.00

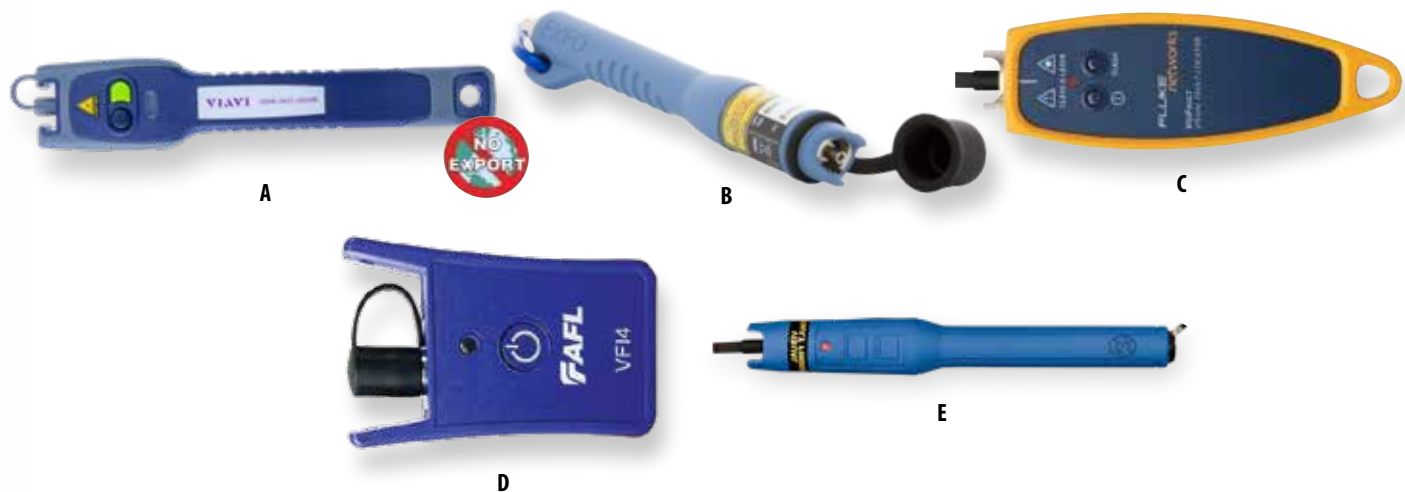

Fault Locators are a special class of light sources that emit a high intensity visible Red Laser into a patch cable or cable. This light can be used to both check the continuity of a fiber and identify the fiber's far end, or it can be used to visually identify the location of a fiber break. Most Fault Locators come optimized for singlemode fiber use; however they work equally as well with multimode fiber.

Manufacturer	Part Number	Type	Operating Wavelength	Distance	Fiber Type	Battery Life/ Type	Optical Interface	Dimension	Special Feature	Price
A	FFL-105	Pocket	650nm	12km	SM/MM	80hrs (2AA)	2.5mm Universal	8.3" x 1.6" x 1"	5 mW Output (Class 3R)	\$349.00
B	FLS-241-UNIV	Pocket	635nm	5km	SM/MM	50hrs(2AAA)	2.5mm Universal	6.875" x 1"	Weather Proof	\$435.00
C	VISIFAULT	Pocket	650nm	4km 3km	SM/MM	80hrs(2AA)	2.5mm Universal	6.2" x 2.0" x 1.3"	Long Battery Life	\$519.00
D	VFI4010900PR	Pocket	650nm	4km 10km	SM/MM	30hrs(1AA)	2.5mm Universal	3.1" x 2.0" x 0.9"	Small Key Chain Size	\$150.00
E	VFF5	Pocket	650nm	5km 5km	SM/MM	80hrs (2AA)	2.5mm Universal	8.7" x 1.25"	Rugged Aluminum Housing	\$340.00

FIS DUAL SOURCE VISUAL FAULT LOCATOR

Fiber Instrument Sales introduces it's Dual Source Visual Fault Locator specially made for duplex LC connectors. Because LC connectors are commonly clipped together this product eliminates the common mistake that is made of crossing Tx and Rx patchcords to active equipment. This unit allows the user to toggle between the "A" and "B" sources to ensure that everything is properly connected.

Each Unit Includes: Carrying pouch, 9V Battery, User Manual, One Year Warranty

FEATURES

- Dual visual fault locator (650nm) for duplex LC cables
- 9 volt battery included
- Up to 5Km Range
- Easy to identify the fault's location
- Easy verification of duplex cable polarity
- Quick identification of continuity of installation
- Low battery indicator light
- "A" and "B" source indicator lights
- Ergonomically friendly handheld soft case
- Plug and Play LC mating sleeve allows for secure connection
- Can activate single or both sources simultaneously, one modulates while one is constant

PART #	DESCRIPTION	PRICE
F1DXVFL	FIS Dual Source Visual Fault Locator, LC Duplex, SM/MM, 3"(w) x 4.25"(h)	\$295.00
F1DXVFLMDC	FIS Dual Source Visual Fault Locator, MDC Duplex Interface, SM/MM, 3"(w) x 4.25"(h)	295.00

FIS MINI MPO VISUAL FAULT LOCATOR

The new FIS Mini MPO Visual Fault Locator is able to test all channels utilizing two sources with source "A" lighting up channels 1 thru 6 and source "B" lighting up channels 7 thru 12. As with most MPO networks, continuity and polarity verification can prove challenging and time consuming. Traditional methods involve expensive breakout cables and single fiber visual fault locators, checking only one channel at a time. The new Mini MPO Visual Fault Locator made by FIS, allows the user to quickly ensure the proper continuity of all channels of the MPO cable with visible light. Its handheld design, coupled with its straight forward easy to use keypad interface will determine if all channels are properly installed.

FEATURES

- Mini MPO visual fault locator for MPO/PC Connectors
- Dual Source Visual Fault Locator; Source A Ch 1-6, Source B Ch 7-12
- 9 volt battery included
- Can activate single or both sources simultaneously, one modulates while one is constant
- Plug and Play MPO mating sleeve allows for secure connection
- Can verify MPO/MTP cable assemblies up to 300 meters (singlemode and multimode)
- Easy to identify continuity
- Quick identification of continuity after installation
- Low battery indicator light
- "A" and "B" source indicator lights
- Small handheld design
- Accepts Female MPO/PC Connectors Only

PART #	DESCRIPTION	PRICE
F1MPOVFLHH	FIS MINI MPO Visual Verifier	\$495.00
F1OPV	FIS MPO/MTP VFL Optical Polarity Verifier	150.00
F1MPOVFLSMKIT	Singlemode Conversion Kit	275.00

FIS HIGH POWERED VISUAL FAULT LOCATOR

This enhanced FIS Visual Fault Locator is now made with a higher power 650nm red, visible laser (up to 4.5mW) to now be used as a longer range VFL than our traditional offering 1 mW version. This unit, because of its higher power can detect bends and verify continuity on up to 10km or more of fiber! An essential tool for troubleshooting any standard fiber optic system. Internal optics are used to optimize the unit's performance for either single mode or multimode fiber applications. Our higher powered VFL is made in the United States with pride!

Each Unit Includes: Manual, (1) 9v Batteries, and Carry Case.

PART #	DESCRIPTION	PRICE
OF-1000-UF	High Powered Visual Fault Locator with 2.5mm Universal Adapter (MM and SM)	\$295.00
OF-1000U-LC	High Powered Visual Fault Locator with LC Adapter (MM and SM)	295.00
OF-1000U-FCA	High Powered Visual Fault Locator with FC/APC Adapter (SM)	295.00
OF-1000U-SCA	High Powered Visual Fault Locator with SC/APC Adapter (SM)	295.00

FIS CONTINUITY TESTER

A Continuity Tester enables you to easily verify light throughput as the LED transmits red light down the fiber, providing visual identification at the fiber's far end. Operates with two "AA" size batteries (provided).

Recommended for Multimode Use Only. Each Unit Includes: Tester and (2) AA Batteries.

PART #	DESCRIPTION	PRICE
F1-5000U	Fiber Continuity Tester 2.5mm Universal (ST, FC and SC)	\$29.95
F1-500	Fiber Continuity Tester (ST)	29.95
F1-5000SMA	Fiber Continuity Tester (SMA)	39.95
F1-5000FC	Fiber Continuity Tester (FC)	29.95
F1-5000SC	Fiber Continuity Tester (SC)	29.95
F1-5000LC	Fiber Continuity Tester (LC)	29.95



F1-DXVFL



F1MPOVFLHH


F1OPV



OF-1000-UF



F1-5000 SC

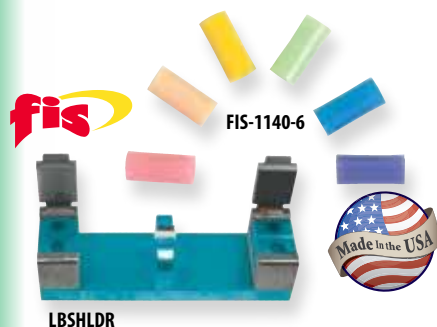

LBSHLDR

ELASTOMERIC LAB SPLICE

The improved FIS Elastomeric Lab Splice is ideal for making temporary fiber connections and can be reused hundreds of times. To use the splice for instrument testing, simply insert a cleaved pigtail from OTDR or Power Meter and the cleaved unconnectorized fiber to be tested. Excellent for both Multimode and Singlemode fiber, the splice accepts fiber cladding diameters of 125µm to 140µm. The Lab Splices are supplied in blister packs of 6 (containing one of each color: pink, peach, yellow, green, blue and purple) or 12 (containing 2 of each color.)

PART #	DESCRIPTION	PRICE
FIS-1140-6	Pack of 6	\$11.25
FIS-1140-12	Pack of 12	17.95
LBSHLDR	Lab Splice Holder	280.00



FIBERCONNECT1-USC

ANRITSU OTDR BARE FIBER PIGTAIL KIT

Save time by testing optical fibers without connectorizing. Easy-to-use, only a single drop of index matching oil is required. Strip, clean and cleave the fiber then insert into the unit until the end face meets the permanently mounted fiber. Specs: Choice of ST, SC or FC style connectors, Insertion Loss 0.6dB, Typical # of insertions: 2000.

Kit Includes: FiberConnect, Manual, Index Matching Oil, Maintenance Kit, Cleaning Brush, Magnetic Stand, Carry Case and Spare Pigtail.

PART #	DESCRIPTION	PRICE
FIBERCONNECT1-USC	FiberConnect Kit with SC/UPC pigtail	\$2,465.00
FIBERCONNECT1-UST	FiberConnect Kit with ST/UPC pigtail	2,465.00
FIBERCONNECT1-UFC	FiberConnect Kit with FC/UPC pigtail	2,465.00

***Excellent For Pre-Installation Reel Testing**



DVT-SMB3

DIVOT BARE FIBER TESTING DEVICE


The Divot™ is a faster system that uses index matching gel in disposable cartridges to allow for low loss connections and is much more forgiving of the quality of the cleaved fiber end. Each cartridge typically yields 500 insertions - 2 cartridges are included with the kit. Replacement cartridges can be purchased in packs of 3 or 12.

PART #	DESCRIPTION	PRICE
DVT-SMB3	Divot™ Bare Fiber Testing Device - SC 9µm Singlemode, 62.5µm and 50µm Multimode	\$395.00
DVT-RC3	Divot™ Replacement OCC Cartridge 3 pk	65.00
DVT-RC12	Divot™ Replacement OCC Cartridge 12 pk	250.00

FIS MULTIMODE MANDRELS

The use of mandrels in multimode insertion loss testing helps to ensure the proper launch condition into the fiber under test. By wrapping the fiber around the correct size mandrel, high order modes are stripped out and low order modes are spread out to achieve the desired launch conditions for testing. Each includes the mandrel and clip for holding the cable firmly in place during testing. Accepts jacket diameters from 1.6mm to 3.0mm and for use with both OM1, OM2 cable. When testing Corning ClearCurve fiber it requires a smaller 4mm radius mandrel which is available.

PART #	DESCRIPTION	PRICE
F1-MM6250	62.5/125µm and 50/125µm Mandrel Kit	\$40.95
F1-CCM04	4mm ClearCurve Mandrel (1.6 - 2.0mm jacket recommended)	40.95

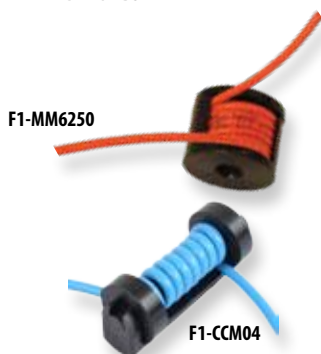

F1-MM6250

F1-CCM04

FIS UNIVERSAL TESTING SLEEVE

Designed specifically for testing applications, the FIS Universal Testing Sleeve reduces labor time while testing fiber optic patch cables with standard for 2.5mm ferrules. Adapters for ST or FC reference cord are available.

PART #	DESCRIPTION	PRICE
F1-81UNIV	FIS ST to 2.5mm Universal Test Adapter	\$25.00
F1-85UNIV	FIS FC to 2.5mm Universal Test Adapter	25.00




F1-81UNIV

F1-85UNIV

FIS GOLD TIPPED PIGTAIL

Plating gold onto a ferrule end creates a high back reflection characteristic at 1310nm and 1550nm when it is connected to a 1 meter length of singlemode fiber. The opposite end is connectorized with your choice of ST, FC, or SC style connector. APC SC and FC are also available.

PART #	DESCRIPTION	PRICE
F1-1080-ST	1 Meter ST/UPC Pigtail with Gold Tipped Ferrule	\$64.95
F1-1080-FC	1 Meter FC/UPC Pigtail with Gold Tipped Ferrule	64.95
F1-1080-SC	1 Meter SC/UPC Pigtail with Gold Tipped Ferrule	64.95
F1-1080-SCAPC	1 Meter SC/APC Pigtail with Gold Tipped Ferrule	65.95
F1-1080-FCAPC	1 Meter FC/APC Pigtail with Gold Tipped Ferrule	65.95



F1-1080-ST

SPLICING

FIS' patented SOC holder design is available in stock for most industry-leading Fusion Splicers. This gives the installer the luxury of installing a Cheetah or Armordillo SOC with the tools they already have. Each SOC holder will allow you to splice SC, LC, ST and FC connectors, with 1.6mm, 2.0mm, and 3.0mm cordage holders available for your more rugged installations. See the table below to find your fusion splicer combination. (Please note that use of Armordillo as well as ST/FC Cheetahs will require the FIS Universal SOC oven)



Visit us on our website to view the instructional videos on the Cheetah and Armordillo SOC's FIS CHEETAH & ARMORDILLO SOC COMPATIBILITY CHART

Manufacturer	Splicer Model	SOC Compatibility	SOC Holder Part Number	Cordage Holder Part Number (2.0mm/3.0mm only)
FIS	F1CA6+	900µm and 3.0mm	F1SOCSLACA6	F1SOC30CA6SLAHLDR
	F1AC5	900µm and 3.0mm	F1SOCSLAAC5	F1SOC30AC5SLAHLDR
	F1AC7	900µm and 3.0mm	F1SOCSLAAC7	F1SOC30CA7SLAHLDR
AFL/Fujikura	35S	900µm and 3.0mm	F1SOCSLAA	F1SOC30AFLSLAHLDR
	45S			
	41S			
	62S			
	70S			
	90S			
Furukawa/ Fitel	S123	900µm and 3.0mm	F1SOCSLAF	F1SLA30FTLHLDR/ F1SLA30FTL2HLDR
	S153		F1SOCSLAF	F1SLA30FTLHLDR/ F1SLA30FTL2HLDR
	S154		F1SOCSLAF2	F1SLA30FTLHLDR/ F1SLA30FTL2HLDR
	S179		F1SOCSLAF2	F1SLA30FTLHLDR/ F1SLA30FTL2HLDR
	NINJA		F1SOCSLAF2	F1SLA30FTLHLDR/ F1SLA30FTL2HLDR
Sumitomo	Q102CA	900µm and 3.0mm	F1SOCSLAS	F1SLA30SHLDR
	Q502S			
	T56+			
	T400			

Call a FIS Sales Representative for questions on Fusion Splicers not listed.

CHEETAH AND ARMORDILLO SOC HOLDERS

PART #	DESCRIPTION	PRICE
F1SOCSLACA6	FIS SOC Holder for FIS CA6 Splicer	\$100.00
F1SOCSLAA	FIS SOC Holder for the AFL Splicers	100.00
F1SOCSLAAC5	FIS SOC Holder for FIS AC5 Splicer	100.00
F1SOCSLAF2	FIS SOC Holder for the OFS Fitel Splicers (NINJA and S179)	100.00
F1SOCSLAS	FIS SOC Holder for the Sumitomo Splicers	100.00
F1LCDLXCLIP	LC duplex clip for FIS Splice on Connectors (Cheetah and Armordillo) Set of 5 clips	6.40
F1LCDLXCLIPLOCK	Lockable LC duplex clip for FIS Splice on Connectors (Cheetah and Armordillo) Set of 5 clips and locks	12.80
F1LCDLXT00L	Lock removal tool for lockable LC duplex clip for FIS Splice on Connectors (Cheetah and Armordillo)	2.99

CONTACT FIS
TO FIT YOUR
LEGACY
SPLICER TODAY!



F1LCDLXT00L



F1LCDLXCLIPLOCK

3/2mm ARMORDILLO SOC™ CORDAGE HOLDERS & SPLICE SLEEVE OVEN

PART #	DESCRIPTION	PRICE
F1-UNIVSOCOVEN	Cheetah and Armordillo Splice-On Connector Sleeve Oven	\$495.00
F1-SOC30CRIMPT00L	FIS Crimp Tool (Die and Handle) for the 3.0/2.0mm SOC	130.00
F1SOC30CA6SLAHLDR	FIS 3mm SLA Cordage Holder for FIS CA6	100.00
F1SOC30AC5SLAHLDR	FIS 3mm SLA Cordage Holder for FIS AC5	100.00
F1SOC30AFLSLAHLDR	FIS 3mm SLA Cordage Holder for AFL	100.00
F1SLA30SHLDR	FIS 3mm SLA Cordage Holder for Sumitomo	100.00
F1SLA30FTL2HLDR	FIS 3mm SOC Cordage Holder for Fitel Splicers	100.00
F1-SOC30FISHLDRCA616SLA	FIS 1.6mm SOC Cordage Holder for FIS CA6 Splicer	100.00
F1-SOC30FTLHLDR16SLA	FIS 1.6mm SOC Cordage Holder for Fitel Splicers	100.00
F1-SOC30AFLHLDR16SLA	FIS 1.6mm SOC Cordage Holder for AFL Splicers	100.00
F1-SOC30SHLDR16SLA	FIS 1.6mm SOC Cordage Holder for Sumitomo Splicers	100.00



F1-UNIVSOCOVEN



**FIS
Splice-On
Connector
Compatible**

**FREE FIS CA6+ Fusion
Splicer with
Purchase of
2,500 Connectors
in any combination!!**

Limited time offer



FIS CA6+ CORE ALIGNMENT SPLICER

FIS' New CA6+ Core Alignment Fusion splicer is the latest addition to the FIS Fusion Splicing product line. With the Contractor always in mind, the CA6+ is faster, more durable, and easier to use than ever. Fully compatible with FIS Cheetah and Armordillo Splice-On Connectors, this is the perfect fusion splice kit for both premise and long-haul applications.



FEATURES

- Fast Splice Time – 6 second splice in SM Quick Mode
- Fast Melt Time – 15 second Heating
- 310 Splice/Heat cycles per full battery charge
- Smart and Easy Operation with enhanced Field Toughness
- Metallic coated V-Groove for quick, easy cleaning
- On-board oven optimized for use with ALL FIS Cheetah Splice on Connectors (SC/LC/ST/FC)

PART #	DESCRIPTION	PRICE
F1CA6P	FIS CA6+ Core Alignment Fusion Splicer Kit w/FC-6R+ Cleaver, Cheetah SOC Holder, Spare ER-10 Electrodes, Sheath Clamps	\$7,495.00
F1CA6PH	FIS CA6+ Core Alignment Fusion Splicer PRO KIT w/FC-6R+ Cleaver, Cheetah SOC Holder, Spare ER-10 Electrodes, Sheath Clamps. Also includes 250um and 900um removable holders	8,045.00
F1CA6PNC	FIS CA6+ Core Alignment Fusion Splicer Kit w/ Cheetah SOC Holder, Spare ER-10 Electrodes, Sheath Clamps - no cleaver	6,400.00

CA6+ ACCESSORIES

PART #	DESCRIPTION	PRICE
FHS-025	250um Removable Fiber Holders (Pair)	\$300.00
FHS-09	900um Removable Fiber Holders (Pair)	300.00
ER-10	Replacement Electrodes for the CA6/CA6+	75.00
BC102	Battery charger kit for CA6/CA6+, includes BC-16 Li-Ion battery and ADC-16 charge AC adapter/cord	481.00

Cheetah
Splice-On Connector

TERMINATIONS IN LESS THAN 3 MINUTES
Visit us on our website to view the instructional videos on the Cheetah and Armordillo SOC's

NEW
50 Count Available
For LC & SC
Connectors

SEE PAGE 49
FOR LC CLIPPING
& LOCKING
OPTIONS



FIS CHEETAH SOC™

The FIS Cheetah SOC™ is the quickest pre-polished factory terminated pigtail to prepare, splice and install. The Cheetah SOC™ 27mm splice protection sleeve is encapsulated and protected by the strain relief boot eliminating the need for splice trays, chips and extra cabinets. When used with the required universal holder the SOC can be used with a variety of fusion splicers.

Each 900µm Cheetah SOC™ Includes: Connector, Cleave Protector, 900µm Boot, and Fusion Splice Sleeve.



PART #	DESCRIPTION	10pk PRICE	50pk PRICE
F1-LCAPC-SOC-X	LC/APC Singlemode, Green 900µm Boot	\$82.00	\$397.50
F1-LCUPC-SOC-X	LC/UPC Singlemode, White 900µm Boot	71.50	347.50
F1-LC62-SOC-X	LC/PC 62.5µm Multimode (OM1), Beige 900µm Boot	61.50	297.50
F1-LCOM3-SOC-X	LC/PC 50µm Multimode (OM3), Aqua 900µm Boot	61.50	297.50
F1-LCOM4-SOC-M-X	LC/PC 50µm Multimode (OM4), Magenta 900µm Boot (Magenta Housing)	71.50	297.50
F1-SCAPC-SOC-X	SC/APC Singlemode, Green 900µm Boot	82.00	397.50
F1-SCUPC-SOC-X	SC/UPC Singlemode, White 900µm Boot	71.50	347.50
F1-SC62-SOC-X	SC/PC 62.5µm Multimode (OM1), Beige 900µm Boot	61.50	297.50
F1-SCOM3-SOC-X	SC/PC 50µm Multimode (OM3), Aqua 900µm Boot	61.50	297.50
F1-SCOM4-SOC-X	SC/PC 50µm Multimode (OM4), Magenta 900µm Boot	71.50	297.50
F1-STUPC-SOC-X	ST/UPC Singlemode, White 900µm Boot	71.50	--
F1-ST62-SOC-X	ST/PC 62.5µm Multimode (OM1), Beige 900µm Boot	61.50	--
F1-STOM3-SOC-X	ST/PC 50µm Multimode (OM3), Aqua 900µm Boot	61.50	--
F1-FCAPC-SOC-X	FC/APC Singlemode, Green 900µm Boot	82.00	--
F1-FCUPC-SOC-X	FC/UPC Singlemode, White 900µm Boot	71.50	--
F1-FC62-SOC-X	FC/PC 62.5µm Multimode (OM1), Beige 900µm Boot	61.50	--
F1-FCOM3-SOC-X	FC/PC 50µm Multimode (OM3), Aqua 900µm Boot	61.50	--

*When ordering SOC's are available in 10pks and 50pks. Replace 'X' w/ "-10" for 10 pack or "-50" for 50 pack



F1-LCUPC-SOC



FIS AC7 SOC HANDHELD FUSION SPLICER KIT

FIS New AC7 Active Clad fusion splicer kit is an affordable, and effective kit for your fiber to fiber splicing needs as well as the FIS line of Cheetah and Armordillo Splice on Connectors. With a 4.3" touch screen display, improved battery life, and an all new on-board oven that can handle all 900um FIS Cheetah SOC's, the FIS AC7 will exceed your expectations while staying under your budget.

FEATURES

- Active Cladding Alignment
- Increased battery life, with 250 splice and melt cycles per charge
- IP52 Water and dust resistant
- Unsurpassed toughness, drop tested on 5 faces and 4 edges
- Built in SOC oven capable of splicing LC, SC, ST, and FC connectors

PART #	DESCRIPTION	PRICE
F1SOCAC7	FIS AC7 Fusion Splicer Kit w/FC6S+ Cleaver, Cheetah SOC Holder, Spare ER-17 Electrodes, Sheath Clamps	\$3,495.00
F1SOCAC7PRO	FIS AC7 PRO KIT Fusion Splicer Kit w/FC6S+ Cleaver, Cheetah SOC Holder, Spare ER-17 Electrodes, Sheath Clamps, 250um and 900um removable fiber holders	3,995.00



3mm / 2mm / 1.6mm FIS ARMORDILLO™ SOC

Using a factory-terminated and pre-polished connector, the Armordillo Splice-On Connector (SOC) provides a connection that meets or exceeds industry standards for loss and back reflection. The Splice-On Connector is provided with a factory-cleaved 900um fiber stub to ensure ease of use and optimal performance.

The unique 3mm and 2mm boot allows the entire splice to be concealed and protected. The addition of an extended brass crimp ring provides extra protection to the splice and utilizes the Kevlar for maximized pull strength. The Armordillo is designed to work with FIS, Fitel, AFL and Sumitomo splicers and cleavers (cordage fiber holders required). The Universal SOC Oven can shrink the inner tube in 45 seconds. Comes with custom piece of furcation for use on 1.6mm OD cable on standard boot.

- Splice-On solution for 3mm, 2mm and 1.6mm applications
- Splice protection encapsulated and protected by the extended brass crimp ring and strain relief boot
- Same ease of use as the 900um SOC

Each Armordillo SOC Includes: Extended furcation kit for use on 1.6mm OD cable, Connector, Cleave Protector, 3mm and 2mm Boot, Extended Brass Crimp Ring, and Protection Sleeve

FREE FIS AC7 SOC Splicer Kit with Purchase of 1,250 SOC Connectors

Limited time offer

PART #	DESCRIPTION	10pk PRICE	100pk PRICE
F1-LCAPC-SOC-A-X	LC/APC Singlemode, Green 3.0/2.0mm Boot	\$100.00	\$1,000.00
F1-LCUPC-SOC-A-X	LC/UPC Singlemode, White 3.0/2.0mm Boot	90.00	900.00
F1-LC62-SOC-A-X	LC/PC 62.5µm Multimode (OM1), Beige 3.0/2.0mm Boot	80.00	800.00
F1-LCOM3-SOC-A-X	LC/PC 50µm Multimode (OM3), Aqua 3.0/2.0mm Boot	80.00	800.00
F1-LCOM4M-SOC-A-X	LC/PC 50µm Multimode (OM4), Magenta 3.0/2.0mm Boot (Magenta Housing)	90.00	900.00
F1-LCOM4A-SOC-A-X	LC/PC 50µm Multimode (OM4), Aqua 3.0/2.0mm Boot (Aqua Housing)	90.00	900.00
F1-SCAPC-SOC-A-X	SC/APC Singlemode, Green 3.0/2.0mm Boot	100.00	1,000.00
F1-SCUPC-SOC-A-X	SC/UPC Singlemode, White 3.0/2.0mm Boot	90.00	900.00
F1-SC62-SOC-A-X	SC/PC 62.5µm Multimode (OM1), Beige 3.0/2.0mm Boot	80.00	800.00
F1-SCOM3-SOC-A-X	SC/PC 50µm Multimode (OM3), Aqua 3.0/2.0mm Boot	80.00	800.00
F1-SCOM4M-SOC-A-X	SC/PC 50µm Multimode (OM4), Magenta 3.0/2.0mm Boot (Magenta Housing)	90.00	900.00
F1-STUPC-SOC-A-X	ST/UPC Singlemode, White 3.0/2.0mm Boot	100.00	1,000.00
F1-ST62-SOC-A-X	ST/PC 62.5µm Multimode (OM1), Beige 3.0/2.0mm Boot	80.00	800.00
F1-STOM3-SOC-A-X	ST/PC 50µm Multimode (OM3), Aqua 3.0/2.0mm Boot	80.00	800.00
F1-FCAPC-SOC-A-X	FC/APC Singlemode, Green 3.0/2.0mm Boot	100.00	1,000.00
F1-FCUPC-SOC-A-X	FC/UPC Singlemode, White 3.0/2.0mm Boot	90.00	900.00
F1-FC62-SOC-A-X	FC/PC 62.5µm Multimode (OM1), Beige 3.0/2.0mm Boot	80.00	800.00
F1-FCOM3-SOC-A-X	FC/PC 50µm Multimode (OM3), Aqua 3.0/2.0mm Boot	80.00	800.00

*When ordering replace the "X" to specify 10= 10packs, 100= 100packs.



FIS Armordillo SOC™





AFL and FIS Splice-On Connector Compatible

90S+ Fusion Splicer

FEATURES

- Cleaver tracking and upkeep with wireless communication
- Automated wind protector, sheath clamps and splice operation
- Fiber type identification
- Loose and tight buffer with same sheath clamp
- Lithium-ion battery with 300 splices/shrinks per charge
- 5 mm cleave length for small package needs
- Multi-function transit case with integrated workstation
- Improved real-time arc control for poorly cleaved fibers



45S Fusion Splicer

FEATURES

- Simultaneous fiber preparation with patented sheath clamp design
- Sheath clamps automatically open with the wind protector
- Automatic fiber placement correction
- Active Fusion Control for arc optimization with every splice
- Active Blade Management for cleave monitoring and correction
- Easy-access battery, screen adjustments, and ergonomic adaptations
- Fully ruggedized for shock, moisture and dust resistance

AFL 90S+ SPLICER

The Fujikura 90S+ core alignment fusion splicer addresses common field issues, from splicing poor-quality legacy fiber to automated equipment maintenance. It is versatile for various applications, including bend-insensitive fibers in drop cables, long-haul terrestrial and submarine LEAF® fibers, loose buffer fiber, and splice-on connectors. Its speed and accuracy make it suitable for production and specialty environments requiring high output, tight packaging, and low loss. The 90S+ features an extended battery life of 300 splice and heat cycles, keeping you in the field longer. Its automated and user-friendly features eliminate the need for traditional tasks like frequent arc calibrations, cleaver blade rotations, cleaver usage tracking, and manual splicing operations. The redesigned work tray, cooling tray, and optional cable clamp enhance its adaptability to various work conditions.

For splicing loose buffer fiber, additional sheath clamps are unnecessary as the universal sheath clamp handles both loose and tight buffer fibers. The new Active Fusion Control (AFC) technology improves splice losses for fibers with poor cleave angles. Combined with Active Blade Management between the splicer and cleaver, the 90S+ offers robust splicing features that reduce the likelihood of poor splice installations or repairs. The 90S+ SpliceReady kit brings everything a splicer technician needs in one convenient package, saving them time and eliminating the need to source multiple components.

90S+ Fusion Splicer Kit includes: 90S+ Fusion Splicer, CT50 Cleaver, ADC-20 AC Adapter, ACC-14 AC Cord, BTR-15 Battery, ELCT2-16B Spare Electrodes (pair), Sheath Clamps, SP-03 Fiber Holder Set Plates, USB-01 Cable, Alcohol Dispenser, Splicer Carrying Strap, Quick Reference Guide, Work Tray J-Plate, SS03 Single Fiber Stripper and CC39 Transit Case with Carrying Strap

Fujikura SpliceReady 90S+ Splicer Kit includes: Fujikura 90S+ Standard Kit (S017521), FP-60 60 mm (single splice) protection sleeve (pack of 100), FCC2 fiber cleaning fluid (3 oz.), WFW wipes mini tub (90 wipes), Kevlar scissors, FH-70-900 fiber holders (pair), FH-70-250 fiber holders, Mechanical Splice Fiber Holder (250 µm), Sharpie, Splicer V-groove cleaning kit, FH-FC-900 fiber holder (900 µm cable)

PART #	DESCRIPTION	PRICE
S017521	90S+ Fusion Splicer Kit with Bluetooth	\$10,815.00
S017519	90S+ Fusion Splicer (machine only)	9,698.00
S017520	90S+ Fusion Splicer (machine only) without Bluetooth	9,698.00
S018582	SpliceReady 90S+ Splicer Kit	11,450.00

Call Your FIS Sales Representative For More Information

AFL 45S SPLICER

The 45S cladding alignment fusion splicer revolutionizes fiber splicing for small to mid-fiber count applications. It allows simultaneous preparation and loading of both fibers, using the SS-05 stripper and CT-16A cleaver adapter plate. The patented sheath clamps enable one-handed operation by allowing both fibers to be loaded simultaneously.

The 45S also features mechanically linked sheath clamps and wind protectors, speeding up sleeve positioning and transfer to the tube heater. The heater itself is faster, reducing heat time for 60 mm sleeves to ~20 seconds. These features lower the overall splicing cycle time by ~30%.

User experience is enhanced with improved fiber placement, battery access, and ergonomics. The 45S automatically corrects fiber placement errors and is easily transported due to its cube form factor. The adjustable screen reduces glare and adapts to challenging splice locations. The 45S SpliceReady kit brings everything a splicer technician needs in one convenient package, saving them time and eliminating the need to source multiple components.

45S Standard Kit with Cleaver includes: Fujikura 45S Fusion Splicer, CT-50 cleaver, SS-05 single fiber stripper, 1 pair each FH-70-250 and FH-70-900 fiber holders, SP-04 set plates, ELCT2-16B Spare Electrodes (Pair), ADC-21 AC Adapter, BTR-17 Battery Pack (installed), ACC-09 Power Cord, USB-01 USB Cable, AP-02 Alcohol Container, WT-10 work tray, ST-03 carrying case strap, TS-03 tripod screw, CC-45 Transit Case, 1 year factory warranty, and instruction manual downloaded from splicer.

Fujikura SpliceReady 45S Splicer Kit includes: Fujikura 45S Standard Kit (S018318), FP-60 60 mm (single splice) protection sleeve (pack of 100), FCC2 fiber cleaning fluid (3 oz.), AFL WFW wipes mini tub (90 wipes), One-Click Cleaner® MU/LC, One-Click Cleaner SC/FC/ST, Clamp-35B loose buffer sheath clamp, Kevlar scissors, Mechanical Splice Fiber Holder (250 µm), Sharpie pen, FH-FC-900 (900 µm cable)

PART #	DESCRIPTION	PRICE
S018318	Fujikura 45S Standard Kit	\$4,250.00
S018319	Fujikura 45S Kit without Cleaver	3,459.00
S018314	Fujikura 35S Standard Kit	3,775.00
S018316	Fujikura 35S Kit without Cleaver	3,275.00
S018581	Fujikura SpliceReady 45S Splicer Kit	\$4,655.00

WSI = Warm Splice Image WHAT IS IT?

The hot fiber glows during the arc. The core glows more brightly than the cladding due to core dopants. Low resolution optical system can "see" the core (without focus motors). Therefore, loss estimation can be based on core observation. This enables more accurate loss estimation



AFL 90R MASS FUSION SPLICER (RIBBON)

The Fujikura 90R is the mass fusion splicer workhorse of the splicing world. As data demand continues to rise, the solution to handle the increased traffic is to increase fiber counts. As a result, fiber counts being utilized in enterprise data centers, campus, and metro networks have grown enough to make single fiber splicing too costly and timely. High-density cabling made possible by SpiderWeb Ribbon® (SWR®) and others like it are spurring ribbon splicing activity in places that have traditionally used loose fiber. The 90R is the answer to these changes in splicing demand.

With automated splice start, tube heater, wind protector, cleave tracking, and blade rotations for up to 2 cleavers at a time, this splicer frees up operator time for other fiber preparation steps. With 16-fiber add-ons, the Fujikura 90R splicer enables customers to successfully splice 16-count ribbon fibers with a 200 µm pitch and size.

With the Fujikura 90R, you can keep your splicer in the field longer with field-replaceable V-grooves. When V-grooves can no longer be cleaned after extended use, or are accidentally damaged, you can resume splicing in minutes by installing the spare set included with your 90R kit.. SpliceReady kits bring everything a splicer technician needs in one convenient package, saving them time and eliminating the need to source multiple components.

90R Includes: 90R Fusion Splicer, BTR-15 Battery, CT50 Cleave Kit, RS03 Stripper Kit, SS03 Single Fiber Stripper, ADC-20 AC Adapter, ACC-14 AC Cord, ELCT2-16B Spare Electrodes (pair) with spare V-Grooves (VG12-01), FH-70-12 Fiber Holder, USB Cable, Alcohol Dispenser, Screwdriver, Splicer Carrying Strap, Quick Reference Guide, Video Instruction Manual and CC-39 Transit Case with Carrying Strap

Fujikura SpliceReady 90R Splicer Kit includes: Fujikura 90R Standard Kit (S017511), FP-05 40 mm (Ribbon-12) protection sleeve, Splicer V-groove cleaning kit, FH-70-12 Fiber holders (pair), WFW wipes mini tub (90 wipes), FCC2 fiber cleaning fluid (3 oz.), RT-02 Ribbonizing tool

Fujikura SpliceReady 90R 200 µm Splicer Kit includes: Fujikura 90R Standard Kit (S017511), FP-05 40 mm (Ribbon-12) protection sleeve, VG12-01-200 200 µm V-groove, FH-70-12PC Fiber holders for 12-fiber pitch conversion (pair), FH-70-12-200 fiber holders for 200 µm pitch ribbons (pair), RT-02 Ribbonizing tool, Splicer V-groove cleaning kit, FCC2 fiber cleaning fluid (3 oz.), WFW wipes mini tub (90 wipes)

PART #	DESCRIPTION	PRICE
S017511	90R Fusion Splicer Kit with Bluetooth (with cleaver & thermal stripper)	\$15,605.00
S017510	90R Fusion Splicer without Bluetooth (with cleaver & thermal stripper)	15,605.00
S017540	AFL Fujikura 90R Fusion Splicer w/out Bluetooth(Machine Only)	13,555.00
S018583	Fujikura SpliceReady 90R Splicer Kit	\$16,050.00
S018584	Fujikura SpliceReady 90R 200 µm Splicer Kit	\$17,495.00



90R
Fusion Splicer

FEATURES

- Cleave tracking and upkeep with wireless communication
- Automated wind protector, tube heater and splice operation
- User replaceable v-grooves
- Single to 12 fiber splicing in one machine
- 200 µm and 250 µm SpiderWeb Ribbon® universal fiber holders
- Multi-function transit case with integrated workstation

SEE
PAGE 54
FOR
PRICING

AFL SINGLE AND RIBBON FIBER HOLDER SELECTION GUIDE

Single Fiber

COATING DIAMETER OR CABLE TYPE	FIBER HOLDER	
	MODEL	IMAGE
160 µm Coating	FH-70-160	
200 Coating	FH-70-200	
250 µm Coating	FH-70-250	
500 µm Coating	FH-70-500	
Tight Buffer 900 µm Coating	FH-70-900	
Loose Buffer 900 µm with 250 µm Coating*	FH-60-LT900	
2 mm Cable with Tight Buffer 900 µm Coating	FH-FC-20	
3 mm Cable with Tight Buffer 900 µm Coating	FH-FC-30	
Flat Drop Cable with 250 µm Coating	FH-60-DC250	

*Not compatible with AFL FUSEConnect®

Ribbon Fiber

APPLICABLE RIBBON(S)	FIBER HOLDER		V-GROOVE TYPE	
	MODEL	IMAGE	MODEL	IMAGE
250 μm all types*	FH-70-2, 4, 6, 8, 10 and 12		VG12-01 (250 μm Pitch)	
Fujikura 250 μm pitch SpiderWeb Ribbon®				
Sterlite 200 μm TruRibbon™				
Corning 200 μm Flow Ribbon	FH-70-12PC			
OFS 200 μm Rollable Ribbon				
Prysmian 200 μm FlexRibbon™				
Fujikura 200 μm pitch SpiderWeb Ribbon®				
200 μm Ribbonized(any OEM)*	FH-R200-3x4			
Sumitomo 200 μm Freeform Ribbon™				
Corning 200 μm Flat Ribbon™				
200 μm all types* Except: Fujikura 250 μm pitch SpiderWeb Ribbon® and Sterlite TruRibbon	FH-70-12-200		VG12-01-200 (200 μm Pitch)	


*200 µm and 250 µm ribbonized fibers also requires the [RT-02 Ribbonizing Tool](#)



AFL Fiber Holders
S017111



AFL ELCT2-16B
Replacement Electrodes
S017103

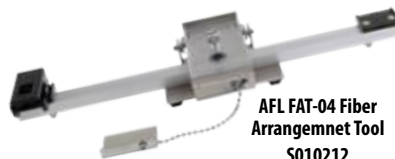

AFL FAT-04 Fiber
Arrangement Tool
S010212



FST-12 Fiber Separation Tool
S014012



AFL SPLICER ACCESSORIES



AFL Portable Splicing
Worktray
S014773



AFL Mobile Splicing
Workstation
S018625



AFL V-Groove Cleaning Kit
S014397

PART #	DESCRIPTION	PRICE
S017103	AFL ELCT2-16B Replacement Electrodes 31S/41S/90S/R (pair)	\$83.25
S013532	AFL Electrodes for 17S/18S/19S/50S/R/60S/R/70S/R (pair)	83.25
S017111	AFL FH-70-250 Fiber Holder(Pair)	273.00
S017113	FH-70-900 (900 µm jacketed fiber)	273.00
S017095	FH-70-160 (160 µm coated fiber)	273.00
S015181	FH-60-LT900 (Loose buffer 900 µm fiber)	420.00
S014397	AFL Splicer V-Groove Cleaning Kit	142.00
S017528	DCC-21 Power Cord (connects AC Adapter to power source via alligator clips)	105.00
S017527	DCC-20 Power Cord (connects AC Adapter to cigarette lighter socket)	105.00
S014773	Portable Tripod Worktray kit	562.00
S010532	ASW-02 Splicing Workstation	1,145.00
S017522	JP-10 J-Plate (Cooling tray attaches to splicer)	315.00
S014012	FST-12 Fiber Separation Tool	1,239.00
S010212	FAT-04 Fiber Arrangement Tool	504.00
S017119	AFL FH-70-12 Fiber Holder SWR (Pair)	273.00
S017513	ADC-20 AC Adapter	210.00
S014536	ACC-14 AC Power Cord	21.00
S017512	BTR-15 Battery	346.50
S014696	FH-FC-20 (900 µm within 2.0 mm sheathing) (each)	276.00
S014695	FH-FC-30 (900 µm within 3.0 mm sheathing) (pair)	276.00
S014697	FH-FC-900 (900 µm cable) (each)	73.00
S014705	CLAMP-FC-2000 (pair)	16.80
S014704	CLAMP-FC-3000 (pair)	9.00
S015915	AFL FP-60 Protection Sleeve (60mm)	0.30¢
S015916	AFL FP-40 Protection Sleeve (40mm)	0.30¢
S017010	AD-50 Adapter Plate	52.50
S015862	AFL S70D Sheath Clamp (Loose tube)	147.00
S016853	AFL S21B Sheath Clamp (Loose tube)	147.00
S012996	One Year Extended Warranty (splicer specific)	Please call for pricing
S013000	Two Year Extended Warranty (splicer specific)	Please call for pricing
S017711	FH-70-200 (200 µm single fiber)	273.00
S018610	FH-70-16-200 Fiber Holder for 200µm pitch ribbons	273.00
S018611	FH-70-16PC Fiber Holder for 16 fibers pitch conversion	714.00
S018612	VG16-01-200 16 Fiber V-Groove for 200um pitch	945.00
S014753	Portable Splicing Worktray	306.50
S018625	AFL Mobile Splicing Workstation	295.00

STAY COMPLIANT WITH INDUSTRY STANDARDS BY TAKING ADVANTAGE OF OUR FULL SERVICE CALIBRATION LAB.



All Verifications come with the following Service Features

- NIST traceable calibration
- Verification of conformance with the manufacturer's specification
- Ensure correct operation and performance
- All calibration and/or verification services include a NIST traceable calibration certificate

FOR MORE
INFORMATION
SEE PAGE 167



Visit us on our website at www.fiberinstrumentsales.com/calibration/

AFL 3mm and 2mm FUSEConnect® Versions Available

AFL FUSEConnect® 900µm / 2.0mm / 3.0mm

FUSEConnect® utilizes a fusion splicer to terminate a connector in the field, addressing return loss concerns present in analog optical networks. This advanced process yields true APC performance of >65dB return loss in an SC/APC configuration. Designed to work with an industry standard 10mm cleave length and splicers utilizing a fiber holder system, FuseConnect is compatible not only with Fujikura's fusion splicers, but also with most other industry available, fiber holder-based fusion splicing platforms. MPO Splice-On Connectors Available.



PART #	DESCRIPTION	PRICE - 6pack
FUSE-SC9SMU-6	AFL FuseConnect SC UPC SM 900um Blue (6pk)	\$75.00
FUSE-SC9SMA-6	AFL FuseConnect SC APC SM 900um Green (6pk)	75.00
FUSE-SC9M62-6	AFL FuseConnect SC PC MM 62.5um 900um Beige (6pk)	75.00
FUSE-SC9M50L-6	AFL FuseConnect SC MM 50um 10GIG OM3 900um Aqua (6pk)	70.15
FUSE-LC9SMU-6	AFL FuseConnect LC UPC SM 900um Blue (6pk)	75.00
FUSE-LC9SMA-6	AFL FuseConnect LC APC SM 900um Green (6pk)	75.00
FUSE-LC9M62-6	AFL FuseConnect LC PC MM 62.5um 900um Beige (6pk)	74.50
FUSE-LC9M50L-6	AFL FuseConnect LC MM 50um 10GIG OM3 900um Aqua (6pk)	74.50
FUSE-ST9SMU-6	AFL FuseConnect ST UPC SM 900um Blue (6pk)	87.25
FUSE-ST9M62-6	AFL FuseConnect ST PC MM 62.5um 900um Beige (6pk)	88.25
FUSE-ST9M50L-6	AFL FuseConnect ST MM 50um 10GIG OM3 900um Aqua (6pk)	99.95
FUSE-SC3SMA-6	SM, SC/APC, 3mm boot, Green	91.25
FUSE-SC3SMU-6	SM, SC/UPC, 3mm boot, Blue	90.55
FUSE-SC3M62-6	MM, 62.5µm, SC, 3mm boot, Beige	85.00
FUSE-SC3M50L-6	MM, 50µm, 10GIG, SC, 3mm boot, Aqua	85.00
FUSE-LC2SMA-6	SM, LC/APC, 2mm boot, Green	87.25
FUSE-LC2SMU-6	SM, LC/UPC, 2mm boot, Blue	88.95
FUSE-LC2M62-6	MM, 62.5µm, LC, 2mm boot, Beige	87.25
FUSE-LC2M50L-6	MM, 50µm, 10GIG, LC, 2mm boot, Aqua	87.25
FUSEMPO-SSMA-3-M-6	Singlemode (OS1), MPO Male (pins) for 3.0mm round boot	825.00
FUSEMPO-SSMA-3-F-6	Singlemode (OS1) MPO Female (No Pins) for 3.0mm round boot	775.00
FUSEMPO-SOM4-3-M-6	Multimode 50 µm 10Gig (OM3/4) MPO, Male (pins) for 3.0mm round boot	800.00
FUSEMPO-SOM4-3-F-6	Multimode 50 µm 10Gig (OM3/4) MPO, Female (no pins) for 3.0mm round boot	720.00
FUSEMPO-TL-KT	FUSEConnect MPO Tool Kit	524.60
FUSE-TL-KT	FuseConnect Toolkit	1,219.99

NOTE: Use AFL Splicers with Fiber Holders for FUSEConnect® and Installation kit is recommended for best performance



SUMITOMO ELECTRIC 3mm and 2mm Lynx-CustomFit™ Versions Available

SUMITOMO ELECTRIC LYNX-CUSTOMFIT™

With SEL's Lynx-CustomFit™ Splice-On Connectors, users can quickly and easily complete permanent field terminations without the excess slack, shorts, and logistic delays of pre-terminated cables, or the need for splice trays that would be needed with pigtail assemblies. Pre-cleaned and cleaved fiber stubs in hermetically sealed trays eliminate the need for stripping and cleaving the ferrule stub in the field, making the process faster and easier. A patented ferrule hub design along with carefully manufactured Sumitomo Electric splice sleeves combine to ensure high quality, low loss splices every time.

When needed, cordage versions require no crimping, yet meet the same mechanical performance industry standards as factory installed connectors. After installation, the appearance is nearly identical to factory terminated connectors, and matches them in performance. Widely recognized for their first-class performance, Lynx-CustomFit™ Splice-On Connectors can successfully mate with any standard connectors in an existing network and perform well for many years to come.

PART #	DESCRIPTION	PRICE
LYNX3-LCUPC-SM-250900	Lynx-CustomFit™, LC, UPC, SM, 250um & 900um	\$10.11
LYNX3-LCPC-OM3-250900	Lynx-CustomFit™, LC, PC, OM3, 250um & 900um	10.11
LYNX3-LCAPC-SM-250900	Lynx-CustomFit™, LC, APC, SM, 250um & 900um	11.27
LYNX3-SCUPC-SM-250900	Lynx-CustomFit™, SC, UPC, SM, 250um & 900um	10.11
LYNX3-SCAPC-SM-250900	Lynx-CustomFit™, SC, APC, SM, 250um & 900um	11.03
LYNX3-SCPC-OM3-250900	Lynx-CustomFit™, SC, PC, OM3, 250um & 900um	10.11
LYNX3-SCPC-OM1-250900	Lynx-CustomFit™, SC, PC, OM1, 250um & 900um	10.75
LYNX3-STUPC-SM-250900	Lynx-CustomFit™, ST, UPC, SM, 250um & 900um	12.44
LYNX3-STPC-OM3-250900	Lynx-CustomFit™, ST, PC, OM3, 250um & 900um	12.44
LYNX3-STPC-OM1-250900	Lynx-CustomFit™, ST, PC, OM1, 250um & 900um	12.44
LYNX2-TKU-MPO-RCATK	Tool Kit for terminating Lynx2 MPO Round Cord Connectors	1,579.00
FA-03	Fiber Arrangement Tool for Lynx2 MPO	795.00
FAC-24	Consumables for Fiber Arrangement Tool	22.50
FAC-24-003-A	Adhesive for Fiber Arrangement Tool (Included in FAC-24)	9.50
LYNX2-MPO12F-MM03-RBN	LYNX2 MPO 12ct. Female, MMF OM3, Ribbon	70.65
LYNX2-MPO12F-MM03-RC3.0	LYNX2 MPO 12ct. Female, MMF OM3, Round Cord 3.0	73.00
LYNX2-MPO12F-SMSL-RBN	LYNX2 MPO 12ct. Female, SMF Standard Loss, Ribbon	70.65
LYNX2-MPO12F-SMSL-RC3.0	LYNX2 MPO 12ct. Female, SMF Standard Loss, Round Cord 3.0	73.00
LYNX2-MPO12M-MM03-RBC	LYNX2 MPO 12ct. Male, MMF OM3, Oval Jacket	79.00
LYNX2-MPO12M-MM03-RBN	LYNX2 MPO 12ct. Male, MMF OM3, Ribbon	78.00
LYNX2-MPO12M-SMSL-RBN	LYNX2 MPO 12ct. Male, SMF Standard Loss, Ribbon	75.00
LYNX2-MPO12M-SMSL-RC3.0	LYNX2 MPO 12ct. Male, SMF Standard Loss, Round Cord 3.0	77.28



MPO Splice-On Connectors Available.



Sumitomo /
FIS Splice-On
Connector
Compatible



Q102CA+



Q102M12+

SUMITOMO ELECTRIC Q102-CA+ QUANTUM FUSION SPLICER KIT

The Quantum Q102-CA+™ is Sumitomo Electric Lightwave's next generation of the industry leading Quantum core alignment fusion splicers, redesigned from the ground up to redefine the industry standard in optical fiber core alignment fusion technology. Maintaining all of the qualities and industry first features of the Quantum Q101-CA, the Q102-CA+ continues to raise the bar in performance by still being the fastest splicer with blazing fast 5 second splice and 9 second sleeve heating times. These new speeds, coupled with the splicer's patent protected dual independent ovens, makes it the fastest in the industry by far. The built-in dual heater system, with its unprecedented speed, improves splicing efficiency by over 80% for perfectly streamlined, consecutive, and cost effective splices.

FEATURES

- Patented NanoTune™ technology offers an enhanced splicing experience
- Extended battery life capable of 320 splice/burn cycles
- High Speed Dual Independent Heaters
- Compatible with FIS Splice-On Connectors

PART #	DESCRIPTION	PRICE
TYPE-Q102-CAP-KIT-6SCP	TYPE Q102-CA+ Quantum Fusion Splicer Kit includes Precision Cleaver w/ Auto Rotating Blade (FC-6R+), Fiber Stripper (JR-M03), One Pack of Fiber Protection Sleeves, Shipping Case, one set of Spare Electrodes (ER-10), AC Interface/Battery Charger with Power Cord, Battery Unit (BU-102)	\$11,089.00
TYPE-Q102-CAP-KIT-6RSCPFH	TYPE Q102-CA+ Quantum Fusion Splicer Kit includes 250um, 900um and Loose Buffer Fiber Holders, Precision Cleaver w/ Auto Rotating Blade (FC-6R+), Fiber Stripper (JR-M03), One Pack of Fiber Protection Sleeves, Shipping Case, one set of Spare Electrodes (ER-10), AC Interface/Battery Charger with Power Cord, Battery Unit (BU-102)	11,583.00
TYPE-Q102-CAP-KIT-8R	TYPE Q102-CA+ Quantum Fusion Splicer Kit includes Precision Hand Held Cleaver w/ Auto Rotating Blade (FC-8R), Fiber Stripper (JR-M03), One Pack of Fiber Protection Sleeves, Shipping Case, one set of Spare Electrodes (ER-10), AC Interface/Battery Charger with Power Cord, Battery Unit (BU-102)	11,089.00
TYPE-Q102-CAP-KIT-8RFH	TYPE Q102-CA+ Quantum Fusion Splicer Kit includes 250um, 900um and Loose Buffer Fiber Holders, Precision Hand Held Cleaver w/ Auto Rotating Blade (FC-8R), Fiber Stripper (JR-M03), One Pack of Fiber Protection Sleeves, Shipping Case, one set of Spare Electrodes (ER-10), AC Interface/Battery Charger with Power Cord, Battery Unit (BU-102)	11,562.00

SUMITOMO ELECTRIC Q102M12+ QUANTUM COMPACT MASS FUSION SPLICER KIT

Sumitomo Electric's Q102-M12+ is accompanied with new features and benefits capable of deploying next generation hyperscale networks.

Consistent and quality low-loss splicing, the compatibility with Lynx Custom-Fit® Splice-On Connectors, and Sumitomo Electric's patented dual independent ovens make this fusion splicer a preferred choice for extensive and diverse optical fiber networks. The new ribbon fiber splicer is capable of handling 250um and 200um ecosystems and is accompanied by SEL's 24/7 fusion splicer technical support and a three-year warranty

FEATURES

- AI-powered, NanoTune™ for ribbon splicing
- Better fiber alignment with Active Cladding Alignment System
- Patented coatings on V-grooves and lens
- Versatile, replaceable V-grooves

PART #	DESCRIPTION	PRICE
TYPE-Q102-M12P-KIT-6RP1	Quantum Q102-M12+ Ribbon Fiber Splicer Kit with Dual Built-in Heat Shrink Ovens includes: Shipping Case, one set of Spare Electrodes (ER-10), Cooling Tray, AC Interface/Battery Charger with Power Cord, Battery Unit (BU-102), Fiber Protection Sleeves (FPS-6), V-groove Cleaning Brush(VGB-004), Cleaning Kit (FUS-CLN- KIT)	\$14,969.55

Compatible with
Sumitomo & FIS
Splice-On Connectors

SUMITOMO ELECTRIC ACCESSORIES

PART #	DESCRIPTION	PRICE
ER-17	Sumitomo Electric Replacement Electrodes for Q502 fusion splicer	\$75.00
ER10	Sumitomo Electric Electrodes for Sumitomo Splicer (Pair)	75.00
ER11	Sumitomo Electric Electrode for QH201e Splicer (Pair)	75.00
FHS09	Sumitomo Electric Fiber Holders for 900um Single Fiber (Pair)	300.00
FHS025	Sumitomo Electric Fiber Holder for 250um Single Fiber (Pair)	300.00
FHS025LB5L	Sumitomo Electric Fiber Holder for 900um LT Fiber. Left side	250.00

SUMITOMO ELECTRIC Q502S ACTIVE CLAD ALIGNMENT FUSION SPLICER

With new features and new technologies, the Q502S fusion splicer offers improved performance, reliability, and user experience. The Q502S series maintains Sumitomo Electric's industry-leading features, including a world-class light and compact frame, quick splicing, and environmental durability.

FEATURES

- **NanoTune™** : The Q502S is powered by NanoTune™ AI technology, which greatly improves splicing efficiency and accuracy regardless of operational condition and user skill.
- **Hot Core Analyzing** : The Q502S provides accurate estimated loss by analyzing the fiber image through high-quality microscopes during splicing.
- **Detection of MMF and SMF fiber types** : As a world first, the Q502S introduces a fiber type detection function – allowing the Q502S to distinguish between MMF and SMF fiber types and ensure use of the correct splice program

PART #	DESCRIPTION	PRICE
TYPE-Q502S-KIT-2HP	TYPE-Q502S Quantum Fusion Splicer Kit includes Fiber Cleaver (FC-6S+), 250um and 900um Fiber Holders, Fiber Stripper (JR-M03), One Pack of Fiber Protection Sleeves, Hard Shipping Case, one set of Spare Electrodes (ER-17), AC Interface/Battery Charger with Power Cord, Battery Unit (BU-17), Cleaning Kit (FUS-CLN-KIT)	\$3,579.00
TYPE-Q502S-KIT-8RH	TYPE-Q502S Quantum Fusion Splicer Kit includes 250um and 900um Fiber Holders, Precision Cleaver w/ Auto Rotating Blade (FC-8R), Fiber Stripper (JR-M03), One Pack of Fiber Protection Sleeves, Hard Shipping Case, set of Spare Electrodes (ER-17), AC Interface/Battery Charger with Power Cord, Battery Unit (BU-17), Cleaning Kit (FUS-CLN-KIT)	\$3,946.00

SUMITOMO ELECTRIC T-56+ FUSION SPLICE KIT W/ AUTO PRECISION CLEAVER

PART #	DESCRIPTION	PRICE
TYPE-56P-CA-KIT-6RSCP	TYPE-56+ Fusion Splicer Kit includes: FC-6R+ Precision Auto Rotating Cleaver, Fiber Stripper (JR-M03), One Pack of Fiber Protection Sleeves, Shipping Case, one set of Spare Electrodes (ER-10), AC Interface/Battery Charger with Power Cord, Battery Unit (BU-101)	\$7,265.00
TYPE-56P-CA-KIT-8R	TYPE-56+ Fusion Splicer Kit includes: FC-8R Precision Auto Rotating Cleaver, Fiber Stripper (JR-M03), One Pack of Fiber Protection Sleeves, Shipping Case, one set of Spare Electrodes (ER-10), AC Interface/Battery Charger with Power Cord, Battery Unit (BU-101)	7,265.00

SUMITOMO ELECTRIC LIGHTWAVE



Q502S

Sumitomo / FIS Splice-On Connector Compatible



T-56+

SUMITOMO SINGLE AND RIBBON FIBER HOLDER SELECTION GUIDE

SINGLE FIBER

HOLDER	DESCRIPTION	IMAGE
FHS-025	250um Fiber Holders (pair)	
FHS-025-LB5-SET	Holder, 250um, Loose Buffer, SET	
FHS-09	900um Fiber Holders (pair)	
FHS-200	200um Single Fiber Holders (pair)	
FHC-3	Holder for 3 mm cord (Only left side holder)	
FHD-1	Single 2mm Square drop cable holders	

RIBBON FIBER

HOLDER	DESCRIPTION	APPLICABLE RIBBONS	IMAGE
PCH-12A	200 to 250um Pitch conversion for Sumitomo Electric Freeform Ribbon® Fiber	Sumitomo Electric 200um and 250um Freeform Ribbon® Corning 200um Standard Ribbon	
PCH-12V	200 to 250um Pitch Conversion Dedicated for partially bonded ribbon fiber	Sumitomo Electric 200um and 250um Freeform Ribbon® OFS 200um and 250um Rollable Ribbon Prysmian Group 200um and 250um FlexRibbon™	
FHM-12N	12-Fiber 200um Ribbon Holders (pair)	Sumitomo Electric 200um Freeform Ribbon® OFS 200um Rollable Ribbon Prysmian 200um FlexRibbon™ Corning 200um Standard Ribbon	
FHM-12V	12-Fiber Ribbon Holders (pair)	250um All Types Standard Ribbon Fujikura 200um and 250um SpiderWeb Ribbon® Sumitomo Electric 250um Freeform Ribbon® OFS 250um Rollable Ribbon Prysmian 250um FlexRibbon™	
FHM-4	4-Fiber Ribbon Holders (pair)	All Ribbon Fibers	
FHM-6	6-Fiber Ribbon Holders (pair)	All Ribbon Fibers	
FHM-8	8-Fiber Ribbon Holders (pair)	All Ribbon Fibers	

FITEL®



**S179+
Fusion Splicer**

**FITEL / FIS
Splice-On
Connector
Compatible**

FITEL S179+ SPLICER

The powerful FITEL S179+ Hand-Held, Core Alignment Fusion Splicer delivers fast and reliable optical fiber splicing even under harsh environmental conditions. Offering a wide range of capabilities, this fusion splicing machine opens the door to an entirely new range of applications.

FEATURES

- NEW automatic ARC compensations
- Dynamically optimizing ARC conditions to achieve best arc conditions.
- Adaptively adjusting ARC conditions to handle poor cleaving angle situations
- NEW precise loss estimations
- Improved accuracy of loss estimation at high splice loss region
- **Perfect for use with Splice-On Connectors**

S179+ Extended Kit Includes: (S179P-EX-900) S179+ Main Body, 250µm and 900µm Fiber Holders, AC Adapter for S179+, Spare Electrodes, Hard Carrying Case, Cleaning Brush, Electrode Cleaning Disc, Fiber Stripper, Two Batteries, Cleaning Fluid, Fiber Wipes and User Manual.

PART #	DESCRIPTION	PRICE
S179P-EX-10V2	Extended Kit with 10mm Clamps	\$9,300.00
S179P-EX-900V2	Extended Kit with 250µm and 900µm Fiber Holders	9,480.00
F1-SOCSLAF2	Cheetah Splice-On Connector Holder	100.00

FITEL®



**S124X
Fusion Splicer**

FITEL S124X

The powerful FITEL S124X Hand-Held Ribbon Fusion Splicer delivers fast and reliable optical splicing for up to 200 µm 16-fiber pitched ribbons even under rigorous environmental conditions. The S124X combines multiple functions into one machine, offering a wider range of capabilities that unites innovative technology, cost savings and opens the door to an entirely new range of applications.


FEATURES

- Easily exchangeable fiber guide V-grooves
- Capable of handling Up to 16-fiber 200 µm ribbon splicing
- Suited for both 250 µm and 200 µm pitch 12-fiber ribbons Splicing
- 15-second-high speed splicing operation
- Simple operation with touch panel and GUI
- 3 Bright LED's to illuminate the operation area
- Wi-Fi connectivity for smartphone data management and control

S124X Standard Kit Includes: S124X Main Body (including Battery, Hard Carrying Case, Spare Electrodes, AC Adapter, AC Cord, Electrode Sharpener, Cleaning Brush, User Manual, 250µm 12 fiber v-groove, S712A-12 - 12 Fiber Holder and Thermal Ribbon Stripper.

PART #	DESCRIPTION	PRICE
S124XKIT	S124M12 Standard Kit	\$13,780.00
S712S-250	Fiber holder (0.25mm coating fiber) 1 pair	300.00
S712S-900	Fiber holder (0.90mm coating fiber) 1 pair	300.00
S712A-002	Fiber holder (2 fiber ribbon) 1 pair	450.00
S712A-004e	Fiber holder (4 fiber ribbon) 1 pair	450.00
S712A-006	Fiber holder (6 fiber ribbon) 1 pair	600.00
S712A-008	Fiber holder (8 fiber ribbon) 1 pair	450.00
S712A-12	Fiber holder (12 fiber ribbon) 1 pair	450.00

FIS

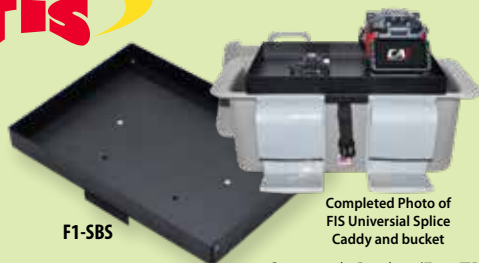

F1-SBS

Completed Photo of
FIS Universal Splice
Caddy and bucket

Optional : Bucket (F1-1TBSC)

FIS UNIVERSAL SPLICE CADDY

The FIS Universal Splice Caddy is designed to securely fasten any fusion splicer and cleaver for aerial splice jobs. The Universal Splice Caddy easily attaches to FIS' Tool Bucket(F1-1TBSC) which provides technicians with a stable workstation for easy cable transition to both the cleaver and splicer. **Compatible with the FIS, FITEL, AFL and Sumitomo fusion splicers and cleavers.** **Kit Contents:** (1) FIS Universal Splice Caddy (F1-SBS), (2) Plugs included to cover open screw holes, (2) 16mm L Thumb Screw, (1) 8mm L Thumb Screw, (1) Accessory tray (For fiber optic cleaning solution and tools)

PART #	DESCRIPTION	PRICE
F1-SBS	Aerial Fusion Splicer Workstation (Fits up to 3" Bucket Lip)	\$100.00
F1-1TBSC	Workstation Bucket	230.00

FIS BUCKET BUDDY

Technicians are faced with the challenge of securing the splicer or test equipment in a manner that facilitates a safe and easy fiber optic splice. The Bucket Buddy is unique in that its shape allows it to easily slide over the "lip" of the bucket on basically any aerial bucket truck. It will remain in place, attached securely to the bucket itself, to provide technicians a workstation attached to the bucket where they can perform fiber splices, tests, or terminate drops.

F1-AERIALBB

PART #	DESCRIPTION	PRICE
F1-AERIALBB	Aerial Fusion Splicer Workstation (Fits up to 3" Bucket Lip)	\$585.00

FITEL NINJA SPLICER

The FITEL NINJA NJ001 Hand-Held Single Fiber Fusion Splicer is applicable for all METRO, LAN and FTTx fibers including ultra bend-insensitive fibers. With its low-profile, compact, ruggedized body, the NJ001 offers reliable splicing under severe environmental conditions. The large battery capacity makes it possible to perform 100 cycles of splicing and heating. Combining portability, power flexibility and field ruggedness, the NJ001 delivers fast and consistent splicing with outstanding mobility and maximum ease of use.

FEATURES

- 3 LED Lamps
- Easy maintenance
- 100 cycles (Splicing and Heating)
- Ruggedized design
- PC interface software
- Powerful, high-propulsion motor (8N) for stable splicing
- Internal battery charging
- Auto-start function
- Perfect for use with Splice-On Connectors

NJ001 Standard Kit Includes: NJ001 Main Body including Battery, Hard Carrying Case, Spare Electrodes, AC Adapter, AC Cord, Electrode Sharpener, Cleaning Brush, User Manual, Cheetah SOC Holder and Quick Reference Guide (the packaged quick reference guide depends on the holder type)

PART #	DESCRIPTION	PRICE
NJ001-3-EX-10-V2	Extended Kit with 10mm Clamps	\$3,360.00
NJ001-3-EX-900-V2	Extended Kit with 250µm and 900µm Fiber Holders	3,360.00
F1-SOCSLAF2	Cheetah Splice-On Connector Holder	100.00

FITEL S154-AC SPLICER

With a proven chassis design, the FITEL S154-AC Hand-Held Fusion Splicer provides a robust, fast, and reliable splicing solution for FTTx, Splice-On-Connectors (SOCs), data centers, and Metro applications. A broad range of new features that enhance communication, ease of use, portability, and field durability make the S154-AC Fusion Splicer one of the most powerful and user-friendly fusion splicing machines available today.

FEATURES

- Robust performance with greater uptime
- Compatible with various types of Splice-On-Connectors (SOCs)
- Fast and reliable fiber splicing for exceptional performance (splicing 6 sec / splice loss 0.03 dB)
- Easy to interface 4.3-inch-wide touch screen for fast, intuitive operation
- Removeable V-Groove enabling easy field maintenance and lens cleaning, for greater uptime
- Tough environments tolerance (IP52, IK07)

S154-AC Extended Kit Includes: S154-AC Main Body, 250µm and 900µm Fiber Holders, AC Adapter for S154-AC, Spare Electrodes, Hard Carrying Case, Cleaning Brush, Electrode Cleaning Disc, Fiber Stripper, Cleaning Fluid, Fiber Wipes and User Manual.

PART #	DESCRIPTION	PRICE
S154-AC-VK-900	S154-AC with S317 standard package	\$3,235.00
S712T-010	Tight Holder 10 mm Cleave Length	\$300.00
S712T-016	Tight Holder 16 mm Cleave Length	300.00
S712T-UN	Tight Holder Universal	300.00
S712S-500	Fiber Holder for 500 µm coating	300.00

FITEL EZIFUSE

OFS's new Splice On Connector termination system allows for easy termination and flexibility in the field. This new "splice-on" connector (SOC) eliminates the need for field polishing and significantly improves the quality of the termination and installation time required. The connector is easily assembled by using a process that requires minimal skill or training. These connectors are optimal for use in FTTx applications. Both UPC and APC polish are available for single-mode fiber. EZ!Fuse Splice On Connector is compatible with the Fitel Fusion Splicer models Ninja, S179 and S154-AC.

2mm/3mm (only available in 10-packs)

PART #	DESCRIPTION	PRICE
FSOC-SC09-SM-U	SC/UPC SM SOC 900um (10 pack)	94.00 / 10pk.
FSOC-SC23-SM-U	SC/UPC SM SOC 2.0mm/3.0mm (10 pack)	108.00 / 10pk.
FSOC-SC09-SM-A	SC/APC SM SOC 900um (10 pack)	94.00 / 10pk.
FSOC-SC23-SM-A	SC/APC SM SOC 2.0mm/3.0mm (10 pack)	108.00 / 10pk.
FSOC-SC09-M3-P	SC/PC OM3 MM SOC 900um (10 pack)	94.00 / 10pk.
FSOC-SC23-M3-P	SC/PC OM3 MM SOC 2.0mm/3.0mm (10 pack)	108.00 / 10pk.
FSOC-SC09-M1-P	SC/PC OM1 MM SOC 900um (10 pack)	94.00 / 10pk.
FSOC-SC23-M1-P	SC/PC OM1 MM SOC 2.0mm/3.0mm (10 pack)	108.00 / 10pk.
FSOC-LC09-SM-U	LC/UPC SM SOC 900um (10 pack)	102.00 / 10pk.
FSOC-LC20-SM-U	LC/UPC SM SOC 2.0mm (10 pack)	118.00 / 10pk.
FSOC-LC09-SM-A	LC/APC SM SOC 900um (10 pack)	102.00 / 10pk.
FSOC-LC20-SM-A	LC/APC SM SOC 2.0mm (10 pack)	118.00 / 10pk.
FSOC-LC09-M3-P	LC/PC OM3 MM SOC 900um (10 pack)	102.00 / 10pk.
FSOC-LC20-M3-P	LC/PC OM3 MM SOC 2.0mm (10 pack)	118.00 / 10pk.
FSOC-LC09-M1-P	LC/PC OM1 MM SOC 900um (10 pack)	118.00 / 10pk.
FSOC-LC20-M1-P	LC/PC OM1 MM SOC 2.0mm (10 pack)	118.00 / 10pk.



**NJ001
Fusion Splicer**

**FITEL / FIS
Splice-On
Connector
Compatible**



**S154-AC
Fusion Splicer**

**FITEL / FIS
Splice-On
Connector
Compatible**

FEATURES

- Simple, Fast, and Consistent Field Termination
- Applicable for Interconnection Needing High Reliability
- Complies with Telcordia GR-326-CORE





F1-LYNX



F1-LYNX2000



F1-LYNX3000



CT-16



CT-50

FIS LYNX™ PRECISION CLEAVER

The LYNX provides clean, accurate cleaves required for fusion splicing. LYNX is also ideal for preparing fiber for quick-term style connectors such as Bobtails, UNICAMS and other pre-polished connectors. LYNX features a cleave angle of 90 degrees +/- 0.5 degrees. Its 16-position blade provides approximately 48,000 cleaves. LYNX cleaves single fibers (250-900µm). The LYNX Precision Cleaver can be used alone or mounted to an optional work tray that includes a goose neck LED (F1LYNXBASE).

PART #	DESCRIPTION	PRICE
F1-LYNX	LYNX Precision Cleaver - 3 Step Precision Cleaver	\$595.00
F1-LYNX2000	LYNX One-Step Deluxe Lynx Cleaver	750.00
F1-LYNX3000	LYNX One-Step Premium cleaver with Auto-Rotating blade	920.00
F1-LYNXBLADE	LYNX Replacement Blade - FIS LYNX & LYNX2000 Cleavers	95.00
F1LYNXBASE	LYNX Cleaver Work Tray With Gooseneck LED Light	69.95
F1-LYNXBLADE	LYNX3000 Replacement Cleaver Blade	148.00

AFL CLEAVERS

The CT-50 Cleaver sets the standard for portability, reliability and ease of use. Available for either single fiber or ribbon splicing (up to 12 fiber ribbons) applications. The CT16 fiber cleaver from Fujikura was designed for FTTH or other space constrained applications where ergonomics and durability are key. The 16-position blade in each cleaver offers long life and performs cleaving in one single step. Each cleaver comes installed with a fixed adapter plate to hold your 250µm and 900µm fiber, with an additional AD-10-M24 fixed adapter plate needed for ribbon fiber (CT-50 only).

PART #	DESCRIPTION	PRICE
S017030	CT-50 Cleaver, Single & up to 12 Fiber Ribbon	\$1,176.00
S018330	CT-16 Cleaver, Single Fiber	693.00
S018335	Replacement Blade for CT-16 Cleaver	94.50
S017076	Replacement Blade for CT-50 Cleaver	105.00
S017010	AD-50 Adapter Plate for both CT-16 and CT-50 (Single Fiber)	52.50
S017335	AD-10-M24 Fiber Plate for CT50 (Ribbon Fiber Cleaving)	84.00

FITEL PRECISION CLEAVER

The Fitel S327 is an ergonomically designed cleaver suitable for a variety of Telecom and Production applications. This one-action cleaver ensures seamless and repeatable cleaving for both single and ribbon fiber. Notably, it boasts an impressive capability of 65,000 cleaves, making it a reliable choice for various professionals. The S327 offers the longest blade life in the market, ensuring durability and cost-effectiveness. Blade replacement is a breeze, taking just 1 minute and requiring no special tools or additional adjustments. Whether you prefer handheld operation or the traditional desktop setup, the S327 accommodates both. The cleaved fiber ends are automatically collected in the waste bin, streamlining your workflow.

PART #	DESCRIPTION	PRICE
S327A	S327A Cleaver, Single & up to 12 Fiber Ribbon	\$680.00
S327X-24	Replacement Blade	125.00
S327X-18	Single Fiber Adapter	55.00
S327X-12	Normal Fiber Waste Bin	8.50

SUMITOMO ELECTRIC PRECISION CLEAVERS

With the introduction of the FC-6R+, you now can have the ultimate precision tool for your single and mass/multiple fiber cleaving with an auto rotating blade. As part of the FC-6+ family of precision fiber cleavers, it is a simple 1- Step operation for the user to remove or install the single fiber adapter and alternate between mass and single fiber cleaving. The FC-8R is Sumitomo Electric Lightwave's 1-Step optical fiber cleaver with automatic blade rotation and a digital cleave counter. It is the ideal tool for use in fusion splicing, field termination, or any application that requires precision in a confined space. It has a simple cleaving operation that can be performed in the palm of the hand, allowing the user to take the cleaver to fiber in limited slack or cramped applications. A built-in extra large fiber scrap collector handles scrap fibers resulting from the cleaving process.

PART #	DESCRIPTION	PRICE
FC-6S+	Sumitomo Precision Optical Fiber Cleaver for single fiber cleaving with adjusting cleaver blade & fiber catcher	\$895.00
FC-6R+	Sumitomo Precision Optical Fiber Cleaver for single & mass fiber cleaving w/auto rotating/adjusting cleaver blade & fiber catcher	1,350.00
FC-8R	Sumitomo Precision Optical Fiber Cleaver for single & mass fiber cleaving w/auto rotating/adjusting cleaver blade & fiber catcher	1,350.00
FCP7RBL	Sumitomo Replacement Blade for FC8R/7R/6R Auto-Rotating Models	120.00
FCPBL	Sumitomo Replacement Blade for FC6S/FCP Style Cleavers	105.00



S327A



FC-6R+



FC-8R

AFL THERMAL STRIPPERS

The RS01, RS02, RS03 and RS03-80 Thermal Strippers provide superior stripping performance for both single and multi-fiber stripping. The fast heating time of 3 seconds speeds productivity. The ergonomic design, combined with the low level of force needed for stripping, makes the RS series comfortable and easy to use for high fiber count applications. The strippers are also capable of stripping 200 µm coated fibers and ribbons. An audible beep and illuminated LED signal indicate that the proper heating temperature has been reached. A temperature selection switch permits easy field optimization for different fibers or operating conditions. These strippers accept all Fujikura field and factory style fiber holders. Bluetooth® capabilities on the RS02 and RS03 models provide a convenient way to program the stripper for user preferences via an Android or iOS smartphone app. The RS03 model includes a powerful Lithium-Ion battery that delivers enough power for 600 stripping cycles. The RS03-80 is offered for stripping 80 µm cladding fiber applications.

PART #	DESCRIPTION	PRICE
S018613	AFL Precision Strip 125/900 Kit for Single Fiber Applications	\$255.00
S016815	RS01 Thermal Stripper, Strips 200um to 400um coatings	735.00
S016816	RS02 Thermal Stripper, Strips 200um to 400um coatings, Bluetooth Capable (no extra charge)	735.00
S016817	RS03 Thermal Stripper, Strips 200um to 400um coatings, Bluetooth Capable, Rechargeable Lithium-Ion Battery	1,155.00
S016820	ADC-09A AC Adapter for RS Series strippers	105.00
S014390	ACC-09 Power Cord	23.75
S016832	BTR-12 Battery	126.00

FITEL HOT JACKET RIBBON STRIPPER

The Fitel Hot Ribbon Stripper applies controlled heat to fibers/ribbons during stripping to reduce stripping force required and prevent fiber damage. Heats up in 13 sec. Includes Batteries, AC/DC Adapter. Fiber Holders not included.

PART #	DESCRIPTION	PRICE
S218-R-PLUS	Fitel Hot Ribbon Stripper (fiber holders not included) (250um flat and Rollable Ribbon fiber)	\$1,500.00
S218R-200-V2	Fitel Hot Ribbon Stripper (fiber holders not included) (250um and 200um Rollable Ribbon fiber)	1,600.00

SUMITOMO ELECTRIC JR-7 THERMAL JACKET REMOVER

The JR-7 includes a new ergonomic design with a tough metal lid for durability, vibration-ready notification, LED light for dark environments, a wide and flat stage for easy setting and cleaning, power save and auto power off functions, and improved blade design to reduce operation force.

FEATURES

- Temperature adjustable
- IPx2 Water protection and shock-resistant
- Ready notification by Vibration
- Field replaceable blade and battery for easy maintenance
- Compatible with 200 & 250um fiber ribbons

PART #	DESCRIPTION	PRICE
JR7	Sumitomo Electric JR-7 Thermal Jacket Remover	\$1,100.00
JR-7BL	Sumitomo Electric Replacement Blade for JR-7 Stripper	140.00

AFL RT-02 RIBBONIZING TOOL

The RT-02 is the latest ribbonizing tool from Fujikura, and the first universal ribbonizing tool on the market suitable for forming a temporary ribbon from loose 200 µm or 250 µm fibers. This is also the first tool that features a glue-less process for ribbonizing and splicing 12 fiber ribbons. This saves time and money by eliminating operating inefficiencies such as cure time and contamination of splicing equipment. Simply choose the applicable fiber holder in conjunction with the RT-02 to ribbonize 200µm or 250µm fibers. With this tool, you can now realize the benefits of mass fusion splicing when installing the latest generation of loose fiber micro cables.


PART #	DESCRIPTION	PRICE
S017465	RT-02 (tool only)	\$170.00
S017464	FH-70-12PC (pair of pitch conversion holders for 200 µm loose fibers)	714.00
S017119	FH-70-12 (pair – standard 12F ribbon holders)	273.00

SUMITOMO ELECTRIC GLUELESS FIBER ARRANGMENT TOOL

Sumitomo Electric Lightwave's compact OFA-02 quickly and effortlessly arranges single fibers into ribbons for mass fiber splicing, all without the use of adhesives, drastically reducing ribbon preparation time by eliminating adhesive curing time. The OFA-01 fiber arrangement tool offers the versatility of utilizing 250um or 200um fibers and is compatible with Sumitomo Electric's elite Ribbon Fiber Fusion Splicers.

PART #	DESCRIPTION	PRICE
OFA-02	Glueless Fiber Arrangement Tool (Ribbonizer) for making single strand fibers into ribbons for mass splicing.	\$225.00

AFL

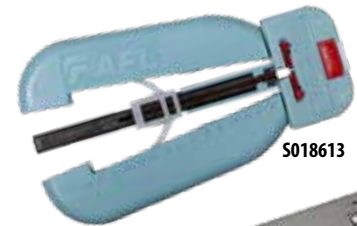

S018613



S016817




S218-R-PLUS

SUMITOMO ELECTRIC LIGHTWAVE



JR-7

AFL

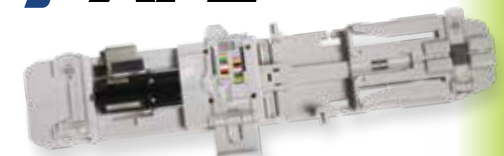


S017465

SUMITOMO ELECTRIC LIGHTWAVE



OFA-02

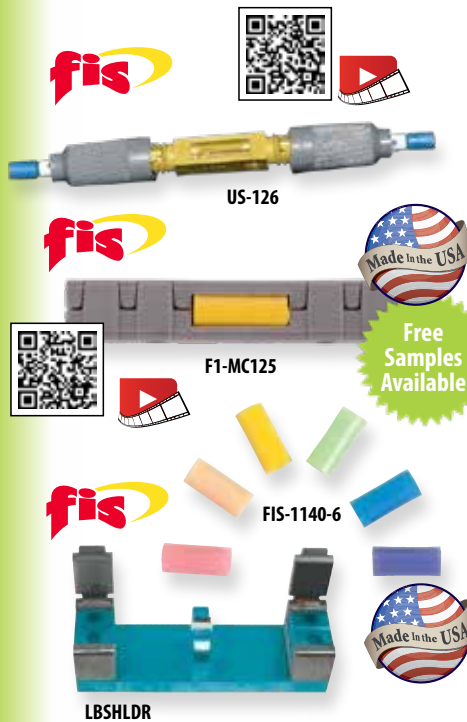

FIS ULTRASPLICE

The ULTRASplice® is a high performance, easy to install reusable mechanical splice. It accepts fiber buffer sizes from 250µm-900µm. The average loss is .2dB with a fiber retention of over 2 lbs. Cleave, insert the fibers and secure by twisting a locking nut. US-126 is IBM #33G8228. Meets and exceeds Telcordia specifications.

PART #	DESCRIPTION	PRICE
US-126	Singlemode / Multimode Universal ULTRASplice®	\$7.95

FIS LOCK JAW

With a self-gripping clamshell design this unique splice allows users to achieve a superior pull strength of 1.5 lbs by simply using super glue. Its design allows use in several splice trays, accepts 125µm clad Singlemode or Multimode with a typical loss of .2dB. Also available in the FIS Mechanical Splice Kit.

PART #	DESCRIPTION	PRICE
F1-MC125	Splice for 125µm Clad Fiber, SM or MM	\$2.95
F1-MC125SK	Splice Kit - (6) splices, cleaver, adhesive, cleaner and strip tool (See page 62)	155.00

ELASTOMERIC LAB SPLICE

The improved FIS Elastomeric Lab Splice is ideal for making temporary fiber connections and can be reused hundreds of times. To use the splice for instrument testing, simply insert a cleaved pigtail from OTDR or Power Meter and the cleaved unconnectorized fiber to be tested. Excellent for both Multimode and Singlemode fiber, the splice accepts fiber cladding diameters of 125µm to 140µm. The Lab Splices are supplied in blister packs of 6 (containing one of each color: pink, peach, yellow, green, blue and purple) or 12 (containing 2 of each color.)

PART #	DESCRIPTION	PRICE
FIS-1140-6	Pack of 6	\$12.00
FIS-1140-12	Pack of 12	21.00
LBSHLDR	Holder	280.00

CORNING FIBRLOK II

The Fibrlok has an insertion loss <.2dB with a fiber retention of >7.75 lbs. Known for low reflection characteristics of -35dB. Using V groove technology, it requires no epoxy. Uses Fibrlok assembly tool 2501. Splice completed in 30 seconds after preparing fiber ends. Thermal stability of -40°C to 80°C. Now Fibrloks fit 250-900µm buffer sizes. **Note: 2539 does not require 2501 tool for assembly.**

PART #	DESCRIPTION	PRICE
2529	FIBRLOK II (250µm or 900µm)	\$11.65
2501	Assembly Tool (For use with 2529)	105.00
2539	Splice and Holder with Built-in Actuator Tool (250µm or 900µm)	20.00

CAMSPlice

This easy to install one size fits all mechanical splice features "Cam" locking mechanism, which requires no adhesive. The CamSplice incorporates a unique alignment method that self centers fibers, providing accurate alignment. Splice losses of less than 0.5dB are consistently achievable. Fits 250/250µm, 250/900µm and 900/900µm.

PART #	DESCRIPTION	PRICE
95-000-04	Camsplce	\$31.50
2104040-01	Assembly Fixture	415.00

MECHANICAL SPLICE PROTECTION HOUSING

Available from FIS is a metallic protection sleeve that slips over mechanical splices for rugged protection. Install the tube and supplied shrink tubes onto the cable before installation and apply a heat source to fix housing into position. Accepts 95-000-04, US126, 2529, F1-MC125 splices offered above.

PART #	DESCRIPTION	PRICE
F1-1002M	Protection Housing	\$4.35



FIS FIELD CLEAVERS

This field or "beaver" cleaver is suitable for use with quick-term connectors and optimal for mechanical splicing. Each cleaver provides a guide for variable cleave lengths from 5-20mm. The blades will perform over 6,000 cleaves before replacement is necessary. The score and snap function is easy to use and preferred by many installers. **Note: No Export Available for F1-0010 and CL008.**

PART #	DESCRIPTION	PRICE
F1-6000	FIS Cleaver	\$139.00
F1-0010	FITEL Cleaver	185.00
S315X02	Replacement Leaf Spring Suitable for both cleavers	65.00
F1-60CBL	FIS Replacement Blade (Carbide) Suitable for both cleavers	35.00
CL008	FITEL Replacement Blade (Carbide) Suitable for both cleavers	37.95




ULTRASLEEVE® PROTECTION SLEEVE

Simply load the fused fiber and close the sleeve. No heat shrink curing, crimping or gluing. Ultrasleeve® features an acrylic foam tape, which seals the sleeve and protects from damage. The Ultrasleeve® splice protector can be closed by hand and is installed after the splice is completed.

PART #	DESCRIPTION
F1-FS60	60mm Splice Protection Sleeve

No Heat
Required!

PRICE
\$2.95

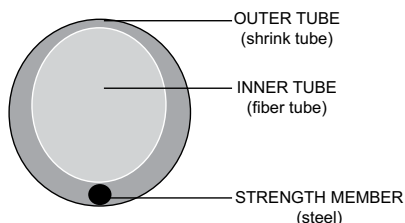

CALL
FOR BULK
PRICING

FUSION SPlice PROTECTION SLEEVES

STANDARD SLEEVE — (3.0mm AFTER SHRINK)

This sleeve design represents the industry's most reliable, highest quality sleeve at an economical price. Standard lengths include 60mm and 40mm. Sleeves come standard with a clear outer tube for viewing the color of the fiber itself.

PART #	DESCRIPTION	1-9	10+
F1-1002C-50	60mm, 50 pk (Clear)	\$10.50	\$9.45
F1-100240C-50	40mm, 50 pk (Clear)	10.50	9.45
F1-1002RC-50	60mm, 50 pk (Red)	10.50	9.45

SLIM SLEEVE — (2.5mm AFTER SHRINK)

These clear protection sleeves use reduced diameter components for a smaller finished product. The smaller diameter allows users to fit more splices into existing splice trays.

PART #	DESCRIPTION	1-9	10+
F1-S25C-50	60mm, 50 pk (Clear)	\$10.50	\$9.45
F1-S2540C-50	40mm, 50 pk (Clear)	10.50	9.45

TAPERED SLEEVE — (3.0mm AFTER SHRINK)

This sleeve offers tapered ends designed to keep the metal strength member in proper position while in use. Available in 60mm and 40mm lengths.

PART #	DESCRIPTION	1-9	10+
F1-1002T-50	60mm, 50 pk (Clear)	\$10.50	\$9.45
F1-100240T-50	40mm, 50 pk (Clear)	10.50	9.45

MICRO SLEEVE (1.5mm After Shrink) & MINI SLEEVE (2.0mm After Shrink)

Designed to fit in smaller areas for splice storage are the Mini and Micro Protection Sleeves. Micro Sleeves will only accommodate 250µm coated fibers. Mini Sleeves will accommodate 900µm or 250µm coated fibers.

PART #	DESCRIPTION	1-9	10+
MCRO140CFD-50	Micro 40mm, 50 pk (Clear)	\$10.50	\$9.45
MCRO125CFD-50	Micro 25mm, 50 pk (Clear)	10.50	9.45
MINI140CDS-50	Mini 40mm, 50 pk (Clear)	\$10.50	\$9.45
MINI125CDS-50	Mini 25mm, 50 pk (Clear)	10.50	9.45

RIBBON SPlice PROTECTION SLEEVE

FIS offers a high quality ribbon splice sleeve that the contractor needs. With Durable Ceramic Reinforcement Rods with Rounded and Polished Edges and Full Length Strength Member for Total Fiber Support, the FIS F110011CPSR-25 meet and exceed Telcordia Standard TA-NWT-001380 and is RoHS compliant.

PART #	DESCRIPTION	1-9	10+
F11011CPSR-25	FIS 25 pack Ribbon fusion splice sleeves 40mm with a glass ceramic strength member.	\$26.00	\$25.00

DIELECTRIC SPlice PROTECTION SLEEVE — (3.0mm After Shrink)

Our Dielectric sleeves are manufactured with a non-metallic strength member for the ultimate in corrosion and electrical resistance.

PART #	DESCRIPTION	1-9	10+
F1-DE60-50	60mm, Clear	\$14.50	\$13.00
F1-DE40-50	40mm, Clear	14.50	13.00

COMMScope PROTECTION SPlice SLEEVE



PART #	DESCRIPTION	PRICING
SMOUV112001	Commscope Splice Sleeves 60mm (100pk)	\$33.75
SMOUV112002	Commscope Splice Sleeves 45mm (100pk)	29.95
SMOUV1120R2/1202	Commscope Protection Splice Sleeve Ribbon 12 (50pk)	66.95

AFL PROTECTION SPlice SLEEVE

PART #	DESCRIPTION	PRICING
S015915-100	AFL FP-60 Protection Sleeve (60mm)(100pk)	\$30.00
S015916-100	AFL FP-40 Protection Sleeve (40mm) (100pk)	30.00
S003027-5	AFL FP-05 12 fiber mass splice protection sleeve (5pk)	10.25

SUMITOMO PROTECTION SPlice SLEEVE

PART #	DESCRIPTION	PRICING
FPS1	Sumitomo Splice Protect Sleeves w/Single Fiber Splice (50pk)	\$12.50
FPS40	Sumitomo 40mm Splice Sleeve (25pk)	12.50
FPS6	Sumitomo Fiber Protector Splice Sleeves 2-12 ribbon (25pk)	24.00

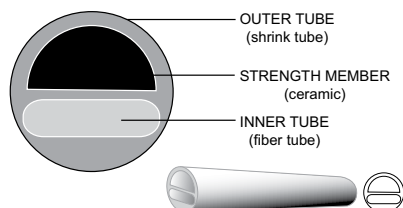

FIS PROTECTION SLEEVE OVEN

FIS' splice protection sleeve oven is the perfect companion to any fusion splicer by allowing for external shrinking of fiber protection sleeves, which extends the life of a fusion splicer's battery. This allows for more splices in the field and improves the efficiency of the splice process. Low profile allows for easy placement of either 40mm or 60mm fusion splice sleeves while providing a stable base for a variety of applications.

PART #	DESCRIPTION	PRICE
F1-9777	Rechargeable Standard Splice Sleeve oven, universal 110/220VAC	\$485.00



ENCLOSURES

ENCLOSURES | INDOOR ENCLOSURES



Rack Mount
Accessories
Page 78 & 79

The FIS Rack Mount Enclosures are designed for low or high density patching applications. These sturdy 14 gauge rack enclosures are available in 1, 2, 4, and 8RU versions. The FIS Enclosures accommodate 19" or 23" racks. Purchase 6, 8, 12 or 24 port adapter panels. Standard color is Black, simply attach suffix to Rack Mount Enclosures for Off-White (-BW), ex. F1RM1RU3X-BW. All adapter plates are sold separately. Ask us to quote your rack mount loaded with adapter plates, splice trays, pigtails and patch cords.



FIS Rack Mount Fiber Optic Swing-Out Patch Panels



F1-RMS01RU2X

(2) Six packs = 12 Port
(2) Twelve packs = 24 Port



F1-RMS02RU4X

(4) Six packs = 24 Port
(4) Twelve packs = 48 Port



Closed



F1-RMRX2RU4X

(4) Six packs = 24 Port
(4) Twelve packs = 48 Port

1RU SWING-OUT PATCH PANEL - ACCOMMODATES (2) ADAPTER PLATES

The 1RU FIS Swing Out Patch Panel accommodates (2) LGX adapter plates, modules or cassettes. The swing-out design offers easy access to the patch and splice bay. Multiple cable retention brackets and tie down spots allow for convenient cable management. These units can be flush mounted or mounted with 3.5" protrusion from the rack with no additional accessories. Rack mount installs into a standard 19" rack with included mounting hardware. Adapter plates and 23" mounting brackets are sold separately.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-RMS01RU2X	1RU Swing Out Enclosure, 2 Plates, Black, Unloaded	1.75" x 17" x 11.5"	\$105.00
F1-RMS01RU2X-BW	1RU Swing Out Enclosure, 2 Plates, Off White, Unloaded	1.75" x 17" x 11.5"	105.00

Flush mount bracket available on page 77

2RU SWING-OUT PATCH PANEL - ACCOMMODATES (4) ADAPTER PLATES

The 2RU FIS Swing Out Patch Panel accommodates (4) LGX adapter plates, modules or cassettes. The swing-out design offers easy access to the patch and splice bay. Multiple cable retention brackets and tie down spots allow for convenient cable management. These units can be flush mounted or mounted with 3.5" protrusion from the rack with no additional accessories. Rack mount installs into a standard 19" rack with included mounting hardware. Adapter plates and 23" mounting brackets are sold separately.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-RMS02RU4X	2RU Swing Out Enclosure, 4 Plates, Black, Unloaded	3.5" x 17" x 11.5"	\$110.00
F1-RMS02RU4X-BW	2RU Swing Out Enclosure, 4 Plates, Off White, Unloaded	3.5" x 17" x 11.5"	110.00

Flush mount bracket available on page 77

FIS FLUSHMOUNT ENCLOSURE (FOR PEDESTALS / CABINETS)

Designed to provide cabinet users front entrance access to the rear of fiber interconnect connectors with use of swing out panel. Includes a splice tray riser and two 24 fiber fusion splice trays. The attached side cable manager can accommodate cables or allow rear exit to the back of the cabinet where often chimneys are installed for routing cables from different bays. Interconnect utilizes standard LGX footprint adapter panels. Optional front lacing bar can dress cables to cable manager and secure them from being snagged or pinched in cabinet door. **LGX Panels see page 70**

PART #	DESCRIPTION	DIMENSIONS (HxWxD)	PRICE
F1RMRX2RU4X	FIS Flush mount 2RU Swing Out Enclosure, Left Side Cable Manager and Rear Exit Cable Return, Unloaded	3.5" x 18.20" x 10.42"	\$125.00
F1RMRX2RU4XLB	Lacing Bar Accessory for F1RMRX2RU4X (Not Shown)	11.50" x 1.25" (L x D)	15.00

FIS Rack Mount Fiber Optic Patch and Splice Panel Enclosure



F1-RMSP4RU4X



F1-RMSP8RU12X

4RU PATCH AND SPLICE PANEL - ACCOMMODATES (4) ADAPTER PLATES

The 4RU FIS Patch and Splice Panel accommodates (4) LGX adapter plates, modules or cassettes. The 2 sliding trays on the top and bottom of the enclosure allow for easy access to both patch and splice bays. Multiple cable retention brackets, splice tray mounts and tie down spots allow for convenient cable management. Rack mount installs into a standard 19" rack with included mounting hardware. Adapter plates, splice trays and 23" mounting brackets are sold separately.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-RMSP4RU4X	4RU Patch and Splice Enclosure, 4 Plates, Black, Unloaded	7.125" x 17" x 14"	\$240.00
F1-RMSP4RU4X-BW	4RU Patch and Splice Enclosure, 4 Plates, Off White, Unloaded	7.125" x 17" x 14"	240.00

8RU PATCH AND SPLICE PANEL - ACCOMMODATES (12) ADAPTER PLATES

The 8RU FIS Patch and Splice Panel accommodates (12) LGX adapter plates, modules or cassettes. The 2 sliding trays on the top and bottom of the enclosure allow for easy access to both patch and splice bays. Multiple cable retention brackets, splice tray mounts and tie down spots allow for convenient cable management. Rack mount installs into a standard 19" rack with included mounting hardware. Adapter plates, splice trays and 23" mounting brackets are sold separately.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-RMSP8RU12X	8RU Patch and Splice Enclosure, 12 Plates, Black, Unloaded	14" x 17" x 14"	\$252.00

1RU RACK MOUNT - ACCOMMODATES (3) ADAPTER PLATES

The 1RU FIS Rack Mount Enclosure accommodates (3) LGX adapter plates, modules or cassettes. Slide out trays and removable front and back doors allow easy access to the patch bay. Multiple cable retention brackets and tie down spots allow for convenient cable management. Spring loaded stop latches keep the tray securely in place when retracted. Rack mount installs into a standard 19" rack. **Adapter plates, 23" mounting brackets and 19" flush mounting brackets are sold separately.**

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-RM1RU3X	1RU Rack Mount, 3 Plates, Solid Front/Rear Doors, Black, Unloaded	1.75" x 17" x 14"	\$134.00
F1-RM1RU3X-BW	1RU Rack Mount, 3 Plates, Solid Front/Rear Doors, Off White, Unloaded	1.75" x 17" x 14"	134.00

2RU RACK MOUNT - ACCOMMODATES (4) ADAPTER PLATES

The 2RU FIS Rack Mount Enclosure, accommodates (4) LGX adapter plates, modules or cassettes. Slide out trays and removable front and back doors allow easy access to the patch bay. Multiple cable retention brackets and tie down spots allow for convenient cable management. A smoked Lexan front door is available to provide visibility into the enclosure. Rack mount installs into a standard 19" rack. **Adapter plates, 23" mounting brackets and 19" flush mounting brackets are sold separately.**

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-RM2RU4X	2RU Rack Mount, 4 Plates, Solid Front/Rear Doors, Black, Unloaded	3.5" x 17" x 14"	\$158.00
F1-RM2RU4XL	2RU Rack Mount, 4 Plates, Lexan Front and Solid Rear Door, Black, Unloaded	3.5" x 17" x 14"	163.00
F1-RM2RU4X-BW	2RU Rack Mount, 4 Plates, Solid Front/Rear Doors, Off White, Unloaded	3.5" x 17" x 14"	158.00
F1-RM2RU4XL-BW	2RU Rack Mount, 4 Plates, Lexan Front and Solid Rear Door, Off White, Unloaded	3.5" x 17" x 14"	163.00

2RU RACK MOUNT - ACCOMMODATES (6) ADAPTER PLATES

The 2RU FIS Rack Mount Enclosure, accommodates (6) LGX adapter plates, modules or cassettes. Slide out trays and removable front and back doors allow easy access to the patch bay. Multiple cable retention brackets and tie down spots allow for convenient cable management. A smoked Lexan front door is available to provide visibility into the enclosure. Rack mount installs into a standard 19" rack. **Adapter plates, 23" mounting brackets and 19" flush mounting brackets are sold separately.**

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-RM2RU6X	2RU Rack Mount, 6 Plates, Solid Front/Rear Doors, Black, Unloaded	3.5" x 17" x 14"	\$163.00
F1-RM2RU6XL	2RU Rack Mount, 6 Plates, Lexan Front and Solid Rear Door, Black, Unloaded	3.5" x 17" x 14"	168.00
F1-RM2RU6X-BW	2RU Rack Mount, 6 Plates, Solid Front/Rear Doors, Off White, Unloaded	3.5" x 17" x 14"	163.00
F1-RM2RU6XL-BW	2RU Rack Mount, 6 Plates, Lexan Front and Solid Rear Door, Off White, Unloaded	3.5" x 17" x 14"	168.00

4RU RACK MOUNT - ACCOMMODATES (12) ADAPTER PLATES

The 4RU FIS Rack Mount Enclosure accommodates (12) LGX adapter plates, modules or cassettes. Slide out trays and removable front and back doors allow easy access to the patch bay. Multiple cable retention brackets and tie down spots allow for convenient cable management. A smoked Lexan front door is available to provide visibility into the enclosure. Rack mount installs into a standard 19" rack. **Adapter plates and 23" mounting brackets are sold separately.**

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-RM4RU12X	4RU Rack Mount, 12 Plates, Solid Front/Rear Doors, Black, Unloaded	7.125" x 17" x 14"	\$196.00
F1-RM4RU12XL	4RU Rack Mount, 12 Plates, Lexan Front and Solid Rear Door, Black, Unloaded	7.125" x 17" x 14"	200.00
F1-RM4RU12X-BW	4RU Rack Mount, 12 Plates, Solid Front/Rear Doors, Off White, Unloaded	7.125" x 17" x 14"	196.00
F1-RM4RU12XL-BW	4RU Rack Mount, 12 Plates, Lexan Front and Solid Rear Door, Off White, Unloaded	7.125" x 17" x 14"	200.00

8RU RACK MOUNT - ACCOMMODATES (24) ADAPTER PLATES

The 8RU FIS Rack Mount Enclosure accommodates (24) LGX adapter plates, modules or cassettes. Slide out trays and removable front and back doors allow easy access to the patch bay. Multiple cable retention brackets and tie down spots allow for convenient cable management. A smoked Lexan front door is available to provide visibility into the enclosure. Rack mount installs into a standard 19" rack. **Adapter plates and 23" mounting brackets are sold separately.**

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-RM8RU24X	8RU Rack Mount, 24 Plates, Solid Front/Rear Doors, Black, Unloaded	14" x 17" x 14"	\$294.00
F1-RM8RU24XL	8RU Rack Mount, 24 Plates, Lexan Front and Solid Rear Door, Black, Unloaded	14" x 17" x 14"	298.00
F1-RM8RU24X-BW	8RU Rack Mount, 24 Plates, Solid Front/Rear Doors, Off White, Unloaded	14" x 17" x 14"	294.00
F1-RM8RU24XL-BW	8RU Rack Mount, 24 Plates, Lexan Front and Solid Rear Door, Off White, Unloaded	14" x 17" x 14"	298.00

FIS Rack Mount Fiber Optic Flush Mount Patch Panel Frame**1RU FLUSH MOUNT PATCH PANEL FRAME - ACCOMMODATES (3) ADAPTER PLATES**

The 1RU FIS Flush Mount Patch Panel Frame accommodates (3) LGX adapter plates, modules or cassettes. The flush mount design attaches flat against the rack to save space in compact applications. Patch panel frame installs into a standard 19" rack with included mounting hardware. **Adapter plates sold separately.**

PART #	DESCRIPTION	(HxW)	PRICE
F1-FM1RU3X	1RU Flush Mount Frame, 3 Plates, 19", Black, Unloaded	1.75" x 19"	\$20.00

4RU FLUSH MOUNT PATCH PANEL FRAME - ACCOMMODATES (12) ADAPTER PLATES

The 4RU FIS Flush Mount Patch Panel Frame accommodates (12) LGX adapter plates, modules or cassettes. The flush mount design attaches flat against the rack to save space in compact applications. Patch panel frame installs into a standard 19" rack with included mounting hardware. **Adapter plates sold separately.**

PART #	DESCRIPTION	(HxW)	PRICE
F1-FM4RU12X	4RU Flush Mount Frame, 12 Plates, 19", Black, Unloaded	7" x 19"	\$39.95



F1-RM1RU3X
(3) Six packs = 18 Port
(3) Twelve packs = 36 Port



F1-RM2RU4X
(4) Six packs = 24 Port
(4) Twelve packs = 48 Port




F1-RM2RU6X
(6) Six Packs = 36 port
(6) Twelve packs = 72 port




F1-RM4RU12X
(12) Six Packs = 72 port
(12) Twelve packs = 144 port



F1-RM8RU24X
(24) Six packs = 144 Port
(24) Twelve packs = 288 Port

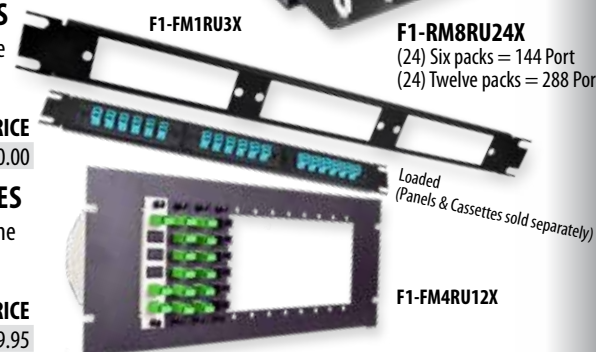

F1-FM1RU3X

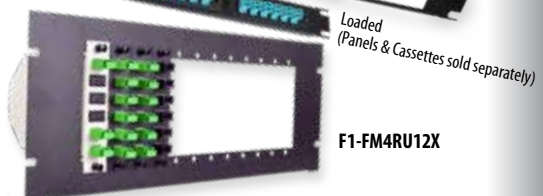

F1-FM4RU12X



F1-CW1X

F1-CW2X

F1-MW2X

F1-EW4X

F1-DW2X

F1-SDW4X

FIS Wall Mount Fiber Optic Enclosures

FIS COMPACT WALL MOUNT (INDUSTRIAL DIN RAIL MOUNTABLE)

The FIS Compact Wall Mount has capacity for (1) or (2) LGX style adapter plates or MPO/MTP cassettes depending on the size of enclosure. The compact form factor along with an included Din Rail mount allows the enclosure to be mounted virtually anywhere. Equipped with a fully removable door makes either splicing pigtails or patching pre-terminated cables simple. 40mm splice sleeves (F1100240C-50) are recommended for use in these enclosures.

PART #	DESCRIPTION	DIMENSIONS (HxWxD)	PRICE
F1CW1X	1 Plate Compact Wall Mount Enclosure Black	5.5" x 7.5" x 1.35"	\$57.95
F1CW2X	2 Plate Compact Wall Mount Enclosure Black	5.5" x 7.5" x 2.57"	67.95

FIS MINI WALL MOUNT ENCLOSURE

The FIS Mini Wall Mount has capacity for (1) or (2) LGX style adapter plates, depending on the size of the enclosure chosen. Ideal for patching smaller quantities of fibers in a compact form factor. Fiber enters and exits from the bottom of the enclosure, and a cable spool and tie down stance provide fiber management options. A single door is removable and lockable with a padlock (not included).

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-MW1X	1 Plate Mini (Unloaded) Black	9.18" x 6.38" x 2.625"	\$58.00
F1-MW1X-BW	1 Plate Mini (Unloaded) Off White	9.18" x 6.38" x 2.625"	58.00
F1-MW2X	2 Plate Mini (Unloaded) Black	9.18" x 6.38" x 2.625"	70.00
F1-MW2X-BW	2 Plate Mini (Unloaded) Off White	9.18" x 6.38" x 2.625"	70.00

FIS ECONOMY WALL MOUNT ENCLOSURES

The FIS Economy Wall Mount has capacity for (2) or (4) LGX style adapter plates depending on the size of the enclosure chosen. It features a cable spool, bridge stances and a mounting stud and nut to secure splice trays. The lockable inner door (lock/key included) provides safe storage of incoming cable while allowing the technician to manipulate outgoing fiber patches. The outer door is removable and lockable with a padlock (sold separately). Accommodates quantity (2) splice trays approximately 7"L x 4"W (Ex. F1-SPL12). Ask an FIS sales associate about pre-loading the enclosure with fiber pigtails, splice trays and adapter plates.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-EW2X	2 Plate Economy (Unloaded) Black	10.33" x 12.12" x 3.81"	\$126.00
F1-EW2X-BW	2 Plate Economy (Unloaded) Off White	10.33" x 12.12" x 3.81"	126.00
F1-EW4X	4 Plate Economy (Unloaded) Black	12.24" x 12.12" x 3.81"	130.00
F1-EW4X-BW	4 Plate Economy (Unloaded) Off White	12.24" x 12.12" x 3.81"	130.00

FIS DELUXE WALL MOUNT ENCLOSURES

The FIS Deluxe Wall Mount has capacity for (2), (4), (8), or (12) LGX style adapter plates depending on the size of the enclosure chosen. It features a larger splicing bay and more cable spooling brackets than the Economy version. Bridge stances and a splice tray mounting stud and nut are also included for easy installation of splice trays. The two front doors are removable to give unrestricted access during installation, and each door is also lockable with a padlock (sold separately) to provide security when in use. Accommodates quantity (2) splice trays approximately 7"L x 4"W (Ex. F1-SPL12) or 11.72"L x 4"W (Ex. F1-SPL24). Ask an FIS sales associate about pre-loading the enclosure with fiber pigtails, splice trays and adapter plates.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-DW2X	2 Plate Deluxe (Unloaded) Black	13.16" x 14.44" x 3.06"	\$124.00
F1-DW2X-BW	2 Plate Deluxe (Unloaded) Off White	13.16" x 14.44" x 3.06"	124.00
F1-DW4X	4 Plate Deluxe (Unloaded) Black	13.16" x 14.44" x 3.06"	129.00
F1-DW4X-BW	4 Plate Deluxe (Unloaded) Off White	13.16" x 14.44" x 3.06"	129.00
F1-DW8X	8 Plate Deluxe (Unloaded) Black	13.16" x 14.51" x 5.60"	152.00
F1-DW8X-BW	8 Plate Deluxe (Unloaded) Off White	13.16" x 14.51" x 5.60"	152.00
F1-DW12X	12 Plate Deluxe (Unloaded) Black	14.51" x 19.38" x 5.60"	160.00
F1-DW12X-BW	12 Plate Deluxe (Unloaded) Off White	14.51" x 19.38" x 5.60"	160.00
F1-DW12XEXT	12 Plate Deluxe Extended (Unloaded) Black	14.51" x 25.63" x 5.60"	165.00

FIS SINGLE DOOR WALL MOUNT

The FIS Single Door Wall Mount is a rugged 16 gauge cold rolled steel enclosure that can hold up to (4) LGX adapter plates. This enclosure is designed for use where space is at a premium. Some key features include the solid front door and exposed adapter plate master panel. Two cable entries along with the flat front door allows these enclosures to be "stacked". Now featuring a central member strain relief kit.

PART #	DESCRIPTION	DIMENSIONS (HxWxD)	PRICE
F1SDW4X	FIS 4 Panel Single Front Door Wall Mount Black	11.81"H x 9.05" x 3.62"	\$70.00

PRE-LOADED FIBER OPTIC ENCLOSURES

The FIS Pre-Loaded Fiber Optic Enclosures are designed to be a Plug and Play solution. These are offered in both Rack Mount and Wall Mount style enclosures. They come loaded with your choice of SC/LC adapter panels and splice trays, or adapter panels, splice trays and pigtails. Available in both singlemode and multimode (50um 10gig). All enclosures include splice trays unless requested without. *Other Configurations available upon request.



Part Number Configurator

ENCLOSURE		CONNECTOR TYPE	TOTAL PORTS	PIGTAIL	SPLICE TRAYS
F1RM1RU3X		SCU	36	SP	NT
F1RM1RU3X	F1DW2X	SCU = SC/UPC	12	SP = PIGTAILS	NT = NO TRAYS
F1RM2RU4X	F1DW4X	SCA = SC/APC	24		
F1RM2RU6X	F1DW8X	SCOM3 = SC/PC	36		
F1RM4RU12X	F1DW12X	LCU = LC/UPC	48		
F1RMS01RU2X		LCA = LC/APC	72		
F1RMS02RU4X		LCOM3 = LC/PC	96		
			144		

*24 fiber trays are included by default if not specified.

Part # Example:
F1RM1RU3X-SCU-36-SP
FIS 1RU Rack Mount w/ 3 SC/UPC Plates, Pigtails & Trays, Black (36 Fibers)



FIS Preloaded Rack Mount Enclosures

FIS 1RU RACK MOUNTS

PART #	DESCRIPTION	PRICE
F1RM1RU3XSCUPC36SP	FIS 1RU Rack Mount w/3 SC/UPC Plates, Pigtails & Trays, Black (36 Fibers)	\$310.00
F1RM1RU3XSCAPC36SP	FIS 1RU Rack Mount w/3 SC/APC Plates, Pigtails & Trays, Black (36 Fibers)	275.00
F1RM1RU3XSCOM336SP	FIS 1RU Rack Mount w/3 SC/PC OM3 Plates, Pigtails & Trays, Black (36 Fibers)	270.00
F1RM1RU3XLCUPC36SP	FIS 1RU Rack Mount w/3 LC/UPC Plates, Pigtails & Trays, Black (36 Fibers)	300.00
F1RM1RU3XLCAPC36SP	FIS 1RU Rack Mount w/3 LC/APC Plates, Pigtails & Trays, Black (36 Fibers)	300.00
F1RM1RU3XLCOM336SP	FIS 1RU Rack Mount w/3 LC/PC OM3 Plates, Pigtails & Trays, Black (36 Fibers)	330.00



F1-RM1RU3XLCUPC36

FIS 2RU RACK MOUNTS

PART #	DESCRIPTION	PRICE
F1RM2RU6XSCUPC72SP	FIS 2RU Rack Mount w/6 SC/UPC Plates, Pigtails & Trays, Black (72 Fibers)	\$400.00
F1RM2RU6XSCAPC72SP	FIS 2RU Rack Mount w/6 SC/APC Plates, Pigtails & Trays, Black (72 Fibers)	400.00
F1RM2RU6XSCOM372SP	FIS 2RU Rack Mount w/6 SC/PC OM3 Plates, Pigtails & Trays, Black (72 Fibers)	385.00
F1RM2RU6XLCUPC72SP	FIS 2RU Rack Mount w/6 LC/UPC Plates, Pigtails & Trays, Black (72 Fibers)	465.00
F1RM2RU6XLCAPC72SP	FIS 2RU Rack Mount w/6 LC/APC Plates, Pigtails & Trays, Black (72 Fibers)	455.00
F1RM2RU6XLCOM372SP	FIS 2RU Rack Mount w/6 LC/PC OM3 Plates, Pigtails & Trays, Black (72 Fibers)	400.00



F1-RM2RU6XLCUPC72SP

FIS 4RU RACK MOUNTS

PART #	DESCRIPTION	PRICE
F1RM4RU12XSCUPC144SP	FIS 4RU Rack Mount w/12 SC/UPC Plates, Pigtails & Trays, Black (144 Fibers)	\$620.00
F1RM4RU12XSCAPC144SP	FIS 4RU Rack Mount w/12 SC/APC Plates, Pigtails & Trays, Black (144 Fibers)	650.00
F1RM4RU12XSCOM3144SP	FIS 4RU Rack Mount w/12 SC/PC OM3 Plates, Pigtails & Trays, Black (144 Fibers)	625.00
F1RM4RU12XLCUPC144SP	FIS 4RU Rack Mount w/12 LC/UPC Plates, Pigtails & Trays, Black (144 Fibers)	685.00
F1RM4RU12XLCAPC144SP	FIS 4RU Rack Mount w/12 LC/APC Plates, Pigtails & Trays, Black (144 Fibers)	745.00
F1RM4RU12XLCOM3144SP	FIS 4RU Rack Mount w/12 LC/PC OM3 Plates, Pigtails & Trays, Black (144 Fibers)	875.00



BACK VIEW
F1-RM4RU12XSCAPC144SP

FIS 1RU SWING OUT RACK MOUNT

PART #	DESCRIPTION	PRICE
F1RMS01RU2XSCUPC24SP	FIS 1RU Swing Out Rack Mount w/2 SC/UPC Plates, Pigtails & Tray Black (24 Fibers)	\$215.00
F1RMS01RU2XSCAPC24SP	FIS 1RU Swing Out Rack Mount w/2 SC/APC Plates, Pigtails & Tray Black (24 Fibers)	195.00
F1RMS01RU2XSCOM324SP	FIS 1RU Swing Out Rack Mount w/2 SC/PC OM3 Plates, Pigtails & Tray Black (24 Fibers)	180.00
F1RMS01RU2XLCUPC24SP	FIS 1RU Swing Out Rack Mount w/2 LC/UPC Plates, Pigtails & Tray Black (24 Fibers)	210.00
F1RMS01RU2XLCOM324SP	FIS 1RU Swing Out Rack Mount w/2 LC/PC OM3 Plates, Pigtails & Tray Black (24 Fibers)	230.00



F1RMS01RU2XLCAPC24

*Other Configurations available upon request.



F1-DW2XSCAPC24SP



F1-DW4XLCOM348SP



F1-DW8XSCUPC96SP



F1-PSCKLCUPC24



F1-MTPMLCOM324

FIS Preloaded Wall Mount Enclosures

FIS 2 PANEL DELUXE WALL MOUNTS

PART #	DESCRIPTION	PRICE
F1DW2XSCUPC24SP	FIS 2 Panel Deluxe Wall Mount w/2 SC/UPC Plates, Pigtailed & Tray, Black (24 Fibers)	\$190.00
F1DW2XSCAPC24SP	FIS 2 Panel Deluxe Wall Mount w/2 SC/APC Plates, Pigtailed & Tray, Black (24 Fibers)	195.00
F1DW2XSCOM324SP	FIS 2 Panel Deluxe Wall Mount w/2 SC/PC OM3 Plates, Pigtailed & Tray, Black (24 Fibers)	185.00
F1DW2XLCUPC24SP	FIS 2 Panel Deluxe Wall Mount w/2 LC/UPC Plates, Pigtailed & Tray, Black (24 Fibers)	205.00
F1DW2XLCOM324SP	FIS 2 Panel Deluxe Wall Mount w/2 LC/PC OM3 Plates, Pigtailed & Tray, Black (24 Fibers)	195.00

*Other configurations available upon request.

FIS 4 PANEL DELUXE WALL MOUNTS

PART #	DESCRIPTION	PRICE
F1DW4XSCUPC48SP	FIS 4 Panel Deluxe Wall Mount w/4 SC/UPC Plates, Pigtailed & Tray, Black (48 Fibers)	\$270.00
F1DW4XSCAPC48SP	FIS 4 Panel Deluxe Wall Mount w/4 SC/APC Plates, Pigtailed & Tray, Black (48 Fibers)	275.00
F1DW4XSCOM348SP	FIS 4 Panel Deluxe Wall Mount w/4 SC/PC OM3 Plates, Pigtailed & Tray, Black (48 Fibers)	255.00
F1DW4XLCUPC48SP	FIS 4 Panel Deluxe Wall Mount w/4 LC/UPC Plates, Pigtailed & Tray, Black (48 Fibers)	280.00
F1DW4XLCOM348SP	FIS 4 Panel Deluxe Wall Mount w/4 LC/PC OM3 Plates, Pigtailed & Tray, Black (48 Fibers)	265.00

*Other configurations available upon request.

FIS 8 PANEL DELUXE WALL MOUNTS

PART #	DESCRIPTION	PRICE
F1DW8XSCUPC96SP	FIS 8 Panel Deluxe Wall Mount w/8 SC/UPC Plates, Pigtailed & Tray, Black (96 Fibers)	\$645.00
F1DW8XSCAPC96SP	FIS 8 Panel Deluxe Wall Mount w/8 SC/APC Plates, Pigtailed & Tray, Black (96 Fibers)	580.00
F1DW8XSCOM396SP	FIS 8 Panel Deluxe Wall Mount w/8 SC/PC OM3 Plates, Pigtailed & Tray, Black (96 Fibers)	565.00
F1DW8XLCUPC96SP	FIS 8 Panel Deluxe Wall Mount w/8 LC/UPC Plates, Pigtailed & Tray, Black (96 Fibers)	750.00
F1DW8XLCOM396SP	FIS 8 Panel Deluxe Wall Mount w/8 LC/PC OM3 Plates, Pigtailed & Tray, Black (96 Fibers)	645.00

*Other configurations available upon request.

FIS PATCH & SPLICE CASSETTE KITS

The new FIS Patch & Splice Cassette kit is an all encompassing unit. The fully removable adapter panel and splice chips make splicing and cable management a breeze. With an LGX footprint, these cassettes can be installed in most fiber optic rack and wall mount enclosures. Each kit includes an adapter panel, pigtailed, and splice chips. 12ct and 24ct (LC) configurations available for both single mode and multimode applications, and can be used with both single fiber and mass fusion offerings.

PART #	DESCRIPTION	PRICE
F1PSCKLCUPC12	FIS Patch & Splice Cassette Kit, Singlemode, LC/UPC, 12 Fiber	\$145.00
F1PSCKLCAPC12	FIS Patch & Splice Cassette Kit, Singlemode, LC/APC, 12 Fiber	145.00
F1PSCKLCOM312	FIS Patch & Splice Cassette Kit, Multimode OM3, LC/PC, 12 Fiber	145.00
F1PSCKSCUPC12	FIS Patch & Splice Cassette Kit, Singlemode, SC/UPC, 12 Fiber	145.00
F1PSCKSCAPC12	FIS Patch & Splice Cassette Kit, Singlemode, SC/APC, 12 Fiber	145.00
F1PSCKSCOM312	FIS Patch & Splice Cassette Kit, Multimode OM3, SC/PC, 12 Fiber	145.00
F1PSCKLCUPC24	FIS Patch & Splice Cassette Kit, Singlemode, LC/UPC, 24 Fiber	260.00
F1PSCKLCAPC24	FIS Patch & Splice Cassette Kit, Singlemode, LC/APC, 24 Fiber	260.00
F1PSCKLCOM324	FIS Patch & Splice Cassette Kit, Multimode OM3, LC/PC, 24 Fiber	260.00
F1PSCKLCUPC12R	FIS Patch & Splice Cassette Kit, Singlemode, LC/UPC, 12 Fiber, Ribbon Pigtailed	160.00
F1PSCKLCAPC12R	FIS Patch & Splice Cassette Kit, Singlemode, LC/APC, 12 Fiber, Ribbon Pigtailed	160.00
F1PSCKLCOM312R	FIS Patch & Splice Cassette Kit, Multimode OM3, LC/PC, 12 Fiber, Ribbon Pigtailed	160.00
F1PSCKSCUPC12R	FIS Patch & Splice Cassette Kit, Singlemode, SC/UPC, 12 Fiber, Ribbon Pigtailed	160.00
F1PSCKSCAPC12R	FIS Patch & Splice Cassette Kit, Singlemode, SC/APC, 12 Fiber, Ribbon Pigtailed	160.00
F1PSCKSCOM312R	FIS Patch & Splice Cassette Kit, Multimode OM3, SC/PC, 12 Fiber, Ribbon Pigtailed	160.00
F1PSCKLCUPC24R	FIS Patch & Splice Cassette Kit, Singlemode, LC/UPC, 24 Fiber, Ribbon Pigtailed	275.00
F1PSCKLCAPC24R	FIS Patch & Splice Cassette Kit, Singlemode, LC/APC, 24 Fiber, Ribbon Pigtailed	275.00
F1PSCKLCOM324R	FIS Patch & Splice Cassette Kit, Multimode OM3, LC/PC, 24 Fiber, Ribbon Pigtailed	275.00

FIS MPO/MTP CASSETTES

The FIS MPO/MTP Module is a pre-terminated, pre-tested, rack mount module system allowing for a simple installation of MPO/MTP backbone cables with a transition to standard LC or SC connections. The FIS modules are designed to fit into enclosures with LGX slot configurations.

PART #	DESCRIPTION	PRICE
F1MTPMLCOS212	12 fiber SM OS2, 1 rear MTP/male port, 6 front LC duplex ports Type A	\$190.00
F1MTPMLCOM312	12 fiber MM OM3, 1 rear MTP/male port, 6 front LC duplex ports Type A	150.00
F1MTPMLCOM312B	12 fiber MM OM3, 1 rear MTP/male port, 6 front LC duplex ports Type B	150.00
F1MTPMSCOS212	12 fiber SM OS2, 1 rear MTP/male port, 6 front SC duplex ports Type A	190.00
F1MTPMSCAPCOS212	12 fiber SM OS2, 1 rear MTP/male port, 6 front SC/APC duplex ports Type A	190.00
F1MTPMSCOM312	12 fiber MM OM3, 1 rear MTP/male port, 6 front SC duplex ports Type A	150.00
F1MTPMSCOM312B	12 fiber MM OM3, 1 rear MTP/male port, 6 front SC duplex ports Type B	150.00
F1MTPMLCOS224	24 fiber SM OS2, 2 rear MTP/male port, 6 front LC quad ports Type A	350.00
F1MTPMLCOM324	24 fiber MM OM3, 2 rear MTP/male port, 6 front LC quad ports Type A	270.00

*All cassettes are also available with MTP Female ports

FIS SPECIALTY INNERCONNECT PRODUCTS



FIS FLUSH MOUNT PANELS

The FIS 1RU Flush Mount Panel is designed to patch fiber optic cables within a rackmount or cabinet. The high density of each panel allows you to maximize your rack space. Its recommended to use these panels in conjunction with the FIS 1RU Lacing Shelf.

PART #	DESCRIPTION	DIMENSIONS (HxW)	PRICE
F1FMP1RUSCUPC24	FIS Flush Mount Panel 1RU SC/UPC, 24 ports	1.75" x 19"	\$40.00
F1FMP1RUSCAPC24	FIS Flush Mount Panel 1RU SC/APC, 24 ports	1.75" x 19"	40.00
F1FMP1RUSC10GIG24	FIS Flush Mount Panel 1RU SC OM3, 24 ports	1.75" x 19"	40.00
F1FMP1RUSCUPC48	FIS Flush Mount Panel 1RU SC/UPC, 48 ports	1.75" x 19"	55.00
F1FMP1RUSCAPC48	FIS Flush Mount Panel 1RU SC/APC, 48 ports	1.75" x 19"	55.00
F1FMP1RUSC10GIG48	FIS Flush Mount Panel 1RU SC OM3, 48 ports	1.75" x 19"	55.00
F1FMP1RULCUPC48	FIS Flush Mount Panel 1RU LC/UPC, 48 ports	1.75" x 19"	55.00
F1FMP1RULCAPC48	FIS Flush Mount Panel 1RU LC/APC, 48 ports	1.75" x 19"	55.00
F1FMP1RULC10GIG48	FIS Flush Mount Panel 1RU LC OM3, 48 ports	1.75" x 19"	55.00
F1FMP1RULCUPC96	FIS Flush Mount Panel 1RU LC/UPC, 96 ports	1.75" x 19"	75.00
F1FMP1RULCAPC96	FIS Flush Mount Panel 1RU LC/APC, 96 ports	1.75" x 19"	75.00
F1FMP1RULC10GIG96	FIS Flush Mount Panel 1RU LC OM3, 96 ports	1.75" x 19"	75.00



F1FMP1RUSCUPC24



F1FMP1RUSCAPC48




F1FMP1RULC10GIG96

FIS CABLE LACING SHELF

FIS 1U Cable Lacing Shelf optimally organizes cables in rackmount setups. It supports cable management above, below, behind, or in front of network devices, freeing up valuable rack space. The included Hook and Loop Cable Ties simplify the process, providing support, organization, and protection for network cabling.

PART #	DESCRIPTION	DIMENSIONS (HxWxD)	PRICE
F11RULACINGSHELF	FIS 1RU Lacing Shelf, 6" Deep	1.75" x 19" x 6"	\$27.50

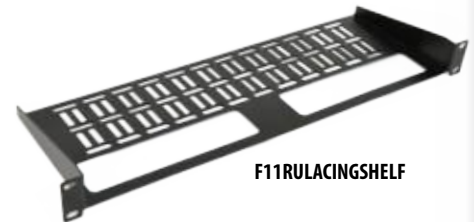

F11RULACINGSHELF

FIS PATCH AND SPLICE WALL MOUNT ENCLOSURE

The FIS Patch and Splice Wall Mount enclosure is lightweight and easy to install. There is capacity for (2), (4), or (8) LGX style adapter plates depending on the size of the enclosure chosen. This unit features a lockable (lock/key included) compact housing that allows both splicing and connecting of fiber optic cables. FF-WM012 accommodates QTY (1) splice tray approximately 7"L x 4"W (Ex. F1-SPL12). FF-WM024 accommodates QTY (2) splice trays approximately 7"L x 4"W (Ex. F1-SPL12). FF-WM048 accommodates QTY (4) splice trays approximately 7"L x 4"W (Ex. F1-SPL12) or 11.72"L x 4"W (Ex. F1-SPL24).

PART #	DESCRIPTION	(HxWxD)	PRICE
FF-WM012	2 Plate Patch and Splice (Unloaded) Off White	6" x 12" x 4.5"	\$285.95
FF-WM012-BLK	2 Plate Patch and Splice (Unloaded) Black	6" x 14" x 4.5"	220.95
FF-WM024	4 Plate Patch and Splice (Unloaded) Off White	11" x 14" x 4.5"	205.00
FF-WM024-BLK	4 Plate Patch and Splice (Unloaded) Black	11" x 12" x 4.5"	195.00
FF-WM048	8 Plate Patch and Splice (Unloaded) Off White	16" x 20" x 6.5"	325.00
FF-WM048-BLK	8 Plate Patch and Splice (Unloaded) Black	16" x 20" x 6.5"	290.00



FF-WM012BLK



F1-SW12T

FIS WALL MOUNT SPLICE ENCLOSURE

The FIS Wall Mount Splice Enclosure provides a secure splice bay for up to (12) splice trays. Cable entry and exit holes are now located on the tops and sides of the unit, and are protected by 1.25" dust-proof grommets. Both doors are removable for easy access and lockable for added security. Cable management rings are moveable within the unit and cable tie-downs are located throughout the unit. Constructed from lightweight, sturdy 16 gauge steel for easy installation. Recommended splice tray is 11.72"L x 4"W (Ex. F1-SPL24). Splice trays not included.

PART #	DESCRIPTION	DIMENSIONS (HxWxD)	PRICE
F1-SW12T	FIS Wall Mount Splice Enclosure, 12 Trays, Top/Side Entry	17.25" x 21.25" x 4.68"	\$330.00

1RU CABLE MANAGEMENT ENCLOSURE

The FIS 1RU Slack Cable Management Enclosure provides a secure, dedicated space for fiber optic cable slack storage. The slide out tray and removable doors provide easy access when managing fiber. Comfortably route and store up to 25 meters of 3.0mm simplex fiber around the semi-circular slack management rings.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-RM1RUSCM	1RU Slack Cable Management Enclosure, Black	1.75" x 17" x 14"	\$133.00



F1-RM1RUSCM

FIS INSIDE PLANT (ISP) SLACK BOX

The ISP Slack Box is designed to easily store and protect bulk excess fiber cable. This wall mountable enclosure is 14.64" (W) x 3.31" (D) x 14.15" (H) and can hold up to 70mtr of 7.5mm cable. Two cable entries on the top and bottom of the closure along with four half circle cable management rings allows you to store cable with ease.

PART #	DESCRIPTION	DIMENSIONS (HxWxD)	PRICE
F1ISPSLACK	FIS Indoor Cable Slack Box, holds up to 70mtr of 7.5mm Cable	14.15" x 14.46" x 3.31"	\$126.00



F1ISPSLACK


FIS L-SHAPED BRACKET

This L-Shaped Bracket is designed to be mounted almost anywhere in existing enclosures where small count fibers are needed. It can hold up to (2) LGX style adapter plates.

PART #	DESCRIPTION	DIMENSIONS (HxWxD)	PRICE
F1AB2X	Adapter Plate Bracket, Holds (2) LGX Adapter Plates-Black	3" x 5.25" x 1"	\$11.50



F1AB2X

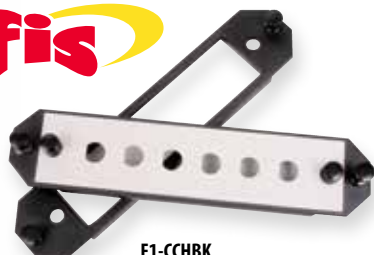

F1-CCHBK

FIS UNIVERSAL MOUNTING BRACKET FOR CORNING WCH AND CCH BOXES

FIS offers a Universal Mounting Bracket that allows installers to use LGX style adapter plates in Corning CCH and PCH series closures. When original manufacturers' plates are not available, technicians can install this universal mounting bracket and utilize an LGX adapter plate. It also supports FIS LGX patch & splice and MTP/MPO cassettes.

PART #	DESCRIPTION	PRICE
F1-CCHBK	Universal Mounting Bracket for Corning PCH and CCH Boxes (LGX Adapter Plate Not Included)	\$3.99
F1-CCHBKASS	Universal Mounting Bracket for Corning PCH and CCH Boxes (LGX Cassettes Not Included)	\$3.99

FIS LGX ADAPTER PLATES

All FIS Adapter Plates are LGX compatible. An LGX adapter plate measures 5.1" long by 1.13" high with an on center post width of 4.64".

SC PLATE AND ADAPTERS

OFF WHITE PART #	BLACK PART #	DESCRIPTION	PRICE
F1-SC6U	F1-SC6IUBK	SC 6 Pack, Unloaded	\$2.75
F1-DSC6U	F1-DSC6IUBK	SC Duplex 6 Pack, Unloaded	2.75
F1-SC3DSUL	F1SC3DBKSUL	SC Duplex 3 Pack, Loaded, Singlemode, Blue Adapters, 6 Fibers	16.50
F1-SC3DAPCSUL	F1SC3DBKAPCSUL	SC Duplex 3 Pack, Loaded, Singlemode, Green Adapters, 6 Fibers	16.50
F1-SC3DAQMUL	F1SC3DBKAQMUL	SC Duplex 3 Pack, Loaded, Multimode, Aqua Adapters, 6 Fibers	16.50
F1-SC6MUL	F1-SC6IBKMUL	SC 6 Pack, Loaded, Multimode, Beige Adapters	19.50
F1-SC6SUL	F1-SC6IBKSUL	SC 6 Pack, Loaded, Singlemode, Blue Adapters	19.50
F1-SC6APCUL	F1-SC6IBKAPCUL	SC 6 Pack, Loaded, Singlemode, APC, Green Adapters	19.50
F1SC8APCUL	F1SC8BKAPCUL	SC 8 Pack, Loaded, Singlemode, APC, Green Adapters	20.50
F1-SC6DMUL	F1-SC6DBKMUL	SC Duplex 6 Pack, Loaded, Multimode, Beige Adapters, 12 Fibers	21.50
F1-SC6DAQUL	F1-SC6DAQBKUL	SC Duplex 6 Pack, Loaded, Multimode, OM3, Aqua Adapters, 12 Fibers	21.50
F1-SC6DSUL	F1-SC6DBKSUL	SC Duplex 6 Pack, Loaded, Singlemode, Blue Adapters, 12 Fibers	21.50
F1-SC6DAPCUL	F1-SC6DBKAPCUL	SC Duplex 6 Pack, Loaded, Singlemode, APC, Green Adapters, 12 Fibers	21.50

LC PLATE AND ADAPTERS

OFF WHITE PART #	BLACK PART #	DESCRIPTION	PRICE
F1-LC3DSUL	F1LC3DBKSUL	LC Duplex 3 Pack, Loaded, Singlemode, Blue Adapters, 6 Fibers	\$16.50
F1-LC3DAPCSUL	F1LC3DBKAPCSUL	LC Duplex 3 Pack, Loaded, Singlemode, Green Adapters, 6 Fibers	16.50
F1-LC3DAQMUL	F1LC3DAQBKUL	LC Duplex 3 Pack, Loaded, Multimode, Aqua Adapters, 6 Fibers	16.50
F1-LC6DSUL	F1-LC6DBKSUL	LC Duplex 6 Pack, Loaded, Singlemode, Blue Adapters, 12 Fibers, Square Adapter	21.50
F1-LC6DAPCUL	F1-LC6DBKAPCSUL	LC Duplex 6 Pack, Loaded, Singlemode, APC, Green Adapters, 12 Fibers	21.50
F1-LC6DMUL	F1-LC6DBKMUL	LC Duplex 6 Pack, Loaded, Multimode, Beige Adapters, 12 Fibers, Square Adapter	21.50
F1-LC6DAQUL	F1-LC6DBKAQUL	LC Duplex 6 Pack, Loaded, Multimode, OM3, Aqua Adapters, 12 Fibers	21.50
F1-LC3QSUL	F1LC3QBKSUL	LC Quad 3 Pack, Loaded, Singlemode, Blue Adapters, 12 Fibers	27.25
F1-LC3QAPCSUL	F1LC3QBKAPCSUL	LC Quad 3 Pack, Loaded, Singlemode, Green Adapters 12 Fibers	27.25
F1-LC3QAQMUL	F1LC3QBKAQMUL	LC Quad 3 Pack, Loaded, Multimode, OM3 Aqua Adapters, 12 Fibers	27.25
F1-LC24DSUL	F1LC24DBKSUL	LC Duplex 12 Pack, Loaded, Singlemode, Blue Adapters, 24 Fibers	31.50
F1-LC24DAPCSUL	F1LC24DBKAPCSUL	LC Duplex 12 Pack, Loaded, Singlemode, Green Adapters, 24 Fibers	31.50
F1LC24DAQMUL	F1LC24DAQBKUL	LC Duplex 12 Pack, Loaded, Multimode, Aqua Adapters, 24 Fibers	31.50
F1-LC24SUL	F1-LC24BLKSUL	LC Quad 6 Pack, Loaded, Singlemode, Blue Adapters, 24 Fibers	45.00
F1-LC24MUL	F1-LC24BLKMUL	LC Quad 6 Pack, Loaded, Multimode, Beige Adapters, 24 Fibers	45.00
F1-LC24DAQMUL	F1-LC24AQBKUL	LC Quad 6 Pack, Loaded, Multimode, OM3, Aqua Adapters, 24 Fibers	45.00

ST PLATE AND ADAPTERS

OFF WHITE PART #	BLACK PART #	DESCRIPTION	PRICE
F1-ST6U	F1-ST6UBK	ST 6 Pack, Unloaded	\$2.75
F1-ST6LSUL	F1-ST6BKSUL	ST 6 Pack, Loaded, Singlemode	19.50
F1-ST6LMUL	F1-ST6BKMUL	ST 6 Pack, Loaded, Multimode	19.50
F1-ST8U	F1-ST8UBK	ST 8 Pack, Unloaded	2.75
F1-ST8LSUL	F1-ST8BKSUL	ST 8 Pack, Loaded, Singlemode	21.25
F1-ST8LMUL	F1-ST8BKMUL	ST 8 Pack, Loaded, Multimode	21.25
F1-ST12UL	F1-ST12UBK	ST 12 Pack, Loaded, Singlemode	24.00
F1ST12MUL	F1ST12MULBK	ST 12 Pack, Loaded, Multimode	24.00

FC PLATE AND ADAPTERS

OFF WHITE PART #	BLACK PART #	DESCRIPTION	PRICE
F1-FC6U	F1-FC6UBK	FC 6 Pack, Unloaded	\$2.75
F1-FC6MUL	F1-FC6BKMUL	FC 6 Pack, Loaded, Multimode	28.00
F1-FC6SUL	F1-FC6BKSUL	FC 6 Pack, Loaded, Singlemode	28.00
F1-FC6APCUL	F1-FC6BKAPCUL	FC 6 Pack, Loaded, Singlemode, APC	28.00

OTHER STYLE PLATE AND ADAPTERS

OFF WHITE PART #	BLACK PART #	DESCRIPTION	PRICE
F1-BLANKU	F1-BLANKUBK	Blank Plate with No Holes (Unloaded)	\$4.50
F1-MTP6MUL	F1-MTP6BKMUL	MTP 6 Pack Plate Loaded with Adapters	50.00
F1SC6APCUL45	F1SC6APCBKUL45	SC 6 Pack (APC Singlemode – Loaded) Green Adapters, Ports Angled 45°	22.00
F1LC6DAQUL45	F1LC6DAQBKUL45	LC Duplex 6 Pack (10 Gig) 12 Fibers Aqua Adapters, Ports Angled 45°	27.00



F1-SC3DBKSUL



F1-SC6DBKAPCUL



F1-LC3DAQBKUL




F1-LC24BLKSUL



F1-LC24DBKAPCSUL



F1-ST8BKSUL

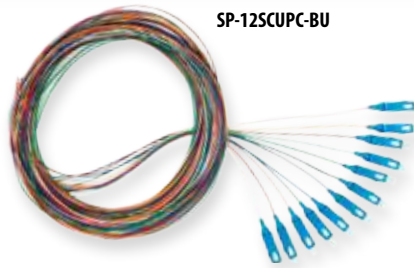

SP-12SCUPC-BU

**Quantity
Pricing
Available!**

**Multimode Pigtails
Available**



DS-P12LCUPC-BU

**LC/APC
Pigtails Now
Available**



900µm FIBER PIGTAILS - 6 AND 12 FIBER PACKS

These 900µm Tight Buffer pigtails are designed for high fiber count splicing applications and are color coded to TIA-598-A industry standards for ease of use. Pigtails are available in Singlemode or Multimode, 6-packs or 12-packs, and your choice of connectors. All pigtails feature low insertion loss, low back reflection and are made with Corning® fiber. Standard length of 3 meters.

6 FIBER PIGTAILS (COLOR CODED)

PART #	DESCRIPTION	PRICE
SP-6SCUPC-BU	6 Fiber SC/UPC 900µm Style Pigtail, SM, Blue Boots	\$16.38
SP-6SCAPC-GR	6 Fiber SC/APC 900µm Style Pigtail, SM, Green Boots	16.72
SP-6SCMM-BG	6 Fiber SC/PC 900µm Style Pigtail, MM 62.5µm, Beige Boots	13.81
SP-6SCMM50-BLK	6 Fiber SC/PC 900µm Style Pigtail, MM 50µm, Black Boots	14.50
SP-6SCMM50G-AQ	6 Fiber SC/PC 900µm Style Pigtail, OM3 MM 50µm, Aqua Boots	13.97
SP-6LCUPC-BU	6 Fiber LC/UPC 900µm Style Pigtail, SM, Blue Boots	17.25
SP-6LCMM-BG	6 Fiber LC/PC 900µm Style Pigtail, MM 62.5µm, Beige Boots	15.53
SP-6LCMM50G-AQ	6 Fiber LC/PC 900µm Style Pigtail, OM3 MM 50µm, Aqua Boots	15.53
SP-6STUPC-BU	6 Fiber ST/UPC 900µm Style Pigtail, SM, Blue Boots	15.34
SP-6STMM-BG	6 Fiber ST/PC 900µm Style Pigtail, MM 62.5µm, Beige Boots	13.81
SP-6STMM50-BLK	6 Fiber ST/PC 900µm Style Pigtail, MM 50µm, Black Boots	21.45

12 FIBER PIGTAILS (COLOR CODED)

PART #	DESCRIPTION	PRICE
SP-12SCUPC-BU	12 Fiber SC/UPC 900µm Style Pigtail, SM, Blue Boots	\$30.70
SP-12SCAPC-GR	12 Fiber SC/APC 900µm Style Pigtail, SM, Green Boots	33.47
SP-12SCMM-BG	12 Fiber SC/PC 900µm Style Pigtail, MM 62.5µm, Beige Boots	27.59
SP-12SCMM50-BLK	12 Fiber SC/PC 900µm Style Pigtail, MM 50µm, Black Boots	21.45
SP-12SCMM50G-AQ	12 Fiber SC/PC 900µm Style Pigtail, OM3 MM 50µm, Aqua Boots	27.94
SP-12LCUPC-BU	12 Fiber LC/UPC 900µm Style Pigtail, SM, Blue Boots	34.50
SP-12LCMM-BG	12 Fiber LC/PC 900µm Style Pigtail, MM 62.5µm, Beige Boots	31.06
SP-12LCMM50-BLK	12 Fiber LC/PC 900µm Style Pigtail, MM 50µm, Black Boots	23.70
SP-12LCMM50G-AQ	12 Fiber LC/PC 900µm Style Pigtail, OM3 MM 50µm, Aqua Boots	31.06
SP-12STUPC-BU	12 Fiber ST/UPC 900µm Style Pigtail, SM, Blue Boots	30.72
SP-12STMM-BG	12 Fiber ST/PC 900µm Style Pigtail, MM 62.5µm, Beige Boots	31.94
SP-12STMM50-BLK	12 Fiber ST/PC 900µm Style Pigtail, MM 50µm, Black Boots	21.80

DISTRIBUTION FIBER PIGTAILS - 6 AND 12 FIBERS

These Distribution fiber pigtails feature a durable outer jacket ensuring strength and protection during installations. The distribution fiber fans out into 900µm tight buffered fibers, color coded to TIA-598-A industry standards. These pigtails are available in Singlemode or Multimode, 6-packs or 12-packs, and your choice of connectors. All pigtails feature low insertion loss, low back reflection and are made with Corning® fiber. Standard length of 3 meters: 1 meter 900µm 'fan out' and 2 meter distribution 'tail'.

6 FIBER PIGTAILS (COLOR CODED)

PART #	DESCRIPTION	PRICE
DS-P6SCUPC-BU	6 Fiber SC/UPC Distribution Style Pigtail, SM, Blue Boots	\$14.95
DS-P6SCAPC-GR	6 Fiber SC/APC Distribution Style Pigtail, SM, Green Boots	15.95
DS-P6LCUPC-BU	6 Fiber LC/UPC Distribution Style Pigtail, SM, Blue Boots	16.30
DS-P6LCAPC-GR	6 Fiber LC/APC Distribution Style Pigtail, SM, Green Boots	17.50
DS-P6SCMM50G-AQ	6 Fiber SC/UPC Distribution Style Pigtail, MM, 50µm, OM3 Aqua Boots	16.25
DS-P6LCMM50G-AQ	6 Fiber LC/UPC Distribution Style Pigtail, MM, 50µm, OM3 Aqua Boots	24.90

12 FIBER PIGTAILS (COLOR CODED)

PART #	DESCRIPTION	PRICE
DS-P12SCUPC-BU	12 Fiber SC/UPC Distribution Style Pigtail, SM, Blue Boots	\$21.80
DS-P12SCAPC-GR	12 Fiber SC/APC Distribution Style Pigtail, SM, Green Boots	23.80
DS-P12LCUPC-BU	12 Fiber LC/UPC Distribution Style Pigtail, SM, Blue Boots	24.30
DS-P12LCAPC-GR	12 Fiber LC/APC Distribution Style Pigtail, SM, Green Boots	26.00
DS-P12SCMM50G-AQ	12 Fiber SC/UPC Distribution Style Pigtail, MM, 50µm, OM3 Aqua Boots	21.80
DS-P12LCMM50G-AQ	12 Fiber LC/UPC Distribution Style Pigtail, MM, 50µm, OM3 Aqua Boots	27.20

RIBBON FAN-OUT PACKS

These Ribbon fiber pigtails fan out into 900µm tight buffered fibers, color coded to TIA-598-A industry standards. Applications include terminating ribbon fiber to patch panels and enclosures, as well as V-Groove and array applications. All fan out kits feature low insertion loss, low back reflection and are made with Corning® fiber. Standard length of 3 meters: 1 meter 900µm 'fan out' and 2 meter ribbon 'tail'.

PART #	DESCRIPTION	PRICE
RF-3-BU-P-S-3-FIS-12	SM, SC/UPC - Pigtail, 3 Meters 36" Fan-out, 2 Meter Tail, 12 Fiber	\$65.00
RF-3-BA-P-S-3-FIS-12	SM, SC/APC - Pigtail, 3 Meters 36" Fan-out, 2 Meter Tail, 12 Fiber	75.00
RF-3-AU-P-S-3-FIS-12	SM, FC/UPC - Pigtail, 3 Meters 36" Fan-out, 2 Meter Tail, 12 Fiber	65.00
RF-3-AA-P-S-3-FIS-12	SM, FC/APC - Pigtail, 3 Meters 36" Fan-out, 2 Meter Tail, 12 Fiber	75.00

FIS SNAP PACKS™

These pre-terminated "Snap Pack" adapter panels provide convenience to technicians splicing into fiber distribution frames. Adapter panels are LGX compatible and can be ordered in a black or off white color. Available in 6 or 12 fiber bundles and color coded to TIA-598-A industry standards, these fiber bundles provide cable management from patch panels to splice bays. **Custom lengths and various connector styles are available, contact your FIS sales associate for more information.**

PART # (Off White)	PART # (Black)	DESCRIPTION	PRICE
F1-SC6LS-SPN	F1-SC6LS-SPN-BLK	(6) Adapters, SC/UPC, 6 Fiber Pigtail, Singlemode, 3 Meters	\$60.00
F1-DSC6LS-SPN	F1-DSC6LS-SPN-BLK	(6) Duplex Adapters, SC/UPC, 12 Fiber Pigtail, Singlemode, 3 Meters	120.00
F1-SC6APC-SPN	F1-SC6APC-SPN-BLK	(6) Adapters, SC/APC, 6 Fiber Pigtail, Singlemode 3 Meters	65.00
F1-DSC6IAPC-SPN	F1-DSC6IAPC-SPN-BLK	(6) Duplex Adapters, SC/APC, 12 Fiber Pigtails, Singlemode, 3 Meters	130.00
F1-SC6LM-SPN	F1-SC6LM-SPN-BLK	(6) Adapters, SC/PC, 6 Fiber Pigtails, 62.5/125µm, 3 Meters	50.00
F1-DSC6LM-SPN	F1-DSC6LM-SPN-BLK	(6) Duplex Adapters, SC/PC, 12 Fiber Pigtail, 62.5/125µm OM1, 3 Meters	80.00
F1-DSC6LM50-SPN	F1-DSC6LM50-SPN-BLK	(6) Duplex Adapters, SC/PC, 12 Fiber Pigtails, 50/125µm, 3 Meters	50.00
F1-DSC6LM50G-SPN	F1-DSC6LM50G-SPN-BLK	(6) Duplex Adapters, SC/PC, 12 Fiber Pigtails, 50/125µm OM3 10G, 3 Meters	50.00
F1-LC6DL-SPN	F1-LC6DL-SPN-BLK	(6) Duplex Adapters, LC/UPC, 12 Fiber Pigtail, Singlemode, 3 Meters	120.00
F1-LC6DLM-SPN	F1-LC6DLM-SPN-BLK	(6) Duplex Adapters, LC/PC, 12 Fiber Pigtails, 62.5/125µm, 3 Meters	80.00
F1-LC6DLM50-SPN	F1-LC6DLM50-SPN-BLK	(6) Duplex Adapters, LC/PC, 12 Fiber Pigtails, 50/125µm OM2, 3 Meters	80.00
F1-LC6DLM50G-SPN	F1-LC6DLM50G-SPN-BLK	(6) Duplex Adapters, LC/PC, 12 Fiber Pigtails, OM3 10G, 3 Meters	80.00
F1-LC6QDAPC-SPN	F1-LC6QDAPC-SPN-BLK	(6) Quad Adapters, LC/APC, 24 Fiber Pigtails, Singlemode, 3 Meters	195.00
F1-ST6LS-SPN	F1-ST6LS-SPN-BLK	(6) Adapters, ST, 6 Fiber Pigtail, Singlemode, 3 Meters	60.00
F1-ST6LM-SPN	F1-ST6LM-SPN-BLK	(6) Adapters, ST, 6 Fiber Pigtail, 62.5/125µm OM1, 3 Meters	50.00



RF-3-BU-P-S-3-FIS-12



F1-SC6LS-SPN



FT01L03



FT04L12

SUMITOMO ELECTRIC PRECISIONFLEX™ SLIDING PATCH PANEL

Sumitomo Electric Lightwave's 4th Level® sliding patch panels are specifically designed for the flexibility to house high density cassettes or LGX cassettes/ interconnect panels by choosing either high density or LGX faceplates. A wide range of cable management options provide a variety of solutions and versatility for your particular application. The ideal choice for data center, storage area network (SAN), local area network (LAN), and central office/ headend applications, 4th Level™ panels facilitate easy installation, fiber access and maintenance for years of worry free service. Mounting brackets allow for forward and backward adjustment within a standard 19" relay rack or cabinet. These panels also feature a rugged construction with a user friendly design for no hassle installations.

PART #	DESCRIPTION	(HxWxD)	PRICE
FT01L03	Precisionflex™ 1RU Patch Panel; Holds 3 Fox™ Cassettes or 3 LGX Adapter Panels. Capacity = 72LC/36SC Adapters	17" x 14.75" x 1.75"	\$205.35
FT02L06	Precisionflex™ 2RU Patch Panel; Holds 6 Fox™ Cassettes or 6 LGX Adapter Panels. Capacity = 144LC/72SC Adapters	17" x 14.75" x 3.5"	245.55
FT03L09	Precisionflex™ 3RU Patch Panel; Holds 9 Fox™ Cassettes or 9 LGX Adapter Panels. Capacity = 216LC/108SC Adapters	17" x 14.75" x 5"	273.25
FT04L12	Precisionflex™ 4RU Patch Panel; Holds 12 Fox™ Cassettes or 12 LGX Adapter Panels. Vertically. Capacity = 288LC/144SC Adapters	17" x 14.75" x 7"	280.25

* LGX Plates See Page 14 - Call or visit www.fiberinstrumentsales.com for Sumitomo LGX or Fox Cassettes.



WME-02



FM001029-BE



FM001038-BE



FM003465

AFL WALL MOUNT ENCLOSURES

AFL's wall mount interconnect enclosures provide a convenient convergence point for interconnecting and/or splicing in wall mount applications. Provisioned for LGX compatible adapter plates or optical modules, the enclosure features a well-engineered solution for fiber and cable management on both the ingress and egress openings of the enclosure.

PART #	DESCRIPTION	(HxWxD)	PRICE
WME-02E	AFL Wall Mount Enclosure, Holds up to (2) LGX Adapter Plates	12.0" x 14.0" x 2.5"	\$105.00
WME-04E	AFL Wall Mount Enclosure, Holds up to (4) LGX Adapter Plates	12.0" x 14.0" x 3.63"	165.35

AFL FIBER TERMINATION PATCH PANELS

AFL's fiber termination panels are designed for use as a rack mount interconnect panel and feature universal 19/23" EIA/TIA rack compatibility. They are LGX compatible with industry standard adapter plates and cassettes.

PART #	DESCRIPTION	(HxWxD)	PRICE
FM001038-BE	AFL Patch Panel, 1RU, Holds up to (3) LGX Adapter Plates	1.75" x 17" x 13.51"	\$235.00
FM001029-BE	AFL Patch Panel, 2RU, Holds up to (6) LGX Adapter Plates	3.5" x 17" x 13.51"	268.00
C211372-BE	AFL Patch Panel, 4RU, Holds up to (12) LGX Adapter Plates	7" x 17" x 11"	368.00

AFL LGX ADAPTER PLATES

AFL adapter plates are compatible with LGX industry standard platforms allowing for easy upgrades within existing panels. Adapter plates come preloaded with mating sleeves and are available in 6, 12 and 24 port configurations.

PART #	DESCRIPTION	PRICE
FM003104	LGX Adapter Plate, Simplex ST, MM, 6 Fiber	\$27.95
FM003126	LGX Adapter Plate, Duplex ST, SM, 12 Fiber	49.95
FM003096	LGX Adapter Plate, Simplex SC, MM, 6 Fiber	34.25
FM003100	LGX Adapter Plate, Simplex SC, SM, 6 Fiber	34.25
FM003293	LGX Adapter Plate, Duplex SC, MM, 12 Fiber	50.95
FM003297	LGX Adapter Plate, Duplex SC, SM, 12 Fiber	53.00
FM003295	LGX Adapter Plate, Duplex SC, MM (OM3 and OM4), 12 Fiber	53.00
FM003420	LGX Adapter Plate, Simplex FC, SM/MM, 6 Fiber	36.95
FM003110	LGX Adapter Plate, Duplex LC, MM, 12Fiber	58.95
FM003465	LGX Adapter Plate, Duplex LC, SM, 12 Fiber	58.95
FM003208	LGX Adapter Plate, Quad LC, SM, 24 Fiber	108.00
FM003206	LGX Adapter Plate, Quad LC, MM (OM3 and OM4), 24 Fiber	112.95



ASCEND

Fiber solutions for Fanout, Splice, Patch, Conversion and Tap applications

For more information, contact your FIS Sales Representative.



AFLglobal.com/ASCEND

CORNING offers enterprise network complete tip-to-tip fiber optic product solutions. CORNING hardware products include CCH housing panels, CCH & PCH rack mounts, WSH wall mounts and splice trays.

CORNING® WALL MOUNT ENCLOSURES

These metal cabinet units are suitable for loose tube and tight-buffered fiber optic cables. Enclose your fiber optic connections and, for extra protection, locking kits are available for purchase. Accepts CCH panels only. Does not accept any splice trays or holders including the CORNING® M67 splice tray series. ***Adapter Panels and Cassettes not included.**

PART #	DESCRIPTION	(HxWxD)	PRICE
SPH-01P	6 Fiber Wall Mount (1) CCH Adapter Panel	6.3" x 5.5" x 2.0"	\$85.85
WCH-02P	12 Fiber Wall Mount, Up to (2) CCH Adapter Panels	9.25" x 13.25" x 3.25"	135.00
WCH-04P	24 Fiber Wall Mount, Up to (4) CCH Adapter Panels	13.5" x 16" x 4"	201.35
WCH-06P	48 Fiber Wall Mount, Up to (6) CCH Adapter Panels	13.5" x 16" x 4"	266.70
WCH-CLSSC12P	144 Fiber Wall Mount, Up to (12) CCH Adapter Panels	13.5" x 22.5" x 5"	568.00

CORNING® WALL MOUNT SPLICE HOUSINGS

The CORNING® WSH is designed to store fibers being spliced within the unit. The front door doubles as a work surface that can support the weight of a fusion splicer. Multiple cable entry/exit ports are provided on each side in addition to top and bottom. Grounding kits are available for purchase separately.

PART #	DESCRIPTION	(HxWxD)	PRICE
WSH-11SPTF	Wall Mount Splice Housing, Up to 11 Trays (Type 4S, 4R or 4A)	13.5" x 22.5" x 5.2"	\$340.00
WSH-16SPT	Wall Mount Splice Housing, Up to 16 Trays (Type 2S, 2R or 2M)	13.5" x 22.5" x 5.2"	345.00

CORNING® CONNECTOR HOUSING

Closet connector housings (CCHs) provide interconnect or cross-connect capabilities between outside plant, riser or distribution cables and opto-electronics. The 1U, 2U and 4U options feature a slide-out tray and see-through, removable top covers. The housings accept CCH connector panels, cassettes and modules. *** Adapter Panels and Cassettes not included**

PART #	DESCRIPTION	(HxWxD)	PRICE
CCH01U	Corning CCH Closet Connector Housing accepts 2 CCH panels	1.75" x 19" x 17"	\$277.50
CCH02U	Corning CCH Closet Connector Housing accepts 4 CCH panels	3.5" x 19" x 17"	340.00
CCH04U	Corning CCH Closet Connector Housing accepts 12 CCH panels	7" x 19" x 17"	495.00

CORNING® PRETIUM™ CONNECTOR HOUSING

CORNING® PCH housings are four inches deeper than standard CCH housings for installing splice tray holding option. PCH-04 series contains an integral hinged jumper manager on the front of the housing. The PCH-01U housing has a removable top that slides forward with simple release providing access to interior components. Accepts CCH cassettes and panels. ***Adapter Panels and Cassettes not included.**

PART #	DESCRIPTION	(HxWxD)	PRICE
PCH-01U	12 Fiber, 1U - accepts (2) CCH panels	1.75" x 17" x 16"	\$417.35
PCH-02U	24 Fiber 2U - accepts (4) CCH panels	3.5" x 17" x 16.5"	506.00
PCH-04U	72 Fiber, 4U - accepts (12) CCH panels	7" x 17" x 16"	725.00
PC1-SPLC-04R	Splice Tray Bracket for PCH-01U, accepts (4) type 2S trays or (2) type 4R trays. (See Below)		55.50
PC2-SPLC-6SR	Splice Tray Bracket for PCH-02U, accepts (6) 2R/2S or (3) 4R/4S trays. (See Below)		44.50
PC4-SPLC-12SR	Splice Tray Bracket for PCH-04U, accepts (12) type 2S or (7) type 4S trays. (See Below)		228.60

CORNING® ADAPTER PANELS FOR CCH, WCH AND EDC SERIES

The Closet Connector Housing (CCH) panels are available in a variety of adapter styles for use with CORNING enclosures. Manufactured from steel, they are designed to be robust. Choose from the selection below or ask an FIS representative for other configurations.

PART #	DESCRIPTION	PRICE
CCH-CP12-15T	Twelve ST MM, Ceramic Insert	\$75.00
CCH-CP12-19T	Twelve ST SM, Ceramic Insert	85.55
CCH-CP12-91	Six Duplex SC MM, Metal Insert	73.50
CCH-CP12-59	Six Duplex SC SM, Ceramic Insert	97.50
CCH-CP12-E7	Six Duplex SC, 10 Gig - Aqua	91.00
CCH-CP12-A9	Six Duplex LC SM, UPC, Ceramic Insert	105.60
CCH-CP24-A9	Twelve Duplex LC SM, UPC, Ceramic Insert	226.70
CCH-CP12-E4	Six Duplex LC, 10 Gig - Aqua	101.35
CCH-CP24-E4	Twelve Duplex LC, 10 Gig - Aqua	213.35

CORNING® SPLICE TRAYS

Designed for use with CORNING® interconnection hardware and splice closures, these splice trays are an integral part of a complete splicing system. The trays are engineered for use with indoor or outdoor splice hardware with both loose tube and tight-buffered optical cables.

PART #	DESCRIPTION	PRICE
M67-081	Splice Tray, Type 2S, Twelve Heat Shrink Sleeves	\$48.60
M67-110	Splice Tray, Type 4R, Twelve Heat Shrink or 6 Ribbon Shrink, For CORNING Wall Mounts	42.00
M67-112	Splice Tray, Type 2S, Twenty Four Heat Shrink Sleeves	45.35
M67-087	Splice Tray, Type 4S, Twelve Mechanical Camsplice Splices	44.95
M67-076	Splice Tray, Type 4S, Twelve Fusion Splices, For CORNING Rack Mountable Housings	49.35
M67-048	Splice Tray, Type 2S, Twelve Fusion Splices, For CORNING Splice Closures	45.95
SCFST077	Corning Universal Splice Tray	36.75

CORNING



WCH-02P




WSH-16SPT



CCH01U



PCH-04U



CCH-CP12-91



M67-048

.2"(H) x 13.25"(W) x 3.9(D)



MOLEX COMPACT WALL MOUNT

This low profile wall mount enclosure is constructed of white rugged plastic and provides internal fiber management options. It accepts up to eight fusion or mechanical splices. The included accessory kit contains mounting screws, an identification label and two cable ties.

PART #	DESCRIPTION	(HxWxD)	PRICE
WFR-00010-02	6 Port, ST, SM/MM, White, Loaded	7.25" x 5" x 1.5"	\$41.95
WFR-00030-02	6 Port, Simplex SC, Duplex LC, White, Unloaded	7.25" x 5" x 1.5"	25.00
WFR-00028-02	8 Ports, Duplex SC, MM, White, Loaded	7.25" x 5" x 1.5"	65.00
WFR-00029-02	8 Ports, Duplex SC, SM, White, Loaded	7.25" x 5" x 1.5"	90.75



FIS COMPACT WALL BOX

Utilize this compact wall mount box for fusion splice sleeve storage or direct connector termination. Simply place two small cable ties through the back of the box, slide the cable (max 5mm OD) into the box and secure. Next use the small cable management spool to store some slack prior to splicing or termination. There are two knock-out slots on each side of the box for (2) SC simplex or LC duplex adapters. There are also two knock-out slots on each side of the box for (1) SC duplex or LC quad adapter. Adapters without flanges are required. Built in splice sleeve holders accommodate up to two 40mm heat shrink splice sleeves.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-CWB02	FIS Compact Wall Box, White	4" x 3.25" x 1"	\$16.95



FIS SPLICE ENCLOSURE

The FIS splice enclosure utilizes a 12 position molded splice chip to secure splices. It is wall mountable and recommended for installation within controlled environments. Cable entry grommets secure incoming and outgoing cable with an outer diameter between 7mm and 12mm. Internal fiber management guides provide the ability to coil excess fiber.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-4868-FSS	Fusion Splice Enclosure (up to 7mm cable diameter)	6.75" x 4.75" x 2.125"	\$52.25
F1-4868-MSS	Mechanical Splice Enclosure (up to 7mm cable diameter)	6.75" x 4.75" x 2.125"	52.25
F1-4868-FLL	Fusion Splice Enclosure (7mm to 12mm cable diameter)	6.75" x 4.75" x 2.125"	52.25
F1-4868-MLL	Mechanical Splice Enclosure (up to 7mm cable diameter)	6.75" x 4.75" x 2.125"	52.25



FIS 4 PORT WALL MOUNT

The FIS 4 Port Wall Mount box is a compact design ideal for data center applications. It can be wall mounted or placed in a floor box, and will house up to 4 fibers, inline adapters and pigtails. Cables are easily terminated or spliced together. This wall mount box also has options for incoming fiber to be presented via mini-trunking grommets. Adapters and splice chip sold separately.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-WM4PW	4 Port, Holds (4) ST/FC Adapters, Unloaded	6.5" x 5" x 1.5"	\$14.25
F1-WM4S	8 or 16 Port, Holds (4) Duplex SC or (4) Quad LC Adapters, Unloaded	6.5" x 5" x 1.5"	17.50



PLP COYOTE WALL MOUNT MULTI-PURPOSE CLOSURE (MPC)

A versatile high performance demarcation closure for indoor or outdoor applications. With its unique interior grid pattern the MPC allows for custom configuration and mounting of a wide array of components. NEMA 4 rated and supplied with knockouts for up to 8 entry points. Contact an FIS sales representative for custom configurations. Bulkhead kit is compatible with PLP adapter plates (not LGX compatible).

PART #	DESCRIPTION	(HxWxD)	PRICE
COYMP-000	COYOTE Standard MPC (Empty)	16" x 14" x 4"	\$113.95
COYMP-D000	COYOTE Deep MPC (Empty)	16" x 14" x 8"	167.00
80808618	Stepped Grommet Kit, Bag of 4 (.07" - 1.0")		17.00
80808916	Empty Bulkhead Kit for Standard or Deep MPC, Accepts 2 Adapter Modules		13.50
80808960	Empty Bulkhead Kit for Deep MPC ONLY - Accepts 4 Adapter Modules		23.50
8003814	Splice Platform for Single Fusion splices		14.80

CORNING

Also Suitable
for
Outdoor Use!



CORNING® ENVIRONMENTAL DISTRIBUTION CENTER (EDC)

CORNING® EDC product family continues to set the standard for the future of interconnect hardware. These units are designed for the protection of fiber optic connections and splices in indoor or outdoor environments; the EDC is ideal for industrial, marine, security, or traffic control applications. The EDC series accepts CCH panels and splice trays. Does not accept CCH cassettes. No entry holes provided on EDC series cabinets. NEMA 4X Rated. Also Available in Stainless Steel.

PART #	DESCRIPTION	(HxWxD)	PRICE
EDC-02PNH	Accepts 2 CCH Adapter Panels	12.5" x 10.5" x 6.25"	\$495.00
EDC-06PNH	Accepts 6 CCH Adapter Panels	16.5" x 14.5" x 8.3"	705.00
EDC-12PNH	Accepts 12 CCH Adapter Panels	18.6" x 16.6" x 10.3"	1,025.00
EDC-2N4-KIT	Two NEMA 4 Rated Conduit Fittings for Two-Inch Conduit		128.75
EDC-2EC-KIT	Two Non-Rated Conduit Fittings for Two-Inch Conduit		36.95
EDC-2WT-KIT	Two Watertight Compression Fittings (not intended to mate with conduit)		56.95
HDWR-GRND-KIT	Hardware Grounding Kit: Includes Two Ground Wires, Sheath Ground Clip and Bus		55.75

FIS TITAN WALL MOUNT ENCLOSURE

The FIS Titan box is a NEMA 4-rated industrial-style wall mount suitable for ISP or OSP environments. It includes a detachable master panel, (4) cable managers, splice tray riser, cable securement, and a back panel (16" x 6") with 96 mounting holes for layout customization, accommodating up to (12) LGX adapter panels with a total capacity of 144 (288 LC) fibers. (2) PG29 Cable grommets accept an outer diameter of 18-25mm. In addition to being wall mountable, there is a pole mount option available. **LGX adapter plates not included, see page 70.**

PART #	DESCRIPTION	(HxWxD)	PRICE
F1TITAN	Titan Wall Mount with backing plate, cable management, splice tray riser and master panel (144 fiber), Off-White	23.86" x 25.1" x 7.48"	\$515.00
F1TSPOLEMOUNT	FIS Titan Series Pole Mount Kit		\$45.00



F1TITAN

FIS TITAN MINI WALL MOUNT ENCLOSURE

The FIS Titan Mini box is a NEMA 4-rated industrial-style wall mount suitable for ISP or OSP environments. It includes a detachable master panel, (2) cable managers, splice tray riser, cable securement, and a back panel (12" x 8") with 55 mounting holes for layout customization, accommodating up to (4) LGX adapter panels with a total capacity of 48 (96 LC) fibers. (2) PG21 cable grommets can accept a cable with an outer diameter of 9-16mm. In addition to being wall mountable, there is a pole mount option available. **LGX adapter plates not included, see page 70.**

PART #	DESCRIPTION	(HxWxD)	PRICE
F1TITANMINI	Titan Mini Wall Mount, 2 plates, Off-White	14.25" x 14.485" x 4.90"	\$260.00
F1TSPOLEMOUNT	FIS Titan Series Pole Mount Kit		\$45.00



F1TITANMINI

FIS HELIOS OUTDOOR WALL MOUNT ENCLOSURE

The FIS Helios box is a NEMA 4-rated industrial-style wall mount suitable for ISP or OSP environments. It's designed to hold (2) FIS Patch & Splice cassettes. (2) PG21 grommets can accept a cable with an outer diameter of 9-16mm. In addition to being wall mountable, there is a pole mount option available. **Patch & Splice cassettes are not included. This enclosure does not accept adapter panels.**

PART #	DESCRIPTION	(HxWxD)	PRICE
F1HELIOUS	FIS 2 Panel Outdoor Wall Mount, holds (2) FIS Patch & Splice cassettes, .090 Aluminum, NEMA 4 Rated, Lockable, Wall/Pole Mountable, Off-White	19" x 10" x 6"	\$260.00
F1TSPOLEMOUNT	FIS Titan Series Pole Mount Kit		\$45.00



F1HELIOUS

FIS CEILING MOUNT ZONE ENCLOSURE

This FIS Zone Enclosure is a ceiling-mounted 2RU, that can hold up to 144 fibers (LC). Fits in 2ft x 2ft drop ceilings. This cross-connect is intended to patch and distribute infrastructure cables from one zone to another within a dedicated network. The enclosure is equipped with a completely detachable master panel capable of accommodating (6) LGX adapter panels. Additionally, it features a back panel with 96 mounting holes arranged in a 16"x6" configuration. These two features allow you to fully customize the internal layout to meet any job requirements. Each enclosure is supplied with mounting hardware, which includes steel threaded tie wire and anchors.

PART #	DESCRIPTION (19" or 23" Rack)	(HxWxD)	PRICE
F1CEILING2RU	2RU FIS Ceiling Mount Zone Enclosure, Off-White	5" x 23.87" x 23.87"	\$325.00

F1CEILING2RU

FIS ZONE ELECTRICAL BOX OUTLET ENCLOSURE

The FIS Zone Electrical Box Outlet Enclosure attaches directly to a single gang electrical box that may be at the end of a cable pathway. A single-panel box designed to protect and house small fiber counts for patching from zone trunk cables to individual locations. Ideal for Fiber to the Desk (FTTD) and other LAN, PON, and in-building applications.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1CW1XZONE	FIS Zone Single Gang Electrical Box Outlet Enclosure, Black	5.5" x 7.5" x 1.35"	\$7.95



F1CW1XZONE

1 RU MODULAR TEST ACCESS POINT (TAP) PANEL

This 1RU modular chassis can be loaded with up to (3) Mini TAP modules, providing monitoring access for (18) access points. Each Mini TAP module has (6) monitor ports. The monitor ports are located in the rear of the unit and are protected by a removable shield. Each monitor port is pre-loaded with terminators, preventing high back reflections on SFPs and test equipment. It uses passive fiber optic couplers that are non-band specific, and the panel can be used for either High Band or Low Band connections.

PART #	DESCRIPTION (19" or 23" Rack)	(HxWxD)	PRICE
1RUCM18CPRI	1RU Modular TAP Panel, Loaded with (3) Modules, Red	1.7" x 17" x 13.5"	\$1,965.00
CPRI6RRHSPM	TAP Module, (6) Access Points Links, Use with 4RUCM or 1RUCM, Red		670.00



1RUCM18CPRI

2 RU TEST ACCESS POINT (TAP) PANEL WITH CABLE MANAGEMENT

The 2RU TAP interface drawer features integrated cable management to route incoming standard or HybriFlex cables within the enclosure. This panel provides test access for up to (6) active TAP Links. It uses passive fiber optic couplers that are non-band specific, and the panel can be used for either High Band or Low Band connections. All necessary mounting hardware, including 19" and 23" brackets are included.

PART #	DESCRIPTION	(HxWxD)	PRICE
2RUCMCPRI03	2RU Cable Mgmt Drawer w/Integrated TAP Module, Red	3.469" x 17" x 14.68"	\$1,059.00



2RUCMCPRI03

FIS SPECIALTY DUPLEX TAP PATCH CABLES

FIS specialty optical TAP duplex cable assemblies can be used in place of standard patch cable and provide non-service affecting output leg to access to live network traffic for monitoring or inspecting. Saves rack space required for splitter modules, available in different split ratios for OM4 or Singlemode fiber. Different lengths are available, indicate length at time of order.

PART #	DESCRIPTION	PRICE
X9S70LLXXFIS	TAP Duplex Cable, 70/30(2.3/6.2dB IL), LCUPC-LCUPC, Singlemode, Specify Length "xx"	Call For Pricing
X9S50LLXXFIS	TAP Duplex Cable, 50/50(3.9/3.9dB IL), LCUPC-LCUPC, Singlemode, Specify Length "xx"	Call For Pricing
X8S70LLXXFIS	TAP Duplex Cable, 70/30(2.3/6.2dB IL), LCPC-LCPC, OM4, Specify Length "xx"	Call For Pricing
X8S50LLXXFIS	TAP Duplex Cable, 50/50(3.9/3.9dB IL), LCPC-LCPC, OM4, Specify Length "xx"	Call For Pricing



X9S70LLXXFIS



F1-6707BLKF

F1-SPL12




F1-SPL12MINI

F1-SPL24XL




F1-6808

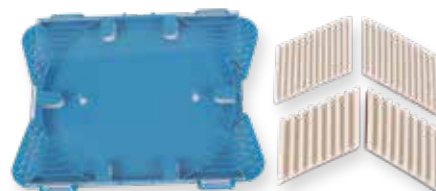


1120-SSTP

SPLICE CHIPS INCLUDED

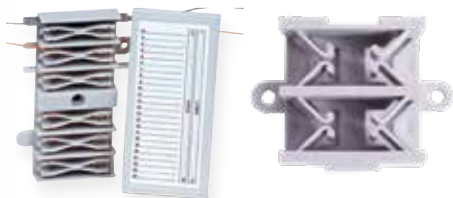

F1-8731

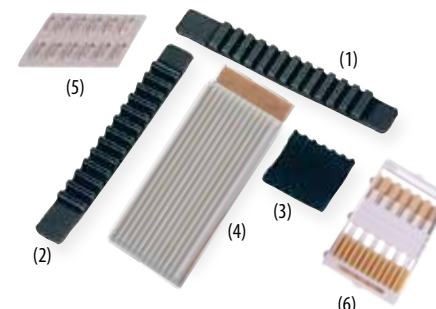

FIS ALUMINUM SPLICE TRAYS

The FIS aluminum splice trays are compact, lightweight, and available with a variety of splice holding chips and cover options. All trays are pre-configured for standard heat shrink fusion splices unless otherwise stated. Any stocked splice holder chip can be pre-loaded into this splice tray. See splice holding chip options below. Each splice tray features a mounting hole to fasten the tray down using a mounting stud and nut. Self adhesive Velcro dots are included with F1-SPL12, F1-SPL24 and F1-6707 to secure the tray in place.

PART #	DESCRIPTION	PRICE
F1-SPL12	Aluminum Splice Tray, 12 Position, Fusion Splice Chip, Rigid (6.5"L x 4.68"W x .42"H)	\$17.95
F1-SPL12MINI	Aluminum Splice Tray, 12 Position, Fusion Splice Chip, Rigid (4"L x 4"W x .42"H)	14.95
F1-SPL24	Aluminum Splice Tray, 24 Position, Fusion Splice Chip, Rigid (11.72"L x 3.99"W x .41"H)	18.95
F1-SPL24-8.5	Aluminum Splice Tray, 24 Position, Fusion Splice Chip, Rigid (8.5"L x 5"W x .42"H)	18.95
F1-SPL24XL	Aluminum Splice Tray, 24 Position, XL, Fusion Splice Chip, Rigid (10"L x 5"W x 0.41"H)	22.95
F1-SPL192	Aluminum Splice Tray, 16 Position, Mass Fusion/Ribbon Splice Chip, Rigid (11.72"L x 3.99"W x .42"H)	18.95
F1-8735C	Aluminum Splice Tray, 12 Position, Clear Plastic Cover, Fusion Splice Chip, Rigid (7.13"L x 4.13"W x .38"H)	14.75
F1-8729G	Aluminum Splice Tray, 12 Position, Clear Plastic Cover, Fusion Splice Chip, Rigid (11.75"L x 4"W x .38"H)	18.00
F1-6707BLKF	Aluminum Splice Tray, 12 Position, Fusion Splice Chip, Soft (7.5"L x 4"W x .63"H)	14.95
F1-6707BLKM	Aluminum Splice Tray, 12 Position, Mechanical Splice Chip, Soft (7.5"L x 4"W x .63"H)	14.95
F1-6707BLKR	Aluminum Splice Tray, 12 Position, Bare Fiber Splice Chip, Rigid (7.5"L x 4"W x .63"H)	16.95
F1-6707BLKH	Aluminum Splice Tray, 6 Position, Fusion Splice Chip, Rigid (7.5"L x 4"W x .63"H)	14.95

FIS PLASTIC SPLICE TRAYS

The FIS Splice Tray is injection molded using UL94 fire retardant material. The tray is designed to fit in most splice closures and can accommodate 12 fusion, mechanical, or bare fiber splices. Any stocked splice holder chip can be pre-loaded into this splice tray. See splice holding chip options below. Features include: Fiber routing molded into the tray, fiber tie down holes, snap or slide together construction, designation label, self adhesive Velcro dots to secure the tray in place, and nylon cable tie wraps.

PART #	DESCRIPTION	DIMENSIONS (LxWxH)	PRICE
F1-6808	Plastic Splice Tray, 12 Position, Fusion Splice Chip, Rigid	7.1" x 4.25" x .48"	\$11.95
F1-6808M	Plastic Splice Tray, 12 Position, Mechanical Splice Chip, Soft	7.1" x 4.25" x .48"	11.95
F1-6808BA	Plastic Splice Tray, 12 Position, Bare Fiber Fusion Splice Chip, Rigid	7.1" x 4.25" x .48"	15.95

STARFIGHTER SPLICE TRAYS

Starfighter Splice Trays are designed for use with the Multilink Starfighter series of closures. Each splice tray can accommodate single fusion, bare fusion and ribbon fusion protection sleeves as well as mechanical splices. Starfighter splice trays are durable to protect and hold your splice with confidence.

PART #	DESCRIPTION	DIMENSIONS (LxWxH)	PRICE
1120-SSTA	Aluminum Splice Tray, 12 Position, For 1120-F Closure	6.5" x 4.75" x 0.5"	\$25.25
1120-SSTP	Plastic Splice Tray, 12 Position, For 1120-F Closure	5.13" x 6.5" x 0.5"	23.95
2000-SSTA	Aluminum Splice Tray, 24 Position, For 2000-F Closure	4" x 11.75" x 0.5"	41.75
3000-SSTA	Aluminum Splice Tray, 24 Position, For 3000F Closure	6" x 7.75" x 0.5"	41.75
3030-SSTP	Plastic Splice Tray, 24 Position, For 3000-F Closure	5.75" x 8.25" x 0.5"	30.75
4048-SSTP	Plastic Splice Tray, 24 Position, For 4000-D Closure	9.75" x 4.5" x 0.5"	21.95

FIS SPLICE BRIDGES

The FIS splice support bridge is available in two basic designs. The 4 way splice bridge will accept 4 fusion or mechanical splices. It is compatible with the FIS 4 Port Wall Mount (P/N F1-WM4PW and F1-WM4S). The 24 way splice bridge will accept up to 12 mechanical or 24 fusion splices. It is supplied with a protective lid that includes a designation label. Both splice bridges have adhesive backings.

PART #	DESCRIPTION	DIMENSIONS (LxWxH)	PRICE
F1-8730	Plastic Splice Bridge, 4 Way, Accepts 4 Fusion or Mechanical Splices, Adhesive Backing	1.25" x 1.75" x .68"	\$2.95
F1-8731	Plastic Splice Bridge, 24 Way, Accepts 12 Mechanical or 24 Fusion Splices, Adhesive Backing	3.85" x 2.53" x .63"	4.25


FIS FUSION AND MECHANICAL SPLICE HOLDING CHIPS

FIS offers several styles of splice holding chips to secure splice sleeves. For chips with non-adhesive backing, use double sided tape or epoxy to adhere to mounting surfaces. Upon request FIS will install any stock splice chip in your FIS splice tray.

PART #	DESCRIPTION	PRICE
F1-6707FCM	Fusion Splice Chip, 12 Position, Soft, Non-Adhesive Backing (1)	\$1.50
F1-6707MCM	Mechanical Splice Chip, 12 Position, Soft, Non-Adhesive Backing (2)	1.50
USC-HS	Heat Shrink Splice Chip, 6 Position, Rigid, For Standard/Slim Sleeves, Adhesive Backing (3)	1.95
F1-105612	Bare Fiber Fusion Splice Chip, 12 Position, Rigid, Adhesive Backing, 12/pack (4)	76.95
FSH-LDR	Fusion Splice Chip, 12 Position, Plastic, Adhesive Backing (5)	2.95
275897-000	Raychem/Tyco Splice Chip, 12 Position, Plastic, For Use In FOSC Trays (6)	2.75

FIS: Manufacturer of Fiber Optic Enclosures

As a premier manufacturer of custom fiber optic enclosures, FIS delivers tailored solutions for your network needs.

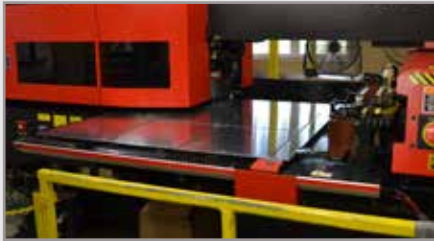

19" FLUSH MOUNT ADAPTER BRACKETS

The 19" Flush Mount Adapter Brackets are designed to reposition your enclosure from a standard position to a flush mounted depth on all FIS rack mount enclosures. When installed, these brackets move the enclosure 3.5" back in the rack, so the front of the enclosure sits flush against the rack opening. Compatible with FIS rack mount enclosures. Sold in pairs.

PART #	DESCRIPTION	PRICE
1RURACKADP19FLUSH	1RU 19" Flush Mount Rack Adapter, Black	\$14.95
1RURACKADP19FLUSHBW	1RU 19" Flush Mount Rack Adapter, Off White	14.95
2RURACKADP19FLUSH	2RU 19" Flush Mount Rack Adapter, Black	19.95
2RURACKADP19FLUSHBW	2RU 19" Flush Mount Rack Adapter, Off White	19.95
4RURACKADP19FLUSH	4RU 19" Flush Mount Rack Adapter, Black	24.95
4RURACKADP19FLUSHBW	4RU 19" Flush Mount Rack Adapter, Off White	24.95

23" MOUNTING BRACKETS

This bracket enables you to fit your 19" rack mount into a 23" wide rack. Compatible with FIS rack mount enclosures, select the appropriate size for the enclosure. Two 4RU sets are required for the 8RU rack mount enclosure. Sold in pairs.

PART #	DESCRIPTION	PRICE
1RURACKADP23	1RU 23" Rack Adapter, Black	\$14.95
1RURACKADP23BW	1RU 23" Rack Adapter, Off White	14.95
2RURACKADP23	2RU 23" Rack Adapter Black	19.95
2RURACKADP23BW	2RU 23" Rack Adapter, Off White	19.95
2RURACKADP23FLUSH	2RU 23" Flush Mount Rack Adapter, Black	19.95
2RURACKADP23FLUSHBW	2RU 23" Flush Mount Rack Adapter, Off White	19.95
4RURACKADP23	4RU 23" Rack Adapter Black	24.95
4RURACKADP23BW	4RU 23" Rack Adapter, Off White	24.95

CABLE MANAGEMENT SPOOLS

These Cable Management Spools come in a pair of two and are compatible with FIS rack and wall mount enclosures. Ideal for storing slack cable and managing incoming and outgoing fibers.

PART #	DESCRIPTION	PRICE
F1MCMB	Metal Cable Management Spool, .75" Height	\$16.75
F1PCM100	Plastic Cable Manager Spool, 1" Height	10.00
F1PCM084	Plastic Cable Manager Spool, 0.84" Height	10.00

CABLE RETENTION RINGS


Use these Cable Retention Rings to manage incoming and outgoing fibers on the front of FIS rack mount enclosures.

PART #	DESCRIPTION	PRICE
F113187	Cable Retention Rings, White, 10 Pack, 1RU & 2RU, .75" Inside	\$3.95
F113189	Cable Retention Rings, White, 10 Pack, 4RU & 8RU, 1.0" Inside	3.95

ALUMINUM INTERLOCKING ARMOR (AIA) GROUNDING KIT

This grounding and bonding kit provides a grounding point for aluminum interlocking armor cable. It uses a 6 AWG insulated, high-flex grounding wire at 18" long. The included grounding clamps attach to both ends of a cable with an outside diameter ranging from 11.5mm to 16.0mm.

PART #	DESCRIPTION	PRICE
F1-GRBOKIT	FIS Aluminum Interlocking Armor Grounding and Bonding Kit	\$35.00

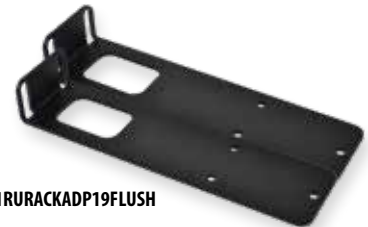

1RURACKADP19FLUSH



1RURACKADP23



F1-MCMB

F1PCM100



F113187



F1-GRBOKIT




Cabinet Shown
with Enclosures

F1SR42RUTAPFIS1200

- Kitting Available with Fiber Enclosures, Splice Cabinets, and Cable Management
- Multiple Size Options
- Removable Side Panels
- Silk Screen Numbered Rails
- Steel Construction
- Optional Accessories Available

OPTIONAL ACCESSORIES



Horizontal Cable Manager
(F1FMP1RUCABMANH)



Vented Cantilever Shelf
(F1RM1RUCANTILSHELF)

FIS SERVER/NETWORK CABINETS

Server cabinets are designed to accommodate data center requirements for network switches and other applications like audio/video components. Features vented doors, adjustable mounting rails with silk screened numbers, optional casters and top exhaust fans for optimal temperature control. These cabinets are offered in both 47RU and 42RU construction with removable side panels for pairing cabinets.

Networking cabinets have increased width of 31.5" and length of 39.3" to accommodate vertical cable management on either side and cable entry at the top and bottom of the cabinet. The length of the cabinet provides room for servers as well.

PART #	DESCRIPTION	OVERALL	
		DIMENSIONS (HxWxD)	PRICE
F1SR42RUTAPFIS	Server Cabinet, 4 Post, 42RU Height, Steel Construction, Black, 2,000lbs load capacity (levelers)	80" x 23.5" x 46"	\$1,750.00
F1SR42RUTAPFIS1200	Server Cabinet, 4 Post, 42RU Height, Steel Construction, Black, 1,200lbs load capacity (casters)	80" x 23.5" x 46"	1,750.00
F1SR42RUTAPFIS2400	Server Cabinet, 4 Post, 42RU Height, Steel Construction, Black, 2,400lbs load capacity (large casters/levelers)	80" x 23.5" x 46"	1,995.00
FPSR42RU3000	FIS Server Rack Cabinet, 4 Post, 42RU, Black, Heavy Duty 3000 lbs Casters, Lockable Smoked Plexiglass Doors, Dust Resistant cable access openings	80" x 30" x 30"	3,200.00
F1RTF1000	Top Mount Cooling Fans, 4 High Output Fans w/ 6ft power Cord for Server Cabinet		115.00
F1FMP1RUCABMANH	FIS 1RU Flush Mount, Horizontal Cable Manager		50.00
F1RM1RUCANTILSHELF	FIS 1RU Vented Cantilever Shelf (16 inch depth)		50.00

19" ALUMINUM OPEN FRAME RACK

These 2-Post Floor Mount Racks offer space saving convenience for mounting data and telecommunications equipment. Racks are numbered with rack units and tapped for #12-24 mounting screws. Additional units are available in 3ft and 4ft. heights. Call your FIS sales representative for details on shipping and racks not listed below.

PART #	DESCRIPTION	OVERALL DIMENSIONS (HxWxD)	PRICE
F1FR45RU2PTAP	2 Post Open Floor Rack, 45RU, 19" Rack Mounting, Steel, Tapped Holes	83.71" x 23.23"	\$195.00
F1FR45RU4PTAP	4 Post Open Floor Rack, 45RU, 19" Rack Mounting, Steel, Tapped Holes	83.71" x 23.62" x 29.53"	290.00
F1FR45RU4PSH	4 Post Open Floor Rack, 45RU, 19" Rack Mounting, Steel, Square Holes	83.71" x 23.62" x 29.53"	290.00

WALL MOUNT ENCLOSURES

Wall Mount Enclosures offer a locking front door that is reversible for left or right side opening. Its swing out feature allows easy access to the back of equipment with a key lock to prevent tampering. Enclosures have vented fixed side panels for better air flow and pre-installed 110VAC 80CFM cooling fans to keep equipment running cool. It also includes adjustable cage nut rails and cage nuts with standard #12-24 mounting screws. Rails are marked with RU space index. Enclosure ships fully assembled. Additional enclosures are available with 20RU and 28RU heights. Call your FIS sales representative for details on shipping and enclosures not listed below.

PART #	DESCRIPTION	OVERALL DIMENSIONS (HxWxD)	PRICE
WM-3019-07-02	7RU Swing Out Wall Mount Enclosure, Black	15" x 20.5" x 23.5"	\$428.90
WM-3019-09-02	9RU Swing Out Wall Mount Enclosure, Black	18.5" x 20.5" x 23.5"	460.50
WM-3019-11-02	11RU Swing Out Wall Mount Enclosure, Black	22" x 20.5" x 23.5"	492.15
WM-3019-14-02	14RU Swing Out Wall Mount Enclosure, Black	27" x 20.5" x 23.5"	544.75
WM-3019-16-02	16RU Swing Out Wall Mount Enclosure, Black	30.5" x 20.5" x 23.5"	583.35



F1FR45RU2PTAP

WW3019-07-02

Custom Interconnect Solutions

FIS' extensive resources facilitate a fast concept-to-product development cycle. FIS will design, manufacture and customize products to meet the needs of your large or special projects.

Any enclosure, either stock or custom built, can be loaded with fiber, connectors, and cable management solutions. CWDM modules, high count fiber couplers, and MTP assemblies are all configurable and can easily be pre-installed within the enclosure.

Feature your unique brand on FIS enclosures by taking advantage of customized silk screened logos, vivid laser etched designs, and a variety of powder coat colors.



CONTACT
YOUR FIS SALES
REPRESENTATIVE
FOR CUSTOM
ORDERS

Individual Logos
Laser Etching, Silk Screening,
High Tack Stickers

Unique Colors
Electrostatic Powder Coating
Available in Any Color

Construction Materials
Aluminum or Steel

Pre-Loaded Ports
LGX Adapter Panels, Pigtails,
Snap Packs, Cassettes



SUPPORT SHELF FOR FIBER RACK MOUNT EQUIPMENT

Economical support cantilever shelf designed for 19" two post free standing racks can reduce fatigue on mounting brackets when heavy, active equipment can only be fastened flush to the front of the rack. This support shelf has a fixed 2" (50mm) support cross bar at 18.5" to 21" and an additional adjustable support cross bar at 12"-17" for heavier shorter equipment. Shelf mounts to rear of rack rails and straddles opening width so enclosures and equipment can be mounted below active gear to maximize rack space. Made of strong, lightweight aluminum, powder coated color black, recommended to support equipment up to 40lbs.

PART #	DESCRIPTION	PRICE
F1RMSSXB	Support Shelf for Rack Mount Equipment/Enclosure, (19" free standing rack)	\$75.00



F1-RMSSXB

COOL AIRFLOW PASSIVE ENCLOSURE

This 2RU Cool Airflow Enclosure has a Styrofoam pad affixed on top to dissipate the heat from active switches that may be located above enclosure. The 26"-31" telescopic enclosure moves cool air from cold aisle of a data center to opposite side of rack where switches that have air intakes for cooling may unfortunately be opposite the cold aisle. Based on mounting the 30 degree exhaust deflects the cool air above or below the enclosure into the air intake path of the active switches to aid in cooling. Four 3 inch high flow fans push the cold air through the enclosure out the rear exhaust duct to cool switches. AC/DC power supply included.

PART #	DESCRIPTION	PRICE
F143000391NF	Passive Air Flow Duct with High Air Flow (336CFM)	\$350.00



F1-43000391NF

UNIVERSAL VERTICAL CABLE MANAGER

Single sided vertical cable manager provides flexible, effective and safe way to manage various cables.

PART #	DESCRIPTION	PRICE
F1VCM44RU	Vertical Duct managing cables vertically in cabinet or free standing rack, 44RU (3.5"W x 4"D x 77")	\$105.00
F1VCM36RU	Vertical Duct managing cables vertically in cabinet or free standing rack, 36RU (3.5"W x 4"D x 63")	95.00



F1VCM44RU

HORIZONTAL CABLE MANAGEMENT

These Horizontal Duct Cable Managers are designed for use with any standard size open frame racks, wall enclosures and floor enclosures. They have a single-sided finger-duct design with a removable cover lid.

PART #	DESCRIPTION	PRICE
HF19-02-200	Horizontal Single Sided Finger Duct Style Cable Manager, Black, 3.5"H x 19"W x 3.2"D	33.45
HF19-02-200D	Horizontal Dual Sided Finger Duct Style Cable Manager, Black, 3.5"H x 19"W x 6.4"D	50.55

COOPER B LINE CABLE HOOKS AND CABLE TO BEAM FASTENERS

Cable hooks or J-Hooks are an excellent solution for supporting cables of all types. Cable to Beam fasteners rotate 360 degrees to allow cable to run in any direction and they do accept cable ties. The exclusive Qwik-Latch cable retainers provide secure containment of cables.

PART #	DESCRIPTION	PRICE
BCH21	1-5/16" Cable Hook or J-Hook, Box of 50	\$296.00
BCH32-50	2" Cable Hook or J-Hook, Box of 50	575.00
BCH64	4" Cable Hook or J-Hook, Box of 25	325.00
BCH21C2	1 5/16" Cable to Beam Fastener, Box of 50	530.00
BCH32-C2-50	2" Cable to Beam Fastener, Box of 50	575.00



F1-PDR5

F1-PDR3

F1-PDR2

DATA CABLE ACCESSORIES

Utilize plastic distribution rings or "D" rings, to attach to a backboard, ceiling or a wall to support voice and data cables. The plastic rings feature rounded edges that will prevent damage to the wire and cable in addition to allowing for easier "pull." Available in 2", 3" or 5" sizes.

PART #	DESCRIPTION	PRICE
F1-PDR2	Plastic Distribution Ring (2")	\$3.00
F1-PDR3	Plastic Distribution Ring (3")	3.95
F1-PDR5	Plastic Distribution Ring (5")	2.95
VD00034	Vertical D-Ring Cable Manager for open frame racks, Depth 3.25" - 10 per pack	44.45
VD00070	Vertical D-Ring Cable Manager for open frame racks, Depth 5.7" - 10 per pack	50.95



VD00034

VD00070



PASSIVE FIBER OPTIC CABINETS

VERSA-Fiber Distribution Hub & Fiber Management Centers



FIS VERSA Splice Cassette

- Sliding adapter proved better craft accessibility
- Patch 12 SCAPC or 24 LCAPC
- Patch and Splice
- Splitter configurations
- WDM
- Coexistence
- Can be special configured with Colored adapters to provide better circuit identification
- Removable front adapter plate provides better access with slack control spools



- Environmentally sealed front door, Padlock style security latches and wind stop
- Pad Mount Skirt features Front and Rear removable panels
- Four cable entry ports with liquid tight sealing grommets and internal strain relief brackets
- Built-in cable management brackets

34.5"(h) x 25.4"(w) x 19.8"(d)

36"(h) x 27"(w) x 14"(d)

36"(h) x 27"(w) x 30"(d)
(Dual Doors)

24.71"(h) x 27"(w) x 14"(d)

NEW Zeus VERSA-Fiber Distribution Hub

Zeus Fiber Management Centers

MOUNT TYPE	FIBER (INPUT)	STYLE	CONNECTOR	FEEDER LENGTH (ft)	FEEDER CABLE TYPE	NUMBER OF PORTS	DISTRIBUTION CABLE TYPE	DISTRIBUTION CABLE LENGTH	CONNECTOR	NUMBER OF DISTRIBUTION CABLES
Z	A	I	3	100	LTD	144	LTD	100	3	2
A = Pad	XC = Cross Connect	SP = Splice Cassettes	2 = SC UPC	O = No Feeder	R = Ribbon	144	R = Ribbon	O = No Distribution	2 = SC UPC	1
B = Pole	24	I = Connectorized (No Trays)	3 = SC APC	50	LTD = Loose Tube	288	LTD = Loose Tube	50	3 = SC APC	2
C = Wall	48		4 = LC UPC	100	LTA = Loose Tube Armor	432	LTA = Loose Tube Armor	100	4 = LC UPC	3
D = Mini Pole	72		5 = LC APC	150		576		150	5 = LC APC	4
E = Mini Pad	96			200		1,152		200		5
F = Mini Wall										6
G = XL Pad										

Custom Lengths Available

Custom Lengths Available

ZG2-A2-24-I-3-100-LTA-288-LTA-100-3-2

VERS A FIBER DISTRIBUTION HUB 288 PORT, INPUT: (2) SC/APC LOADED CASSETTES, 24F OSP ARMORED 100FT. DISTRIBUTION: (24) SC/APC LOADED CASSETTES, (2) 144 OSP ARMORED 100FT **Price: \$5,895**

Z-A-48-I-5-100-LTA-432-LTA-100-5-3

ZEUS FIBER MANAGEMENT CENTER 432 PORT, 48 FIBER INPUT LC/APC - 100' FEEDER - (3) 144 DISTRIBUTION LC/APC 100' OSP ARMOR L/T CABLE, FULLY LOADED, ACCOMMODATES (24) HD LGX SPLITTER MODULES **Price: \$6,895**

Z-A-24-I-3-100-LTA-288-LTA-100-3-2

ZEUS FIBER MANAGEMENT CENTER 288 PORT, 24 FIBER INPUT SC/APC - 100' FEEDER - (2) 144 DISTRIBUTION SC/APC 100' OSP ARMOR L/T CABLE, FULLY LOADED, ACCOMMODATES (12) LGX SPLITTER MODULES **Price: \$4,995**

FIS VERSA FDH CABINET

PART #	DESCRIPTION	PRICE
ZG2-A2-SP24	FIS VERSA Fiber Distribution Cabinet, Pad Mount, 24 Versa Splice Cassettes (max), 288 SC Ports / 576 LC Ports	\$1,795.00
Z1-VM12SCYA	VERS A Splice Cassette, 12 Port SC/APC loaded w/ Loose Tube Pigtaills, and Sliding Adapters	169.00
Z1-VM12SCYA-R	VERS A Splice Cassette, 12 Port SC/APC loaded w/ Ribbon Pigtaills, and Sliding Adapters	197.00
Z1-VM24SCLA	VERS A Splice Cassette, 24 Port LC/APC loaded w/ Loose Tube pigtaills, and Sliding Adapters	315.00
Z1-VM24SCLA-R	VERS A Splice Cassette, 24 Port LC/APC loaded w/ Ribbon Pigtaills, and Sliding Adapters	360.00

VERS A FDH CABINET - PACKAGED SPLITTER MODULES

PART #	DESCRIPTION	PRICE
Z1PLM116BHRB1.25LA	1X16 VERS A Splitter Mod with 1.6mm Tails - LC/APC	\$328.00
Z1PLM116BHRB1.25SA	1X16 VERS A Splitter Mod with 1.6mm Tails SC/APC	328.00
Z1PLM132BHRB1.25LA	1X32 VERS A Splitter Mod with 1.6mm Tails LC/APC	480.00
Z1PLM132BHRB1.25SA	1X32 VERS A Splitter Mod with 1.6mm Tails SC/APC	480.00
Z1PLM164BHRB1.25LA	1X64 VERS A Splitter Mod with 1.6mm Tails LC/APC	820.00
Z1PLM164BHRB1.25SA	1X64 VERS A Splitter Mod with 1.6mm Tails SC/APC	820.00



Z1PLM132BHRB1.25SA



Z162LGXSCA2

FIBER MANAGEMENT CENTER - PACKAGED LGX SPLITTER MODULES


PART #	DESCRIPTION	PRICE
Z104LGXSCA2-XX	1x4 LGX Module w/ 2 Meter SC/APC leads	\$125.00
Z108LGXSCA2-XX	1x8 LGX Module w/ 2 Meter SC/APC leads	187.50
Z116LGXSCA2-XX	1x16 LGX Module w/ 2 Meter SC/APC leads	250.00
Z132LGXSCA2-XX	1x32 LGX Module w/ 2 Meter SC/APC leads	375.00
Z164LGXSCA2-XX	1x64 LGX Module w/ 2 Meter SC/APC leads	675.00

Pin Distance is 4.65"

Place an "HD" where the "XX" is on the end of the part number to purchase the High Density LGX Splitter Module version for XL Cabinet ONLY



INTRODUCING



EZnap™ & EZfi™ Multi-Service Terminals Drop Cable Assembly Solution



Available with:

1. Pre-Connectorized Tail
2. OptiTap Input with Loaded Splitters
3. MPO Hardended Input Connectors

The Fastest Way To Pass Homes

The EZnap System is a patent pending, no reel, no spool, kink free payoff system that comes packaged with a preconnectorized OmniPOD MST Endosure. This GR771 rated MST incorporates hardened connector technology designed to defend against rugged outside plant environments. The robust and reliable system interface comes pre-loaded in a 2 port, 4 port, 6 port, or 12 port enclosure using FIS' Single Stranded Tube Flat Drop Cable or OSP Dielectric or Armored cable.

Contact your FIS Sales Representative about all of our pre-loaded options which include cable assembly, number of drop ports, and PLC splitters.

PART #	DESCRIPTION	PORT	DIMENSIONS (H x W x D)	PRICE
Z1-EZN-2-6004-CA-X-D-0300-X-0	4 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 300FT	4	7.90"x 4.75" x 3.35"	\$220.00
Z1-EZN-2-6004-CA-X-D-0500-X-0	4 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 500FT	4	7.90"x 4.75" x 3.35"	280.00
Z1-EZN-2-6004-CA-X-D-1000-X-0	4 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 1,000FT	4	7.90"x 4.75" x 3.35"	439.00
Z1-EZN-2-6006-CA-X-D-0300-X-0	6 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 300FT	6	7.90"x 4.75" x 3.35"	237.00
Z1-EZN-2-6006-CA-X-D-0500-X-0	6 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 500FT	6	7.90"x 4.75" x 3.35"	300.00
Z1-EZN-2-6006-CA-X-D-1000-X-0	6 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 1,000FT	6	7.90"x 4.75" x 3.35"	459.00
Z1-EZN-2-1208-CA-X-D-0300-X-0	8 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 300FT	8	11" x 4.75" x 3.35"	299.00
Z1-EZN-2-1208-CA-X-D-0500-X-0	8 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 500FT	8	11" x 4.75" x 3.35"	360.00
Z1-EZN-2-1208-CA-X-D-1000-X-0	8 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 1,000FT	8	11" x 4.75" x 3.35"	520.00
Z1-EZN-2-1212-CA-X-D-0300-X-0	12 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 300FT	12	11" x 4.75" x 3.35"	331.00
Z1-EZN-2-1212-CA-X-D-0500-X-0	12 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 500FT	12	11" x 4.75" x 3.35"	395.00
Z1-EZN-2-1212-CA-X-D-1000-X-0	12 port MST, OptiTap Compatible ports, Single Stranded Tube Flat Drop Pigtail, EZnap Box, 1,000FT	12	11" x 4.75" x 3.35"	553.00

Kink Free Coil Payoff System

Decrease Installation Time by as much as 70% with either EZfi or EZnap



The Fastest Way to Get Homes Connected



The EZfi Solution is a patent-pending, no reel, no spool, kink-free payoff system that comes packaged with a minimum of a NID and drop cable, and options for an I/O cable, wall plate, and fiber patch cable for connector to an indoor ONT. Custom Lengths Available.

PART #	DESCRIPTION	DIMENSIONS OF EZFI BOX (H x W x D)	PRICE
Z1-EZF-1-FT-1-0500-AX-X-X-000-000-X	FIS 1F Flat Drop Cable, Toneable 500FT, OptiTap to Pigtail, EZFi Box	17.5"x17.5"x9.5"	\$157.00
Z1-EZF-2-FT-1-0500-AJ-1-X-000-000-X	FIS 1F Flat Drop Cable, Toneable 500FT, OptiTap to SC/APC to NID, EZFi Box	17.5"x17.5"x9.5"	223.00
Z1-EZF-3-FT-1-0500-AJ-1-2-025-000-X	FIS 1F Flat Drop Cable, Toneable 500FT, OptiTap to SC/APC to NID, I/O Assembly 25FT, EZFi Box	17.5"x17.5"x9.5"	255.00
Z1-EZF-5-FT-1-0500-AJ-1-2-025-003-1	FIS 1F Flat Drop Cable, Toneable 500FT, OptiTap to SC/APC to NID, I/O Assembly 25FT, Wall Plate, 3FT Patchcord, EZFi Box	17.5"x17.5"x9.5"	305.00

CLOSURES

CLOSURES | OUTDOOR DROP CABLE CLOSURES



FIS NETWORK INTERFACE DEVICES (NID)

FIS NID Box, US Made in Oriskany, NY was designed to provide protection for your fiber optic connectors and fusion splices in both indoor and outdoor environments. This enclosure allows you to choose which entry type grommet best fits your application and provides a unique cable management system for all types of FTTX cable such as Flat & Round Drop Cable.



Z1ND-XY



Z1NDYACR-XY



Z1ND-XY



Z1NID-MDULYAYA50



Z1NDLGX-XY



Z1NDYA1-XY



Available Grommets

Replace X (left Side) Y (Right side) entry ports with your desired grommets.



Z1NID-MB01/ Z1NID-MB03



F1-LC24DBKAPCSUL



U-Shape (U)



Round Flat (R)



3/4" Conduit (P)



1/2" Conduit (K)



Coupler (C)

Inquire with Sales about pre loaded enclosures for quicker installation.

Call for Quantity Pricing

FIS FTTX FIBER OPTIC INTERCONNECT ENCLOSURES

PART #	DESCRIPTION	(HxWxD)	PRICE
Z1NDYA1-XY	FIS NID Box, 1 SC/APC Adapter, Round Cable Management, Ground Screw.	8" x 8" x 3"	\$39.95
Z1NDLGX-XY	FIS NID Box, LGX Compatible (sold separately (see page 70) (6) Splices and Cable Management	8" x 8" x 3"	56.95
Z1NDYACR-XY	FIS NID Box, 1 SC/APC Adapter, Cable Retention and Management Plate, 12 splices, 12 Port Adapter Plate Compatible (sold separately)	8" x 8" x 3"	35.95
Z1NID-MB01	12 SC/APC Sliding Pack Adapter Plate, for Z1NDYACR only	8" x 8" x 3"	30.00
Z1NID-MB03	12 Duplex LC/APC Sliding Pack Adapter Plate, for Z1NDYACR only	8" x 8" x 3"	44.95

FIS NID BOX WITH SLACK SPOOL WITH CABLE MANAGEMENT AND SPLICE CHIP

PART #	DESCRIPTION	(HxWxD)	PRICE
Z1ND-XY	FIS NID Box, empty	8" x 8" x 3"	\$24.95
Z1NID-MDULYAYA50	FIS NID Spool, 3.0mm Indoor/Outdoor LBL Cable, SC/APC - SC/APC, 50FT	8" x 8" x 3"	39.95
Z1NID-MDUZYAYA50	FIS NID Spool, 4.8mm Indoor/Outdoor ZBL Cable, SC/APC - SC/APC, 50FT	8" x 8" x 3"	44.95
Z1NID-MDUAYAYA50	FIS NID Spool, 3.0mm Armored Indoor/Outdoor, SC/APC - SC/APC, 50FT	8" x 8" x 3"	45.95
Z1NID-MDUAPYAYA50	FIS NID Spool, 3.0mm Armored Indoor/Outdoor, Pushable SC/APC - SC/APC, 50FT	8" x 8" x 3"	46.95

Other Cable Styles, Colors and Lengths Available

CORNING



Z1602FTTX

Z176SFTTX

Z1NG10FTTX

CORNING FTTX FIBER OPTIC INTERCONNECT ENCLOSURES

PART #	DESCRIPTION	(HxWxD)	PRICE
Z1602FTTX	Fiber Enclosure for FTTx, no adapters installed, accommodates (6) SC simplex or (6) duplex LC adapters with included bracket, and 12 fusion splice sleeves. Features ground post, hex security screw and allows for 3 meters of cable slack. Rubber grommet cable entrances on bottom.	8.42" x 7.92" x 2.5"	\$39.95
Z176SFTTX	Fiber Enclosure for FTTx, no adapters installed, accommodates up to (2) SC simplex or (2) duplex LC adapters, and/or (1) "H" connector receptacle such as OptiTap/OptiTip. Features (1) splice chip for up to 12 fusion splice sleeves, ground post, hex security screw and slack routing spool for storage. Rubber grommet entrances on bottom of enclosure.	10" x 8.42" x 2.96"	48.95
Z1NG10FTTX	Fiber Enclosure for FTTx, no adapters installed, accommodates (12) SC simplex or (12) duplex LC adapters, features ground post, hex security screw and inside tabs for slack storage. Rubber grommets for cable entrances on bottom.	11.91" x 8.31" x 3.35"	55.95

See SC and LC adapters for enclosures located on pages 146 and 147

CUSTOM DROP & PREMISE CABLE ASSEMBLIES

CABLE TYPE	FIBER COUNT	CONNECTOR A	CONNECTOR B	LENGTH (FT)	BREAKOUT LENGTH	BREAKOUT BUILD UP	PULLING EYE INSTALLED	SPOOL
ZDCT	1	HIP	YA	150	B10	Z4	-	-
ZDCT = Drop Cable Toneable	1	HIP = FIS ZTAP Connector	P = Pigtail	25	B06 = 6 in	Z9 = 900µm	PE = Outside End Only	SP = Spool
ZDCN = Drop Cable Non-Toneable	2	OPT = Corning OptiTap Connector	HIP = FIS ZTAP Connector	50	B10 = 10 in	Z1 = 1.6mm	PBE = Both Ends	HS = Hand Spool
ZDCT9 = 900µm Univ. Flat Drop Toneable	4	YA = SC/APC	OPT = Corning OptiTap Connector	100	B12 = 12 in	Z2 = 2mm	MPE = Mini Pulling Eye (Pathfinder)	
ZDCN9 = 900µm Univ. Flat Drop Non-Toneable	6	YU = SC/UPC	YA = SC/APC	150	B24 = 24 in	Z3 = 3mm		
ZMDUL = Indoor/Outdoor 3mm LBL®	12	LA = LC/APC	YU = SC/UPC	200		Z4 = 4.8mm		
ZMDU48 = Indoor/Outdoor 4.8mm ZBL®		LU = LC/UPC	LA = LC/APC	250				
ZMDUA = Armored Indoor/Outdoor 3mm		YAS = SC/APC Shuttered Connector	LU = LC/UPC	300				
ZMDULP = Indoor/Outdoor 3mm Push Fiber (YAP Connectors Only)*		YAP = SC/APC Push Connector*	LU = LC/UPC	400				
ZMDN = 1 Fiber 900µm Flat Micro-Drop Non-Toneable			YAS = SC/APC Shuttered Connector	500				
ZMDT = 1 Fiber 900µm Flat Micro-Drop Toneable			YAP = SC/APC Push Connector*	600				
ZDCNLS = 1 Fiber 900µm Long Span Flat Drop Non-Toneable				700				
				750				
				1,000				

Part # Example:

ZDCT-1-HIP-YA-150-B10-Z4

Translates to: Zeus Toneable Flat Drop Cable - (1) ZTAP Connector - SC/APC10" Breakout Length on 4.8mm Tubing - 150ft

FIS FLAT DROP CABLE ASSEMBLIES

PART #	DESCRIPTION	PRICE
ZDCT-1-HIP-P-100	1 Fiber Toneable Flat Drop Cable - (1) ZTAP Connector - Pigtail - 100 ft	\$44.98
ZDCT-1-HIP-P-200	1 Fiber Toneable Flat Drop Cable - (1) ZTAP Connector - Pigtail - 200 ft	59.98
ZDCT-1-HIP-P-250	1 Fiber Toneable Flat Drop Cable - (1) ZTAP Connector - Pigtail - 250 ft	68.98
ZDCT-1-HIP-P-500	1 Fiber Toneable Flat Drop Cable - (1) ZTAP Connector - Pigtail - 500 ft	112.98
ZDCT-1-HIP-P-1000-SP	1 Fiber Toneable Flat Drop Cable - (1) ZTAP Connector - Pigtail - 1,000ft, 18" Plastic Spool	184.95
ZDCN-1-HIP-P-100	1 Fiber Non Toneable Flat Drop Cable - (1) ZTAP Connector - Pigtail - 100 ft	41.98
ZDCN-1-HIP-P-200	1 Fiber Non Toneable Flat Drop Cable - (1) ZTAP Connector - Pigtail - 200 ft	57.98
ZDCN-1-HIP-P-250	1 Fiber Non Toneable Flat Drop Cable - (1) ZTAP Connector - Pigtail - 250 ft	66.98
ZDCN-1-HIP-P-500	1 Fiber Non Toneable Flat Drop Cable - (1) ZTAP Connector - Pigtail - 500 ft	110.98
ZDCN-1-HIP-P-1000-SP	1 Fiber Non Toneable Flat Drop Cable - (1) ZTAP Connector - Pigtail - 1,000ft, 18" Plastic Spool	180.98

FIS FIBER DROP CABLE ENCLOSURE

Today's subscribers are more sensitive to service outages than ever before. Service Providers strive to locate and resolve service outages quickly and cost effectively. The FIS fiber repair enclosure offers an economical alternative to replacing a subscriber's severed fiber drop cable. The FIS fiber repair enclosure is a robust, permanent repair solution used in aerial or buried deployments. The FIS fiber Fast Repair kit provides a complete assembly of two housings interconnected with SC/APC terminated fiber cable for quicker restoration times.


- Robust, weatherproof thermoplastic housing
- Housing supports fusion splicing (2) and connector bulkhead
- Fast repair kit for where fiber slack is not available
 - identifiable with programed OTDR
- Direct bury, strand, wall or pole mounting
- Tone wire connection point for underground locating
- Designed For Drop Cable Applications

PART #	DESCRIPTION	PRICE
Z1-LOCDROP-EN	Fiber Drop Cable Enclosure, Includes two large hole entry port nuts and two oval hole grommets for flat drop cables, two small hole entry port nuts and two round hole grommets for Fast Access type drop cables, one SCAPC bulkhead adapter	59.85
Z1-LOCDROP-2SCAPC	LOC-DROP Fiber Repair Kit, Duplex with installed SC/APC-SC/APC interconnect cable, each housing, including 1 Set of Flat Drop Grommets/Nuts, 1 Set Fast Access Drop Grommets/Nuts, SC (Green) Adapter	163.85
Z1-LOCDROP-SM	Strand Mount Brackets for Fiber Drop Repair Enclosure (sold in pairs)	21.85

FIS FLAT DROP CABLE SPOOL BULK PRICING

FIS offers the flat Stranded Single Tube drop cable for Fiber To The Home applications. This durable design incorporates two dielectric rigid rods for optimal tensile strength and crush protection.

PART #	SPOOL LENGTH / SIZE	FIBER COUNT	DESCRIPTION	PRICE
Z1-25001T18	2,500FT / 18 in	1	1 Fiber SM Corning® SMF-28® Ultra fiber Flat Drop Toneable PE Black 18" (763 meters)	\$486.25 ea
Z1-25002D18	2,500 ft / 18 in	2	SM Corning® SMF-28® Ultra fiber Dry Flat Drop Cable PE Black (763 meters)	482.25 ea
Z1-25002T18	2,500 ft / 18 in	2	SM Corning® SMF-28® Ultra fiber Gel Flat Drop Toneable (24 AWG) Cable (763 meters)	523.25 ea
Z1-25002900D18	2,500 ft / 18 in	2	900um Buffer SM Corning® SMF-28® Ultra fiber Dry Flat Drop PE Black (763 meters)	531.25 ea
Z1-25002900T18	2,500 ft / 18 in	2	900um SM Corning® SMF-28® Ultra fiber Dry Flat Drop Toneable 24 AWG (763 meters)	642.25 ea
Z1-25006D18	2,500 ft / 18 in	6	SM Corning® SMF-28® Ultra fiber Dry Flat Drop Cable PE Black (763 meters)	550.25 ea
Z1-250012D18	2,500 ft / 18 in	12	SM Corning® SMF-28® Ultra fiber Dry Flat Drop Cable PE Black (763 meters)	717.25 ea
Z1-250012T18	2,500 ft / 18 in	12	SM Drop Cable Dry Toneable (24 AWG) PE Black (763 meters)	663.25 ea

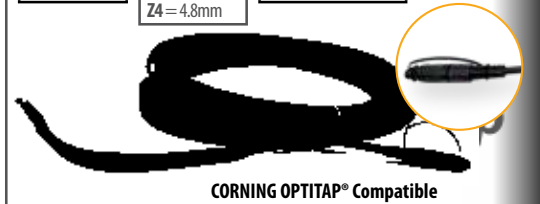

CORNING OPTITAP® Compatible



SENKO SC/APC SHUTTERED CONNECTOR

SENKO IP-16 LC SAFE LOCK CONNECTOR



CORNING OPTITAP® ZDCT-1-OPT-P-100


OPTITAP® Connector to Pigtail, 100ft Toneable



BEND-INSENSITIVE HOUSE CABLE ZMDUL-1-YA-P-100-HS SC/APC Connector to Pigtail, 100ft Hand Spool



PUSH FIBER ASSEMBLIES ZMDULP-1-PYA-YA-25 SC/APC Push Connector to SC/APC, 25ft

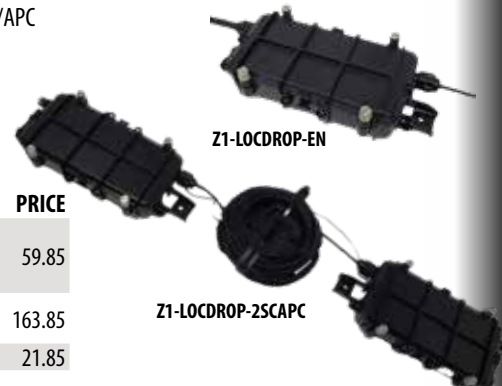

Z1-LOCDROP-EN

Z1-LOCDROP-2SCAPC



Z125002D18



Z1-ORI16PT



Z1-ORI16WM

*Adapters Sold Separately
*All splice trays included in each enclosure

FIS ORION SERIES 16 PORT ENCLOSURE

The Orion Series 16 Port Enclosure is an outdoor enclosure designed for harsh environments in FTx applications. Fiber splicing, splitting, and drop distribution can be completed inside this box offering solid protection and management for your network building.

Ask your FIS Sales Representative about pre-loading the enclosures with pigtails, adapters, and PLC Splitters.

PART #	DESCRIPTION	(HxWxD)	MOUNTING OPTIONS	PRICE
Z1-ORI16PT	Orion Series Enclosure. 16 SC Ports/32 LC Ports. 1 Splice Tray Included, No Adapters or Pigtails	11.5" x 8.5" x 3.25"	Pole/Wall	\$99.95
Z1-ORI16T	Orion Series Splice Enclosure. Splice Trays Included. Pole or Wall Mount.	11.5" x 8.5" x 3.25"	Pole/Wall	89.95
Z1-ORI16WM	Orion Series Enclosure 16 SC Ports/32 LC Ports Wall Mount Only Splice Tray Included No Adapters or Pigtails	11.5" x 8.5" x 3.25"	Wall	99.95



Z1-ORI24WM

Z1-ORI24P

FIS ORION SERIES 24 PORT ENCLOSURE

The Orion Series 24 Port Enclosure is an outdoor enclosure made of a UV Resistant, anti-aging polycarbonate and designed for outdoor use. Fiber splicing, splitting, and drop distribution can be completed inside of this box offering solid protection and management for your FTx Network.

Ask your Sales Representative about pre-loading enclosures with adapters, splitter packages, and various cable assemblies.

PART #	DESCRIPTION	(HxWxD)	MOUNTING OPTIONS	PRICE
Z1-ORI24P	Orion Series Enclosure 24 SC Ports/48 LC Ports, Splice Tray Included, No Adapters or Pigtails	13.5" x 8.75" x 3.75"	Pole	\$145.95
Z1-ORI24WM	Orion Series Enclosure 24 SC Ports/48 LC Ports, Splice Tray Included, No Adapters or Pigtails	12.5" x 9.5" x 3.95"	Pole/Wall	105.95



Z1-ORI48

*Adapters Sold Separately
*All splice trays included in each enclosure

FIS ORION SERIES 32 PORT ENCLOSURE

The Orion Series 32 Port Enclosure is an IP65 Rated cabinet made with UV-resistant polycarbonate. Splice trays are included and mounted on the back wall behind the hinged adapter panels. All cable management accessories are included as well as grounding screw.

Contact your FIS Sales Representative about pre-loading the enclosures with pigtails, adapters, and PLC splitters.

PART #	DESCRIPTION	(HxWxD)	MOUNTING OPTIONS	PRICE
Z1-ORI48	Orion Series Enclosure 48 SC Ports/96 LC Ports with Splicing and Cable Management, No Adapters or Pigtails	16.5" x 13.4" x 5.1"	Wall	\$195.00

FIS FIBER OPTIC NID TERMINATION BOX

FIS Wall Mount Fiber Optic NID Terminal Box is designed to provide protection for fiber optic connectors and splices in indoor or outdoor environments (IP65 Rated). The enclosure has a built in, swing-out mini splice tray plus a bulkhead panel with SC cutout ports. 2 or 3 Cable access ports with built in weather-tight grommets allow for easy cable installation. Adapters not included.

PART #	DESCRIPTION	(HxWxD)	PRICE
F1-62DW-2	FIS NID Termination Box (For 2 Simplex SC or 2 Duplex LC Connections) 2 Entry Ports	8.2" x 6" x 2"	\$39.95
F1-62DW-3	FIS NID Termination Box (For 6 Duplex SC or 6 LC Quad Connections) 3 Entry Ports	10.2" x 7" x 2"	49.95

See SC and LC adapters for enclosures located on pages 146 and 147



F1-62DW-2



F1-62DW-3



OAA1X4XPXXU

AFL OptiNID® DUO OPTICAL NID


Holds up to 4 SC simplex or LC duplex adapters and has built in splice sleeve holders for 18 single fiber or 6 ribbon fiber splices. Can install both quick termination and splice on connectors. The OPN Duo is available with two different base cable entry options, either a pair of U-shaped "drop-in" style grommets, or two half-inch ports allowing for a variety of different entry accessories. Dimensions: 9.6"H x 7"W x 2.7"D

PART #	DESCRIPTION	PRICE
OAA1X4XPXXU	Duo Optical NID (2) "U" cable drop in grommets, holds up to 4 SC/duplex LC adapters, no adapters included, with grounding and splice holder	\$39.95
OAA1X4XPXG	Duo Optical NID (2) round 1/2" rubber grommet holes, holds up to 4 SC/duplex LC adapters, no adapters included, with grounding and splice holder	39.95
AXTRAYMOD20	OptiNID Duo Splice Module, pack of 20	39.95

See SC and LC adapters for enclosures located on pages 146 and 147

FIS: Manufacturer of Fiber Management Centers

FIS Fiber Management Centers (FMC) are Made in the USA, NEMA Rated and can be loaded with custom cable assemblies and/or splitters at the factory.

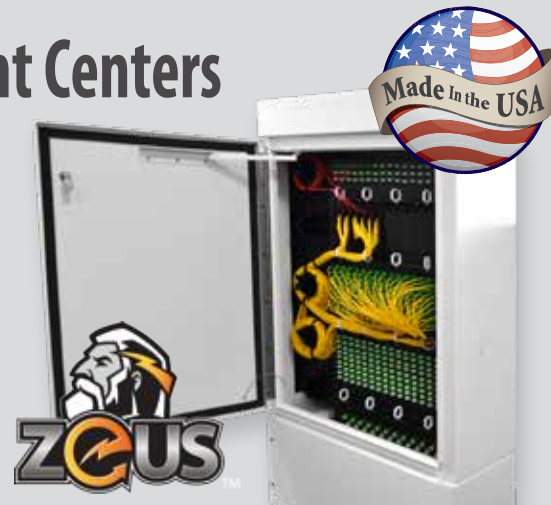

FIS IN-HOME FIBER WALL PLATE

- Adjustable SC/APC Adapter port for easy inspection and cleaning
- Snap on cover with security screw
- Built in shutter port for protection

PART #	DESCRIPTION	PRICE
Z1-WPYAS	FIS Wall Plate with cover, Shutter input port included, SC/APC adjustable adapter, splice holder, internal storage.	\$11.95



Z1-WPYAS

FIS FIBER OPTIC SPLICE CLOSURE

This FIS Outside Plant Direct Burial Closure offers the perfect choice for low fiber count distribution applications involving butt and inline installations. The compact size and rugged design allow the closure to be deployed in below grade, aerial and buried installations. Dimensions: 21" L x 8" W x 4" H Weight: 9lbs.

- 4 Entry Ports
- Accepts cables from 10mm - 22mm diameter
- Can be configured for butt or in-line applications
- Integrated splice trays included
- Permanent waterproof sealing requires no re-entry kit
- IP rating: 66 (Equal to NEMA 4 and 4X)
- Direct Burial or Aerial applications

PART #	DESCRIPTION	PRICE
F1-OSPDBC24	FIS Fiber Optic Splice Closure - 24 Fiber	\$135.00
F1-OSPDBC48	FIS Fiber Optic Splice Closure - 48 Fiber	140.00
F1-OSPTRAY	Splice Tray 12 but expandable to 24 Fiber For F1-OSPDBC-XX Closures	12.95



F1-OSPDBC48



F1-OSPDBC24

FIS FIBER DROP TERMINATION ENCLOSURE (Strand Mount Only)

FIS Drop Termination Enclosure provides maximum protection at the fiber splice point and distribution of drop fibers. This "plug-n-play" style enclosure is specially designed to accommodate 16 pre-terminated fiber drop cables. The outer case is constructed of chemical resistant, anti aging material. Splice trays are able to accommodate PLC Splitters, and/or up to 24 individual splices. Maximum of (6) 24ct splice trays per enclosure. Dimensions 13.5"(h) x 8.75"(w) x 5.0"(d).

PART #	DESCRIPTION	PRICE
Z1-DTE16SCA	FIS DTE Aerial Strand Mount Only - 16 SC/APC Adapters. Includes (1) 24ct Splice tray	\$350.00
Z1-DTETR24	24ct Splice Tray for Drop Termination Enclosure	15.75

* LC/APC's Available



Z1-DTE16SCA

FIS OSP DISTRIBUTION ENCLOSURE - 8 Port (Pole, Ped, Strand, Wall Mount)

The OSP Distribution 8 Port Enclosure is uniquely designed to accept a wide range of distribution and drop cables to accommodate any FTTx application. This "plug-n-play" style enclosure is specifically designed to accept 8 pre-terminated drop cables and up to 60 core splices. The Enclosure includes (5) 12ct Splice Trays, 8 Drop Cable ports, 4 Feeder Ports (5mm-10mm) and all mounting hardware. Dimensions 13.5"(h) x 7.75"(w) x 5.0"(d).

Contact your FIS Sales Representative to fill the enclosure with PLC Splitters and pigtails.

PART #	DESCRIPTION	PRICE
Z1-ODE08SCA	FIS OSP Distribution Enclosure - 8 Port, Includes 8 SC/APC adapters and 5 12ct splice trays.	\$197.00
Z1-DLODE08SCA-0595	FIS DaisyLink Systems ODE 8 Port, SC/APC Ports, 1x8 5/95	315.85
Z1-DLODE08SCA-1090	FIS DaisyLink Systems ODE 8 Port, SC/APC Ports, 1x8 10/90	315.85
Z1-DLODE08SCA-1585	FIS DaisyLink Systems ODE 8 Port, SC/APC Ports, 1x8 15/85	315.85
Z1-DLODE08SCA-2080	FIS DaisyLink Systems ODE 8 Port, SC/APC Ports, 1x8 20/80	315.85
Z1-DLODE08SCA-2575	FIS DaisyLink Systems ODE 8 Port, SC/APC Ports, 1x8 25/75	315.85



Z1-ODE08SCA



Z1PLM1162SLSA

Z1PLM1161SLLA



Z1PLM1321RLA



Z1PLM1321RSA



F1-PLC-08-SCU



Z1PLCM1160SP20A2LA1.5

All configurations have the following specifications:

- OSP cassette size (100mm x 80mm x 10mm)
- 2.0mm jacket
- 1.5m leads
- Common-Red jacket

Other Connectors Available!



Z1PLM1321L162SACA

All configurations have the following specifications:

- 1.6mm jacket
- 2m leads
- Common SC/APC Adapter

Other Connectors Available!

OPTICAL SPLITTER LGX PACKAGE WITH CONNECTOR ADAPTERS

The FIS Optical Splitter in a LGX Package allows users to install in any LGX style Rack or Wall Mount Enclosure (see page 64). Each module can be packaged with any connector style adapter utilizing Single-Wide and Double-Wide dimensions.

PART #	DESCRIPTION	PRICE
Z1PLM141SLSA	1x4 LGX Optical Splitter, Single Wide, SC/APC Adapters	\$95.85
Z1PLM141SLLA	1x4 OSP Optical Splitter, Single Wide, LC/APC Adapters	95.85
Z1PLM181SLSA	1x8 OSP Optical Splitter, Single Wide, SC/APC Adapters	140.85
Z1PLM181SLLA	1x8 OSP Optical Splitter, Single Wide, LC/APC Adapters	140.85
Z1PLM1162SLSA	1x16 OSP Optical Splitter, Double Wide, SC/APC Adapters	162.85
Z1PLM1161SLLA	1x16 OSP Optical Splitter, Single Wide, LC/APC Adapters	162.85

Other Connectors Available!

OPTICAL SPLITTER RACK MOUNT CONNECTOR ADAPTERS

PART #	DESCRIPTION	PRICE
Z1PLM1161RSA	1x16 PLC Optical Splitter, 19" 1RU Rackmount Package with SC/APC Connectors	\$368.89
Z1PLM1161RLA	1x16 PLC Optical Splitter, 19" 1RU Rackmount Package with LC/APC Connectors	368.89
Z1PLM1321RSA	1x32 PLC Optical Splitter, 19" 1RU Rackmount Package with SC/APC Connectors	440.85
Z1PLM1321RLA	1x32 PLC Optical Splitter, 19" 1RU Rackmount Package with LC/APC Connectors	440.85
Z1PLM1641RSA	1x64 PLC Optical Splitter, 19" 1RU Rackmount Package with SC/APC Connectors	685.00
Z1PLM1641RLA	1x64 PLC Optical Splitter, 19" 1RU Rackmount Package with LC/APC Connectors	685.00

PLANAR LIGHTWAVE CIRCUIT SPLITTERS

Today's high-port-count applications for broadband system applications demand the best performance and the highest reliability under the most adverse of environments. Planar Lightwave Circuit Splitters deliver on all these requirements. FIS provides a variety of PLC's pre-terminated with SC/UPC, SC/APC or the connector of choice.

PART #	DESCRIPTION	PRICE
F1PLC04	1x4 PLC Unconnectorized	\$35.00
F1PLC08	1x8 PLC Unconnectorized	45.00
F1PLC16	1x16 PLC Unconnectorized	65.00
F1PLC32	1x32 PLC Unconnectorized	100.00
F1-PLC-04-SCA	1x4 PLC with Fan Out and SC/APC Connectors	48.00
F1-PLC-08-SCA	1x8 PLC with Fan Out and SC/APC Connectors	65.00
F1-PLC-16-SCA	1x16 PLC with Fan Out and SC/APC Connectors	90.00
F1-PLC-32-SCA	1x32 PLC with Fan Out and SC/APC Connectors	140.00

OPTICAL SPLITTER OSP PACKAGE

The FIS Optical Splitter packaged in an OSP Cassette addresses environmental challenges with improved fiber protection which allows for quick installation in hardened environments and maximizes space in cabinets and enclosures.

PART #	DESCRIPTION	DIMENSIONS (LxWxH)	PRICE
Z1PLCM140SP20A2SA1.5	1x4 OSP Optical Splitter, SC/APC Connectors	3.94" x 3.15" x 0.4"	\$78.00
Z1PLCM140SP20A2LA1.5	1x4 OSP Optical Splitter, LC/APC Connectors	3.94" x 3.15" x 0.4"	78.00
Z1PLCM180SP20A2SA1.5	1x8 OSP Optical Splitter, SC/APC Connectors	3.94" x 3.15" x 0.4"	116.00
Z1PLCM180SP20A2LA1.5	1x8 OSP Optical Splitter, LC/APC Connectors	3.94" x 3.15" x 0.4"	116.00
Z1PLCM1160SP20A2SA1.5	1x16 OSP Optical Splitter, SC/APC Connectors	3.94" x 3.15" x 0.4"	138.00
Z1PLCM1160SP20A2LA1.5	1x16 OSP Optical Splitter, LC/APC Connectors	3.94" x 3.15" x 0.4"	138.00
Z1PLCM1320SP20A2SA1.5	1x32 OSP Optical Splitter, SC/APC Connectors	3.94" x 3.15" x 0.4"	150.00
Z1PLCM1320SP20A2LA1.5	1x32 OSP Optical Splitter, LC/APC Connectors	3.94" x 3.15" x 0.4"	150.00
Z1PLCM2160SP20A2SA1.5	2x16 OSP Optical Splitter, SC/APC Connectors	3.94" x 3.15" x 0.4"	190.00
Z1PLCM2160SP20A2LA1.5	2x16 OSP Optical Splitter, LC/APC Connectors	3.94" x 3.15" x 0.4"	190.00
Z1PLCM2320SP20A2SA1.5	2x32 OSP Optical Splitter, SC/APC Connectors	3.94" x 3.15" x 0.4"	256.00
Z1PLCM2320SP20A2LA1.5	2x32 OSP Optical Splitter, LC/APC Connectors	3.94" x 3.15" x 0.4"	256.00

OPTICAL SPLITTER LGX PACKAGE

The FIS Optical Splitter in a LGX Package allows users to install in any LGX style Rack or Wall Mount Enclosure (see page 8). Each module is packaged with 2M long legs providing the user with a single-wide only module.

PART #	DESCRIPTION	DIMENSIONS (LxWxH)	PRICE
Z1PLM12HL162SACA	1x2 LGX Optical Splitter, SC/APC Connectors	6.14" x 3.98" x 1.14"	\$ 72.00
Z1PLM141L162LACA	1x2 LGX Optical Splitter, LC/APC Connectors	6.14" x 3.98" x 1.14"	72.00
Z1PLM141L162SACA	1x4 LGX Optical Splitter, SC/APC Connectors	6.14" x 3.98" x 1.14"	86.00
Z1PLM141L162LACA	1x4 LGX Optical Splitter, LC/APC Connectors	6.14" x 3.98" x 1.14"	86.00
Z1PLM181L162SACA	1x8 LGX Optical Splitter, SC/APC Connectors	6.14" x 3.98" x 1.14"	126.00
Z1PLM181L162LACA	1x8 LGX Optical Splitter, LC/APC Connectors	6.14" x 3.98" x 1.14"	126.00
Z1PLM1161L162SACA	1x16 LGX Optical Splitter, SC/APC Connectors	6.14" x 3.98" x 1.14"	146.00
Z1PLM1161L162LACA	1x16 LGX Optical Splitter, LC/APC Connectors	6.14" x 3.98" x 1.14"	146.00
Z1PLM1321L162SACA	1x32 LGX Optical Splitter, SC/APC Connectors	6.14" x 3.98" x 1.14"	172.00
Z1PLM1321L162LACA	1x32 LGX Optical Splitter, LC/APC Connectors	6.14" x 3.98" x 1.14"	172.00
Z1PLM1161L162SACAD	Dual 1x16 LGX Optical Splitter, SC/APC Connectors	6.14" x 3.98" x 1.14"	316.00
Z1PLM1161L162SLACAD	Dual 1x16 LGX Optical Splitter, LC/APC Connectors	6.14" x 3.98" x 1.14"	316.00
Z1PLM1321L162SACAD	Dual 1x32 LGX Optical Splitter, SC/APC Connectors	6.14" x 3.98" x 1.14"	372.00
Z1PLM1321L162SLACAD	Dual 1x32 LGX Optical Splitter, LC/APC Connectors	6.14" x 3.98" x 1.14"	372.00

CWDM OSP PASSIVE MODULES

Coarse Wavelength Division Multiplexing (CWDM) Passive Outside Plant (OSP) Modules are available in 2, 4, 8 and 16 channels. These passive modules utilize 20nm channel spacing from 1271 – 1611nm. The CWDM modules are sold unconnectorized with 1 meter 900um tight buffered fiber leads but FIS can install any connector that you choose. The OSP rating makes them rugged enough to work in the harshest of environments (-40~+85) in your NEMA rated enclosures. When ordering please note the starting wavelength (ex. 27 = 1271, 29 = 1291, 31 = 1311 etc.) as the two XX variables at the end of your part number. Applications include FTTH (Fiber to the Home), R&D test labs and anywhere the separation of fiber signals is required.

PART #	DESCRIPTION	PRICE
Z1CWM2XX91NC	2 channel CWDM, OSP cassette, 900um, 1m leads, No connectors. Start channel 1XX1	\$146.00
Z1CWM4XX91NC	4 channel CWDM, OSP cassette, 900um, 1m leads, No connectors. Start channel 1XX1	290.00
Z1CWM8XX91NC	8 channel CWDM, OSP cassette, 900um, 1m leads, No connectors. Start channel 1XX1	580.00
Z1CWM16XX91NC	16 channel CWDM, OSP cassette, 900um, 1m leads, No connectors. Start channel 1XX1	1,160.00

CWDM Channels (nm): 1271, 1291, 1311, 1331, 1351, 1371, 1431, 1451, 1471, 1491, 1511, 1531, 1551, 1571, 1591, 1611

Note: "XX= 27" for starting channel 1271nm

CWDM LGX PASSIVE MODULES

Coarse Wavelength Division Multiplexing (CWDM) LGX (Light Guide Cross-connect) Modules are available in 2, 4, 8 and 16 channels. These passive modules utilize 20nm channel spacing from 1271 – 1611nm. The CWDM LGX modules are sold with LC/APC connectors (w/ adapters) and packaged inside of a cassette. The cassette is plug and play making installation quick and efficient. The LGX standard or foot print is widely used with rack and wall enclosure face plates. These modules are 1 RU (Rack Unit – 1.75 inches) and fit into a standard 19 inch enclosure. When ordering please note the starting wavelength (ex. 27 = 1271, 29 = 1291, 31 = 1311 etc.) as two XX variables at the end of your part number

PART #	DESCRIPTION	PRICE
Z1CWM2XX1LLA	2 channel CWDM, LGX, LC/APC connectors. Start channel 1XX1	\$160.00
Z1CWM4XX1LLA	4 channel CWDM, LGX, LC/APC connectors. Start channel 1XX1	300.00
Z1CWM8XX1LLA	8 channel CWDM, LGX, LC/APC connectors. Start channel 1XX1	600.00
Z1CWM16XX1LLA	16 channel CWDM, LGX, LC/APC connectors. Start channel 1XX1	1,220.00

CWDM Channels (nm): 1271, 1291, 1311, 1331, 1351, 1371, 1431, 1451, 1471, 1491, 1511, 1531, 1551, 1571, 1591, 1611

Note: "XX= 27" for starting channel 1271nm

DWDM OSP PASSIVE MODULES

Dense Wavelength Division Multiplexing (DWDM) Passive Outside Plant (OSP) Modules are available in 2, 4, 8, 16, 20 and 40 channels. These passive modules utilize 100GHz or 200GHz channel spacing; this is represented in the part number by the variable Y (1=100GHz and 2=200GHz). These modules are available with ITU channels 20 – 60. The DWDM modules are sold unconnectorized with 1 meter 900um tight buffered leads but FIS can install any connector that you choose. The OSP rating makes them rugged enough to work in the harshest of environments (-40~+85) in your NEMA rated enclosures. When ordering please note the starting channel (ex. Channel 20 = 20, Channel 40 = 40 etc.) as the two XX variables at the end of your part number. Applications include FTTH (Fiber to the Home), R&D test labs and anywhere the separation of fiber signals is required.

PART #	DESCRIPTION	PRICE
Z1DWMY2CXX91NC	2 channel DWDM, OSP cassette, 900um, 1m leads, No connectors. 100G, Start channel CHXX	\$160.00
Z1DWMY4CXX91NC	4 channel DWDM, OSP cassette, 900um, 1m leads, No connectors. 100G, Start channel CHXX	316.00
Z1DWMY8CXX91NC	8 channel DWDM, OSP cassette, 900um, 1m leads, No connectors. 100G, Start channel CHXX	620.00
Z1DWMY16CXX91NC	16 channel DWDM, OSP cassette, 900um, 1m leads, No connectors. 100G, Start channel CHXX	1,252.00
Z1DWMY20CXX91NC	20 channel DWDM, OSP cassette, 900um, 1m leads, No connectors. 100G, Start channel CHXX	1,560.00
Z1DWMY40CXX91NC	40 channel DWDM, OSP cassette, 900um, 1m leads, No connectors. 100G, Start channel CHXX	3,120.00

ITU DWDM Channels: 20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44,45,46,47,48,49,50,51,52,53,54,55,56,57,58,59,60

Note: "XX= 20" for starting channel 20 (1561.42nm)

Y=1 (100GHz spacing); 2 (200GHz spacing)

DWDM LGX PASSIVE MODULES

Dense Wavelength Division Multiplexing (DWDM) LGX (Light Guide Cross-connect) Modules are available in 2, 4, 8, 16, 20 and 40 channels. These passive modules utilize 100GHz or 200GHz channel spacing; this is represented in the part number by the variable Y (1=100GHz and 2=200GHz). These modules are available with ITU channels 20 – 60. The DWDM LGX modules are sold with LC/APC connectors (w/ adapters) and packaged inside of a cassette. The cassette is plug and play making installation quick and efficient. The LGX standard or foot print is widely used with rack and wall enclosure face plates. These modules are 1 RU (Rack Unit – 1.75 inches) and fit into a standard 19 inch enclosure. When ordering please note the starting channel (ex. Channel 20 = 20, Channel 40 = 40 etc.) as the two XX variables at the end of your part number.

PART #	DESCRIPTION	PRICE
Z1DWMY2CXX1LLA	2 channel DWDM, LGX, LC/APC connectors, 100G, Start channel CHXX	\$172.00
Z1DWMY4CXX1LLA	4 channel DWDM, LGX, LC/APC connectors, 100G, Start channel CHXX	326.00
Z1DWMY8CXX1LLA	8 channel DWDM, LGX, LC/APC connectors, 100G, Start channel CHXX	650.00
Z1DWMY16CXX1LLA	16 channel DWDM, LGX, LC/APC connectors, 100G, Start channel CHXX	1,300.00
Z1DWMY20CXX1RLA	20 channel DWDM, 1RU 19inch Rackmount enclosure, LC/APC connectors, 100G, Start channel CHXX	1,640.00
Z1DWMY40CXX1RLA	40 channel DWDM, 1RU 19inch Rackmount enclosure,, LC/APC connectors, 100G, Start channel CHXX	3,240.00

ITU DWDM Channels: 20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44,45,46,47,48,49,50,51,52,53,54,55,56,57,58,59,60

Note: "XX= 20" for starting channel 20 (1561.42nm)

Y=1 (100GHz spacing); 2 (200GHz spacing)



**CWDM
LGX Passive Modules**



**DWDM
OSP and LGX Passive Modules**



DID YOU KNOW...


**Insertion Loss For
Multi-Splitter /
Couplers**

WDM technology allows for massive data thru-put over optical fiber. These technologies are often used to increase the capacity of legacy fiber optic systems.

Insertion Loss For Multi-Splitter / Coupler

Split Ratio (%)	Typical Insertion Loss (dB)
1x2	<4.0
1x4	<7.2
1x8	<10.6
1x16	<13.7
1x64	<16.6
2x2	<4.0
2x4	<7.6
2x8	<11.2
2x16	<14.4
2x32	<18.0

COMMScope® COMMScope FOSC 450 FIBER OPTIC GEL CLOSURE

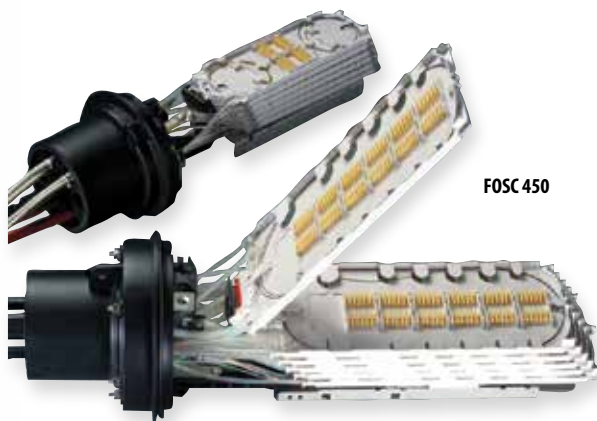
FOSC 450

- Splice trays are hinged for direct access to any splice without disturbing other trays
- Can be used in aerial and burial conditions
- Gel seal automatically adjusts to cable size and shape without tools
- **Splice trays not included**

Closure	A4	B6	D6
Dimensions (inch) (Including Clamp)	8.5"	10"	12"
Length	19"	21"	30"

Splice Capacity	A4	B6	D6
Number of Trays	4	6	8
Single Fiber	96	144	768
Ribbon (12F)	144	288	1152
Cable Ports	4 Ports	6 Ports	6 Ports

A4: 2 small ports, each for cables .3-.9 inch diameter., 2 large ports for cable .4-1.1 inch diameter
 B6 - D6: 6 ports, each for cable .35-1.0 inch diameter


FOSC-ACC-D-72

FOSC-ACC-B-24

FOSC-ACC-A-24

PART #	DESCRIPTION	PRICE
FOSC450A42NT0A1V	COMMScope "A" Closure, 4 round ports, holds up to 96 splices (8"W x 19"L) - Splice Trays Not Included	\$140.00
FOSC450B66NT0B3V	COMMScope "B" Closure, 6 round ports, holds up to 144 splices (10"W x 24"L) - Splice Trays Not Included	300.00
FOSC450D66NT0D3V	COMMScope "D" Closure, 6 round ports, holds up to 768 splices (11.5"W x 30"L) - Splice Trays Not Included	470.35

COMMScope ACCESSORIES & SPLICE TRAYS

Commscope splice trays are manufactured for specific style closures. Be sure to match the type of closure to correct splice tray. Trays range from 12 count to 72 count single fiber splices.

PART #	DESCRIPTION	PRICE	PART #	DESCRIPTION	PRICE
FOSC-ACC-A-12	Splice tray for "A" closure 12 Count (box of 2)	\$33.95	FOSC-ACC-D-72	Splice Tray for "D" Closure, 72 Count Capacity (box of 2)	\$80.00
FOSC-ACC-A-24	Splice Tray for "A" Closure 24 Count (box of 2)	39.95	FOSC-ACC-CABLESEAL1NT	Cable Sealing Kit for 1 round port cable	27.95
FOSC-ACC-B-12	Splice Tray for "B" Closure 12 Count (box of 2)	37.95	FOSC-ACCDISKETTALL	Fiber Slack Storage Basket	34.65
FOSC-ACC-B-24	Splice Tray for "B" Closure 24 Count (box of 2)	45.00	SMOUV-112001	60mm Splice Sleeve (100pk)	33.75
FOSC-ACC-D-36	Splice Tray for "D" Closure 36 Count (box of 2)	66.95	SMOUV-112002	45mm Splice Sleeve (100pk)	29.95

PART #	DESCRIPTION	PRICE
FOSC-ACC-AERIALCLAMPS	(2) Hanger Brackets and Clamps, (2) Snaplock Clamps, (2) Lashing Straps for FOSC450 Closures	\$35.00
FOSC-ACC-WALLPOLEMOUNT	FOSC450 Closure Wall/Pole Mount Hardware	42.65
FOSC-ACC-LASHINGSTRAPS	(2) Metallic Lashing Straps, (2) Nylon Lashing Straps and (4) Cable Spacers for FOSC450 Closures	24.50


FOSC600D8BNT0D0V

COMMScope FOSC 600 SERIES FIBER OPTIC SPLICE CLOSURE

- 4 Multi-Out Ports (16 Cables)
- Butt or Inline Splice Closure With Gel Sealing Technology
- Compatible With Most Existing Cable Constructions (Loose Tube, Central Core)
- Splicing Capacity, Single Fusion, Maximum 864
- Splicing Capacity, Mass Fusion, Maximum 1,728

PART #	DESCRIPTION	PRICE
FOSC600D8BNT0D0V	Closure, Single Fusion, Splicing Capacity maximum 864, for Loose Tube Cable (No Splice Tray Included)	\$645.00

CORNING

CORNING 2178 SERIES CLOSURES (SPLICE TRAYS NOT INCLUDED)

Corning Fiber Optic Splice Closure 2178 is engineered to meet common needs and field conditions, with different sizes to accommodate varying splice counts. 2178 Closures are made of a tough chemical-resistant material and have a gasket seal, making them ideal for a wide variety of applications. All 2178 closures are designed to be easy to install, easy to use and easy to re-enter.

- Full range of sizes - Fits your specific application
- No special tools required (standard torque wrench) - Easy installation and re-entry
- Constructed of a highly chemical-resistant material - Can be deployed in most applications: buried, underground and aerial
- Gasket seals - Reusable for easy re-entry

PART #	DESCRIPTION (SPLICE TRAYS NOT INCLUDED)	PRICE
2178-XSBEGOT	Compact Splice Case (14.5"L x 10"W x 4.6"H), up to 48 splices, butt splice only, use 2532 splice tray	\$257.950
2178-S	Small Splice Case (21.9"L x 8.5"W x 4.7"H), up to 96 splices, use 2522/2523 splice trays	282.65
2178-LS	Standard Splice Case (21.9"L x 8.5"W x 8"H), up to 192 splices, use 2522/2523/2524FT trays	455.00
2178-LL	Large Splice Case (21.9"L x 8.5"W x 11.3"H), up to 312 splices, use 2522/2523/2524FT trays	512.00

CORNING FIBER OPTIC SPLICE TRAYS AND OSP ACCESSORIES FOR 2178 SERIES

PART #	DESCRIPTION	PRICE
2532	Splice tray for 2178XSB, stackable/entry-exit both ends, up to 24 single fusion splices	\$30.29
2524-FT	Fusion splice organizer tray, holds 24 single fusion splices (splice inserts included)	66.85
2522	Fiber splice organizer tray - small (holds 2 chips/24 fiber) (11.5"L x 4"W x .75"H)	38.55
2523	Fiber splice organizer tray - large (holds 4 chips/48 fiber) (15"L x 4"W x .75"H)	43.80
2521F	Single fusion splice inserts (2 pack) -Fit 2522,2523,2527 trays (12 splices per insert)	14.50
2183-HAB	Gasket for 2178LS series splice cases	50.30
2527	Fiber Splice Organizer Tray - 24 single fusion	47.30
4414	CORNING Cable Cleaning Kit	59.85
4460-DF0	CORNING Scotchlok Shield Bond Connector Assembly	7.95

IN-LINE RUNT CLOSURES & ACCESSORIES (Splice Trays NOT Included)

This family of closures offers a wide variety of applications from aerial to direct burial installations.

PART #	DESCRIPTION	PRICE
8006951	In-Line Runt Closure (10" x 3.5" x 17.5") holds 2 splice trays, up to 24 single fiber splices, includes (4) 2-Hole	\$157.78
80806033	Standard Splice Tray 12ct	27.78
80807701	Low Profile 12ct Splice Tray	27.78
8003490	Blue Felt Tape, Adhesive Back, (6) Strips for use with Splice Trays	7.50

COYOTE® DTC

The COYOTE DTC (Drop Termination Closure) offers a compact size and a rugged exterior that is designed to allow for installation in tight spaces without compromising functionality. Four corner ports provide flexibility during installation. The DTC is ideal for quick restoration of damaged or cut fiber service drops or last mile FTTH applications.

PART #	DESCRIPTION	PRICE
COYDTC-001	COYOTE DTC for Flat and Small Drop Cables - Includes (4) 1-Hole Grommet 0.17" - 0.25" (4.3 - 6.4 mm) and Flat Drop Cables, (2) LITE-GRIP Single Fusion Splice Blocks, (1) LITE-GRIP Mass Fusion Splice Block and Cable Restraint Hardware	\$42.85



2178XSBEGOT



2178-S



2178-LS



Coyote®
In-Line Runt



DID YOU KNOW...

REPEATABILITY EXPECTATIONS TESTING CABLE ASSEMBLIES

When a manufacturer provides cable assemblies with documented test results it may be difficult to replicate the same performance results in the field. First, it's unlikely that both parties are utilizing the same optical testers, most power meters which provide insertion loss measurements have an uncertainty of 5%, in some instances this can be as much as 0.2dB. If comparing results within this threshold it could prove more useful to focus on overall loss budget of optical link rather than individual component. Second variable is often the reference cords, high grade reference cords are often not as accessible in the field, therefore standard grade cords are implemented and according to TIA-568 standard this could vary test results by 0.25dB per mated pair versus utilizing reference jumpers. Third item to consider is mating sleeve which should utilize Zirconia split sleeve for precision alignment. Lastly, is cleanliness and inspection of the connector end faces as it is a necessity to confirm both connectors are free from damage or debris prior to testing or repeatability will be impossible.





APEX X-1 Closure



APEX X-2 Closure



LG-500

LG-250

AFL APEX X-1 CLOSURES

The APEX X-1 is capable of up to 144 single fusion, 432 mass fusion with standard ribbon, or 864 mass fusion with "rollable ribbon" fiber types such as AFL's SpiderWeb Ribbon® (SWR®). Cables are sealed by a unique wedge system spaced evenly around the circumference of the closure's base. Each cable seal is opened by a press-to-release lever and sealing is completed by actuating a single screw for each cable. Up to three splice trays are attached and hinge off a central organizer. A plastic slack storage basket resides underneath the trays with ample tie down points for managing tube and fiber slack. Four cable ports, capable of 8 drop cables with expressed distribution cable using multi-drop entry kit. Dimensions 19" x 9", Weight 10 lbs.

PART #	DESCRIPTION	PRICE
AX1BL121X	APEX X-1 Closure, No Basket, (1) Tray Included, 2 Cable Entry Kits and (1) Grounding Lug	\$195.00
AX1BL120X	APEX X-1 Closure, No Basket, (1) Tray Included, 2 Cable Entry Kits, No Ground Lug	185.00
AXTRAY2S1	APEX Splice Tray with (1) Splice Module, 18 Splice Triple Stack, 24 Splice Quad Stack, 144ct Mass	14.25
AXTRAY2S2	APEX Splice Tray with (2) Splice Module, 36 Splice Triple Stack, 48 Splice Quad Stack, 144ct Mass	15.95
AXPEXUSTAND	Apex Closure Workbench Universal Installation Stand	490.00

AFL APEX X-2 CLOSURES

APEX X-2 closures are designed for above or below grade applications in butt configuration. X-2S is capable of 216ct single fusion or 432 ribbon splices. Cables sealed with unique wedge system, each cable opened by press-to-release lever and is individually sealed with tool-less mechanism.

APEX-2S: Dimensions: 20" x 12", Weight 22lbs(no trays), Splice Capacity 216 Single/432 Mass, Tray Capacity is 6, Single Port Cable OD 10-28mm, Multi-Drop Port Cable OD 5-9.9mm.

PART #	DESCRIPTION	PRICE
AX2SBX022X	AX-2S Closure with Basket, No Trays Installed, 2 Strain Relief Kits and 2 Ground Lugs	\$270.00
AXTRAY2S1	X-2S Splice Tray with One Splice Module 36 Single Splices or 144 Ribbon Fiber Splices	14.25
AXTRAY2S2	X-2S Splice Tray with Two Splice Modules 72 Single Splices or 576 Ribbon Fiber Splices	15.95
AXKITAERIAL1	X-2S Aerial Strand Mount Hanger Kit	49.00
XABR30	X-2S Pole/Wall Mount Hanger Kit	105.00

APEX-2: Dimensions: 25" x 12", Weight 25lbs(no trays), Splice Capacity 432 Single/864 Mass, Tray Capacity is 6, Single Port Cable OD 10-28mm, Multi-Drop Port Cable OD 5-9.9mm.

PART #	DESCRIPTION	PRICE
AX2BX022X	AX-2 Closure with Basket, No Trays Installed, 2 Strain Relief Kits and 2 Ground Lugs	\$325.00
AXTRAY22	X-2 Splice Tray with One Splice Module 18 Single Splices or 72 Ribbon Fiber Splices	18.95
AXTRAY24	X-2 Splice Tray with Two Splice Modules 36 Single Splices or 288 Ribbon Fiber Splices	22.95
AXKITAERIAL1	X-2 Aerial Strand Mount Hanger Kit	49.00
AXBR30	X-2 Pole/Wall Mount Hanger Kit	105.00
FC001567	Silicone Spiral Wrap 5.5FT for routing fibers inside Enclosure	21.95
FC001759	Velcro for securing bundles in Slack Basket, 75 ft length	31.95

AFL LG-500 AERIAL FIBER OPTIC CLOSURE

This aerial weather tight fiber optic splice closure is for small to medium counts up to 72 fiber (or 288 ribbon fiber). Splice trays are available for single, mass or mechanical splicing. **Splice Trays Not Included**

- Four individual, self-sizing grommeted cable ports
- Accommodates cables sizes 0.77" - 0.3"
- Holds (3) single fiber trays, holds (2) mass fiber trays
- Weight 6.4 lbs, Dimensions 24" x 8.25" x 4"

PART #	DESCRIPTION	PRICE
FC000026	LG-500 Aerial Compact Splice Closure with standard aerial hangers (no splice trays included)	\$155.00
911289-00-02	Universal splice tray (1) 24 fiber single fiber chip/(1) dual ribbon splices and VHB tape for mechanical splices	31.95

AFL LG-250 AND LG-350 SEALED FIBER OPTIC CLOSURE

This sealed dome closure is for medium count fiber splicing up to 96 fibers (288 ribbon) in a butt configuration. Can be utilized for aerial or underground applications where a sealed closure is required. Requires no tools for re-entry. **Splice Trays Not Included**

- Supports loose tube, central tube, dielectric and armored cable constructions
- 5 Cable ports and fully kitted with all parts to install five cables
- Holds (4) single fiber trays, (2) Ribbon fiber trays or (3) Mechanical splice trays
- Accommodates cables sizes 0.77" - 0.3", Weight: 11.5 lbs, Dimensions 19" x 8.75"

PART #	DESCRIPTION	PRICE
FC000002-PS	LG-250 Dome Closure with 5 cable kits for sealing and retention. (No splice trays, hanger brackets)	\$325.00
FC000009-PS	Dome Enclosure 288 Single or 864 Mass Fusion Capable 5 Cable Kits for Sealing & Retention	405.00
911289-00-02	Universal Splice Tray (1) 24 fiber single fiber chip/(1) dual ribbon splices and VHB tape for mechanical splices	31.95
FC000655	3-port flat drop grommet for standard size drops for LG 150/250	20.00
911676-00-02	LL-4896 Universal Splice Tray—Stores (96) single fusion splices or (24) mass fusion splices (288 F). Maximum of 5 trays in the LG-350	52.00
FC000726	LG-350 Single Grommet Kit (Min. 0.40" - Max. 1.00")—For use in LG-350/AC/SD on Express Port side	28.95
FC000337	LG-350 Dual Grommet Kit (Min. 0.26" - Max. 0.44")—For use in LG-350/AC/SD on Express Port side	29.95
FC000421	LG-350 Quad Grommet Kit (Min. 0.26" - Max. 0.38")—For use in LG-350/AC/SD on Express Port side	25.95
FC000727	LG-350 Single Grommet Kit (Min. 0.26" - Max. 0.80")—For use in LG-350/AC/SD on Drop Port side	28.95
FC000422	LG-350 Drop 4 Flat Drop Grommet Kit—For use with standard flat drop cable and round cable up to 0.25" O.D.	15.95

COYOTE ONE DOME CLOSURE

(Splice Trays NOT Included)

PART #	DESCRIPTION	GROMMETS	PRICE
COY1-001	Coyote One Closure, 16" x 10" x 5.7", 3-section endplate, holds 2 Lite-Grip or 5 low profile short splice trays	8003663 8003676	\$190.00
COY1-002	Coyote One Closure with Universal Organizer for Ribbon or Buffer Fiber		190.00
80811036	6 Part Drop Cable Retention Bobbin Kit		6.30
80811037	4 Part Drop Cable Retention Bobbin Kit		6.30
8004032	ADSS Mount Bracket Offset Adjustable		32.65
EVOBKTPWM	Pole / Wall Mount Bracket		51.30
8003835	Handhole Mounting Bracket		25.55
80809958	24ct Fusion Splice Tray		26.95
LGSTR144	144ct Ribbon Mass Fusion Tray		23.85



COY1-001


Grommet Cable Entry for COYOTE Dome Closures

LOW COUNT CLOSURES (Splice Trays NOT Included)

- LCC Closure (Splice Tray Included)
- Designed for Round or Flat Drop Cable
- Max Splice Capacity - 24 single fusion / 72 ribbon fibers
- In-Line or Butt application

- Compact Size: 17" x 7" x 2.5"
- Designed for direct buried, below grade, pole/wall mount or aerial applications

PART #	DESCRIPTION	INCLUDED SPLICE TRAYS/BLOCKS	INCLUDED GROMMETS	PRICE
COYLCCF-001	LCC for Single Fusion Splices	(3) single fiber LiteGrip Splice Blocks	(1) 7-hole, (1) 12-hole	\$54.00
COYLCCF-002	LCC for Single Fusion Splices with Strength member Bobbin Kit	(3) single fiber LiteGrip Splice Blocks	(1) 7-hole, (1) 12-hole	58.25
COYLCCF-004	LCC for Single Fusion Splices	(3) single fiber LiteGrip Splice Blocks	(2) 7-hole	55.15
COYLCCF-005	LCC for Single Fusion Splices	(3) single fiber LiteGrip Splice Blocks	(2) 2-hole	55.15
COYLCCF-006	LCC for Single Fusion Splices	(3) single fiber LiteGrip Splice Blocks	(2) 4-hole	55.15
8003832	Aerial Mounting Bracket for LCC			9.50

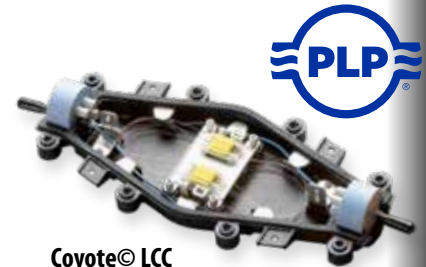

Coyote© LCC



LGSTS40

COYOTE DOME CLOSURES (Splice Trays NOT Included)

PART #	DESCRIPTION	GROMMETS	PRICE
8006877	Dome (6.5" x 22") 4-section endplate, holds 3 Lite-Grip or 6 low profile Long Splice Trays	8003701	\$355.95
8006944	Dome (6.5" x 17") 4-section endplate, holds 3 Lite-Grip or 6 low profile Short Splice Trays	8003701	222.00
80061055	Dome (9.5" x 28") 7-section endplate, holds 7 Lite-Grip or 13 low profile Long Splice Trays, with Buffer Tube Organizer	8003692 / 8003693	481.30
800013691	Dome (9.5" x 19") 7-section endplate, holds 6 Lite-Grip or 12 low profile Short Splice Trays	8003692 / 8003693	394.25
LGSTS16	Lite Grip Splice Tray Kit, Short Tray, includes 2 splice blocks to support up to 16 Single Fusion Splices		23.80
LGSTS40	Lite Grip Splice Tray Kit, Long Tray, includes 5 splice blocks to support up to 40 Single Fusion Splices		31.40
LGSTS72	Lite Grip Splice Tray Kit, Deep Profile, Long Tray, up to 80 Single Fusion Splices		35.50
8004035	Aerial hanger bracket for Dome Closure		30.90
8003663	2-entry grommet for .42-.60" port for Corning SST Cable		14.10
80807701	12ct Low Profile Short Tray with Splice Block		27.80
8001127	36ct Low Profile Long Tray with Splice Block		50.75
8080514	36ct Splice Tray		54.25
80809958	24ct Short Splice Tray		26.95
8003702	Pole/Wall Mount Bracket		31.20

8006877

COYOTE Dome
6.5" x 22"



FIS FLEXIBLE CABLE SPLICE PROTECTOR

The FIS Flexible Cable Splice Protector is an ideal solution for protecting fiber optic splices in challenging field conditions. This rugged, easy-to-install splice protector accommodates up to 12 splices with mini or micro protection sleeves, protecting them from moisture, vibration, shock and other adverse environmental conditions.

- Use for singlemode or multimode fibers • Accommodates 25-60mm long splice sleeves
- 5" Minimum bend radius (Flexible center portion only) • Dimensions: 13.75" (L) x 1.35" (W)

PART #	DESCRIPTION	PRICE
F1-FLEXSPLC	FIS Flexible Cable Splice Protector	\$106.95




F1-FLEXSPLC

Grommets for New Breed of COYOTE Closures

PRICE	8003701	8003691	8003692	8003693	8003694	8003663	8003664	8003665	8003676	8003677	8003796
1-9 \$11.25 Each											
10+ \$10.50 Each											
Hole Range (in)	.42-.60 in. .60-.85 in	.42-.60 in.	.60-.85 in	.85-1.0 in	1.0-1.25 in.	.42-.60 in.	.30-.43 in.	.125-.25 in. and Flat Drop	.42-.60 in. .125-.25 in. and Flat Drop	.125-.25 in. and Flat Drop	.125-.25 in. Flat Drop Only



COYOTE® PEDESTAL

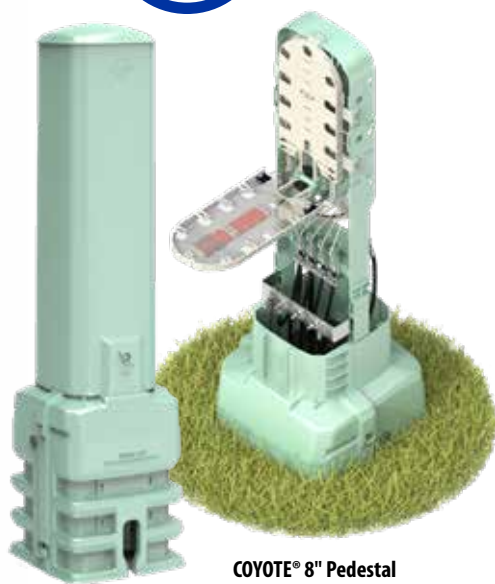

COYOTE® 8" Pedestal

COYOTE Pedestals provide easy customization options to adapt to your fiber or copper splicing needs at each location in your network. Each pedestal is pre-assembled and can be configured to accept various fiber optic splice tray types, fiber or copper terminals, fiber cross-connect bulkheads, or management brackets for copper splices. In addition, the organizer can be removed and a slotted metal back plane can be inserted into the base to attach fiber closures and cabinets, such as the COYOTE PedBox®, to provide additional protection for your splices. The versatility that COYOTE Pedestals provide allow you to create the network you desire.

- Currently available in 8" size. 6" and 10" versions available
- Each pedestal size is pre-assembled with a base, automatic locking cover, and internal organizer with a grounding busbar
- Cover and base are manufactured out of a UV/FR stabilized polycarbonate that will withstand weathering
- Split base design for easy installation around pre-installed duct/cables and replacement of existing pedestals
- Automatic cover locking system (patent pending)
- Grounding busbar isolates connections and is equipped with a ground wire terminal (#4 – #10)
- Organizer can be configured for various fiber and copper applications - splicing, terminals, and cross-connect applications
- Organizer can accommodate COYOTE Flip Trays, LITE-GRIP® Splice Trays, and Legacy Splice Trays
- All fasteners are constructed of stainless steel to prohibit corrosion and can be secured or loosened with common tools (216 can wrench, 1/4" nut driver, or Philips screwdriver)
- Designed in accordance to GR-13-CORE rated requirements

COYOTE® PEDESTAL ORGANIZER ATTACHMENT OPTIONS



COYOTE® Flip Trays for Fiber Splicing



COYOTE LITE-GRIP® Splice Trays for Fiber Splicing



Cross-Connect Bulkhead for Fiber Splicing and Patching



Terminal Bracket for Fiber or Copper Terminals



Routing Handles for Copper Splicing



Metal Back Plane for Closure or Cabinet Mounting

CALL AND SPEAK WITH AN FIS SALES REPRESENTATIVE FOR PRICING



FIS POLYMER CONCRETE HANDHOLE/VAULT

FIS underground vaults are designed to grant seamless access to fiber optic cables and various utilities for splicing and repairs. These versatile structures go by different names such as pull boxes, splice boxes, underground enclosures, or vaults. Crafted with precision, each Handhole/Vault boasts polymer concrete construction and features a top-notch Tier 22 Lid for added durability and reliability. Elevate your infrastructure with FIS underground solutions, ensuring a robust and efficient network for your needs.

PART #	DESCRIPTION	DIMENSION	PRICE
Z1-APC121212PCT22	Polymer Concrete Handhole with Tier 22 Lid	12"x12"x12"	\$313.50
Z1-APC111818PCT22	Polymer Concrete Handhole with Tier 22 Lid	11"x18"x18"	321.50
Z1-APC132418PCT22	Polymer Concrete Handhole with Tier 22 Lid	13"x24"x18"	332.50
Z1-APC173024PCT22	Polymer Concrete Handhole with Tier 22 Lid	17"x30"x24"	495.00
Z1-APC243624PCT22	Polymer Concrete Handhole with Tier 22 Lid	24"x36"x24"	695.00
Z1-APC304824PCT22	Polymer Concrete Handhole with Tier 22 Lid	30"x48"x24"	975.50
Z1-APC304836PCT22	Polymer Concrete Handhole with Tier 22 Lid	30"x48"x36"	1,100.00
Z1-APC366036PCT22	Polymer Concrete Handhole with Tier 22 Lid	30"x60"x36"	1,695.50

AFL FIBER STORAGE UNITS

AFL Fiber Storage Units (FSU) are used to conveniently and safely store an extra length of cable along the support strand for later use. Sold as pairs (kit contains 2 FSUs and 2 sets of hanger brackets). FSUs are constructed from dielectric polypropylene with UV inhibitor or aluminum with baked acrylic enamel finish. All basic hardware for attachment to the support strand is provided. Galvanized strand clamping devices accommodate 1/4" to 7/16" strand.

PART #	DESCRIPTION	PRICE
FA000004	FOSP-12-TMK Dielectric pair 12" with Horizontal Bracket	\$47.95
FA000002	FOSP-17-TMK Dielectric pair 17" with Horizontal Bracket	69.00



PLP SNOW SHOES – FIBERLIGN IN-SPAN STORAGE

Preformed Line Products' aerial cable attachment hardware solutions use innovative Cable Capture Tabs to efficiently manage cable slack making them simpler, easier and quicker to install with fewer cable ties. This saves time and money and makes adjustments for slack loop length easy. The unique CLAS system can be used with either ADSS or lashed applications and simply folds over the cable and straps in place without needing any mounting hardware. CLAS units include cable ties. Abrasion protection guides are standard with the CLAS system and optional for the other styles. Optional block style Uni-Group cable guides are also available for all styles. Please contact FIS for these options.

PART #	DESCRIPTION	PRICE
FIS-12A	12" ADSS Mount Snow Shoe (one pair)	\$55.95
FIS-12M	12" Strand Mount Snow Shoe (one pair)	55.95
FIS-16A	16" ADSS Mount Snow Shoe (one pair)	58.25
FIS-16M	16" Strand Mount Snow Shoe (one pair)	58.25
710012375A	20" CLAS Universal Snow Shoe System (one pair)	115.00



FIBERLIGN DROP CABLE STORAGE BRACKETS

Stores slack cable in aerial, pole mount, vault and wall entrance installations. Stores flat drop cable and round drop cable up to 0.40" OD. 8" diameter size, All Dielectric, UV Resistant, Safe for Long Term Use. Stackable, Provides multi-level slack management.

PART #	DESCRIPTION	PRICE
FDC8	Fiberlign Drop Cable 8" Single Storage Bracket, Vault/Wall Service Entrance	\$29.95
FDC8M	Fiberlign Drop Cable 8" Single Storage Bracket, Aerial Lashed Messenger Systems	31.95
FDC8A	Fiberlign Drop Cable 8" Single Storage Bracket, Aerial ADSS Systems	32.65
FDC8P	Fiberlign Drop Cable 8" Single Storage Bracket, Wood Pole	31.95
7400029	Messenger Hanger Bracket	7.95
7400028	ADSS Hanger Bracket	7.95
7400030	FDC8 Stacking Kit with Spacers	7.95



FIBER OPTIC SNO SHOES

The plastic Sno Shoe is used to store additional lengths of fiber along the strand for later use. Sno Shoe is a durable and cost effective tool for storing fiber optic cable in the air. Adjustable Sno Shoes can be used aerially with standard tap brackets or the optional ADSS brackets. It can be mounted directly to the pole, or even in a manhole – anywhere you would want to store all of the slack at one location. Sno Shoes sold per pair.

PART #	DESCRIPTION	PRICE
2110-SSPTB	10" Plastic Sno Shoe with Strand Mount Only Hardware (one pair)	\$40.75
2116-SSPTB	16" Plastic Sno Shoe with Strand Mount Only Hardware (one pair)	37.25
2116-SAPT	16" Plastic Adjustable Sno Shoe with Pole Mount Only Hardware (one pair)	62.60
2116-SSPSS	16" Plastic Sno Shoe with ADSS Hardware (one pair)	49.50



FIBER OPTIC DROP CABLE CLAMPS

PART #	DESCRIPTION	PRICE
SI097210	Fiber Optic Dropwire Clamp(10pk)	\$35.00
SI09725BLEA10	Fiber Optic Drop Cable Clamp for Butterfly Style(10pk)	13.35



CABLE



RE-SPOOLING SERVICE

We cut and spool fiber or cable to your specified lengths



POF-KIT

CABLE | CUSTOM MANUFACTURED CABLE

Fiber Instrument Sales, Inc. (FIS) is able to provide UL approved and RoHS compliant custom manufactured fiber optic cable. These cables are available in a variety of standard configurations as well as custom built to your specifications. Standard fiber optic cable including simplex, duplex and multifiber styles are in stock for quick delivery. In addition, our extrusion machines are capable of manufacturing fiber optic cable with different jacket colors, coating diameters, fiber counts, tight buffer diameters, jacket materials and more. To request additional information regarding custom cable, call your FIS sales representative today! Please note: Cable is printed with only core/clad, fiber length and UL markings.

CABLE BUYING GUIDELINES

1. We strive to cut the cable that you order to the exact length that you request. This is not always possible, so following industry standard practice regarding cable, for shipping and billing purposes, we will not ship less than the amount that you order, but we may ship and bill up to 10% more than the length you specify when placing your order. (Allowable cable length for shipping and billing purposes is -0/+10%).
2. Cable cut/spool fees may apply on custom lengths. Please contact your FIS Sales Representative for pricing.
Spools \$12-\$19ea.
Cut fee \$25-\$50 per (based on length, type of cable).
Full Spool Purchase = No Cut / Spool Fee.

3. Cut charges do not apply when cable reels that are in stock are offered and accepted.
4. Minimum order quantities on non-stock cable will be required.
5. OS2 SM, OM3 MM, and OM4 MM Bare Ribbon Fiber is offered. In stock spool lengths of 153 meters, 305 meters, 610m, 915m, 1,525m, and 2,000 meters. We have the ability to custom cut lengths up to, but not exceeding 100 meters. If you require a custom cut length greater than 100 meters, a \$25.00 cut fee and 2-3 week lead time will apply. The cut fee covers up to 4 cuts, an additional fee will apply to 5 or more custom cuts. **This is for ribbon fiber only.**

Call for High Quantity Cuts / Spool Charges.

THREE-PIECE SPOOL

The three-piece spool features plastic flanges bolted to a kraft barrel, creating a durable, dimensionally true and splinter-free reel. Flange diameter is 12", 14" or 18" while the barrel diameter is 8.25", making it perfect for bulk cable or long assemblies. Three fastening bolts used. Unassembled versions available reducing shipping cost and storage space.

PART #	DESCRIPTION	PRICE
F1-12SPOOL	Three Piece Spool - 1.75 Arbor Hole - 12"x 9" x 6"	\$11.95
F1-14SPOOL	Three Piece Spool - 1.75 Arbor Hole - 14"x 9" x 6"	9.65
F1-18SPOOL	Three Piece Spool - 1.75 Arbor Hole - 18"x 15.5" x 7.75"	17.95

TLC PLASTIC FIBER OPTIC CABLE AND ACCESSORIES

TLC plastic optical fiber cables are designed for short data transmission applications. The standard product is a 2.2mm jacket over 1.0mm step index PMMA plastic fiber. Standard colors are red and black, other colors are available upon request.

PART #	DESCRIPTION	DIA.	PRICE
P96TB01TRBL22	980/1000µm Core Simplex Plastic Fiber (Black)	2.2mm	\$1.75 /Mtr.
P96TD02TRBL44	980/1000µm Core Duplex Plastic Fiber (Black)	2.2/4.5mm	3.75 /Mtr.
POF-KIT	Plastic Fiber Optic Tool Kit		\$175.00
POF-HKN	Hot Knife for Cutting Plastic Fiber of all Diameters		31.50
F1-0065	ST Connector 1mm Stainless Alloy Ferrule for Plastic Fiber		4.45



DID YOU KNOW... 10 GIG, CLEARCURE® & BEYOND

What is OM1, OM2, OM3 and OM4 MULTIMODE CABLE?

Gigabit Cables are designed with ClearCurve® optical fibers, engineered for laser-based local area network protocols such as Gigabit Ethernet. Thanks to Corning's latest innovation, the new SMF-28® Ultra optical fiber was the first in the market to combine the benefit of industry-leading attenuation and improved macrobend performance in one fiber. TLC will also customize materials and constructions to meet your individual requirements.

FIBER TYPE	STANDARD DESIGNATION	JACKET COLOR (typical)	MAXIMUM ATTENUATION (dB/km)			TRANSMISSION DISTANCE FOR (in meters)				MINIMAL MODAL BANDWIDTH (MHz/km)			
			850nm	953nm	1300nm	1 Gb/s	10 Gb/s	40 Gb/s	100 Gb/s	OVERFILLED LAUNCH (OFL) 850nm	OVERFILLED LAUNCH (OFL) 1300nm	OVERFILLED LAUNCH (EMB) 850nm	OVERFILLED LAUNCH (EMB) 953nm
62.5/125	OM1	Orange	2.9	-	0.6	275	33	-	-	200	300	-	-
50/125	OM2	Orange	2.3	-	0.6	550	150	-	-	700	500	950	-
50/125	OM3	Aqua	2.3	-	0.6	550	300	100	70	1500	500	2000	-
50/125	OM4	Aqua	2.3	-	0.6	550	550	150	100	3500	500	4700	-
50/125	OM5 (WB)	Lime Green	2.3	1.7	0.6	550	550	150	100	3500	500	4700	2470

Corning® ClearCurve® optical fiber

ClearCurve® fibers are fully compliant with ITU-T G.652.D and G.657 standards. These fibers are designed to meet a wide array of applications including both inside and outside plant installations. Network designers, operators, and installers choose ClearCurve® fibers for their superior bending performance, backward compatibility with the G.652.D standard and their ability to minimize bend-loss throughout any installation. Use the chart, right, to aid in selecting the right ClearCurve® fiber for your application.

Corning Product	Application	ITU-T	Radius	Corning Spec
ClearCurve® ZBL optical fiber or ClearCurve® LBL optical fibers	• Virtually no bend-loss in most indoor applications • Very low loss in extreme (5mm) bend environments • Enables smaller components and flexible yet reliable networks	Exceeds G.657. A3/B3	5mm	<0.10 dB/turn
			7.5mm	
SMF-28® Ultra Optical Fiber	• Improved performance vs. standard singlemode fiber • Fully backward compatible with the installed base of legacy single-mode fibers. • Enables a broader range of cable design options and deployment flexibility	Exceeds G.657.A1	10mm	<0.50 dB/turn

CORNING® BARE FIBER (245µm)

For high-data-rate, long haul terrestrial, regional and metropolitan ring networks or local access and premise applications. Corning® offers fibers that are designed for greater capacity and flexibility. **Respooling capabilities are available.** *Quantity discounts available for large quantities.*

CORNING

PART #	DESCRIPTION (Spool Length -0/+10%)	50mtr	100mtr	500mtr	1000mtr	1000mtr+/- Spool
SMF-28e+®	Singlemode SMF-28e+® fiber OS2 G.652.D Compliant	\$20.00	\$30.00	\$50.00	\$90.00	8¢ mtr. + \$10.00
SMF-28® Ultra	Singlemode SMF-28® Ultra OS2 G.657.A1 Compliant	20.00	30.00	50.00	90.00	8¢ mtr. + \$10.00
SMFLF	Singlemode LEAF® Non-Zero Dispersion-shifted fiber, G.655 Compliant	25.00	35.00	65.00	120.00	11¢ mtr. + \$10.00
ClearCurve® ZBL	Singlemode ZBL Enhanced Bend Insensitive, G657A2/B2 Compliant	30.00	40.00	85.00	160.00	15¢ mtr. + \$10.00
InfiniCor® 300	InfiniCor® 300 Multimode OM1 62.5/125µm	30.00	40.00	80.00	140.00	13¢ mtr. + \$10.00
ClearCurve® OM2	ClearCurve® OM2 Multimode 50/125µm G.651.1 Compliant	30.00	40.00	80.00	140.00	13¢ mtr. + \$10.00
ClearCurve® OM3	ClearCurve® OM3 Multimode 50/125µm G.651.1 Compliant	32.00	43.00	105.00	210.00	20¢ mtr. + \$10.00
ClearCurve® OM4	ClearCurve® OM4 Multimode 50/125µm G.651.1 Compliant	35.00	45.00	165.00	310.00	30¢ mtr. + \$10.00

Attention Custom Lengths: The spools above can be shortened to specified length. Price = Cost of Fiber Spool (listed above) + Additional \$10 cutting to custom length.

TLC 900µm TIGHT BUFFER SINGLEMODE AND MULTIMODE CABLE

PART #	DESCRIPTION	PRICE
S09-TB01-CZNPW	White SM 9/125µm, OS2 Corning® SMF-28® Ultra fiber	18¢ /Mtr.
S09-TB01-CZNPB	Aqua SM 9/125µm, OS2 Corning® SMF-28® Ultra fiber	18¢ /Mtr.
S09-TB01-CZNPY	Yellow SM 9/125µm, OS2 Corning® SMF-28® Ultra fiber	18¢ /Mtr.
M62-TB01-C3NPW	White MM 62/125µm, Corning® ClearCurve® 300 fiber	23¢ /Mtr.
M62-TB01-C3NPO	Orange MM 62/125µm, Corning® InfiniCor® 300 fiber	23¢ /Mtr.
M50-TB01-C2NPO	Orange MM 50/125µm, Corning® InfiniCor® OM1 fiber	35¢ /Mtr.
M50-TB01-CGNPA	Aqua MM Corning® ClearCurve® OM3 fiber	35¢ /Mtr.
M50-TB01-C4NPA	Aqua MM Corning® ClearCurve® OM4 fiber	50¢ /Mtr.

* Minimum order quantity of 100 meters.

TLC FLAT RIBBON BARE FIBER - OS2 / OM1 / OM2 / OM3 / OM4

PART #	DESCRIPTION	PRICE
S09-RB12-CZ	12 Fiber Singlemode 9/125µm Bare 245µm - OS2	\$1.10 /Mtr.
M62-RB012-CI3	12 Fiber Multimode 62.5/125µm Bare 245µm - OM1, Corning® ClearCurve® 300	2.50 /Mtr.
M50-RB12-CG	12 Fiber Multimode 50/125µm ClearCurve® Bare 245µm - OM3	3.05 /Mtr.
M50-RB12-C4	12 Fiber Multimode 50/125µm ClearCurve® Bare 245µm - OM4	4.60 /Mtr.

CORNING® SPECIALTY PM PHOTONIC FIBERS

Corning® Specialty PM Photonic Fibers, designed with the best polarization maintaining properties in the world today, offer low attenuation and excellent birefringence for next generation network systems. The fibers are available in a wide range of standard operating wavelengths up to 1550nm, including 1400-1490nm optimized for Raman applications.

PART #	DESCRIPTION	PRICE
PM15-U25	Puremode™ PM 1550 with 250µm Dual Acrylate Coating (100KPSI)	\$11.75 /Mtr.
PM15-U40	Puremode™ PM 1550 with 400µm Dual Acrylate Coating (100KPSI)	12.95 /Mtr.
PM98-U25H	Puremode™ PM 980 with 250µm Dual Acrylate Coating (200KPSI)	14.25 /Mtr.

FIBERCORE LTD. POLARIZATION MAINTAINING FIBER

Fibercore's HB series polarization maintaining fiber (80 and 125 micron) with the characteristic "bow tie" stress applying parts gives you the very best in performance and handling.

PART #	DESCRIPTION	OPERATING WAVELENGTH	PRICE
HB1250P/001	Polyimide Coated PM Fiber (145µm coating) 6.6/125µm	1300nm	\$10.25 /Mtr.
HB1250T	PM Fiber for Telecom Applications (400µm coating) 9/125µm	1310nm	13.50 /Mtr.

CORNING® SPECIALTY HI PHOTONIC FIBERS

Corning® Specialty HI Photonic Fibers offer world class durability and reliability. When used as component pigtailed, this fiber allows for efficient fiber coupling within photonic products.

PART #	MAXIMUM ATTENUATION	CUTOFF WAVELENGTH	MODE-FIELD DIA.	PRICE
HI980-6	≤ 2.5dB/km @ 980nm	930 ± 50nm	4.2µm @ 980nm	\$2.50 /Mtr.
HI1060-6-H	2.1dB/km @ 980nm 1.5dB/km @ 1060nm	920 ± 50nm	5.9 ± 0.5µm @ 980nm 6.2 ± 0.5µm @ 1060nm	1.95 /Mtr.

* Minimum order quantity of 100 meters.

FIBERCORE LTD. SPECIALTY SINGLEMODE FIBER


Fibercore Ltd's Specialty Singlemode Optical Fibers (80 and 125 micron) have been proven to perform in a wide range of challenging applications for wavelengths from 450nm to 1500nm.

PART #	DESCRIPTION	OPERATING WAVELENGTH	PRICE
SM600	Singlemode Fiber 4.3/125µm (245µm coating)	633/688nm	\$3.60 /Mtr.
SM800	Singlemode Fiber 4.2/80µm (175µm coating)	830nm	4.35 /Mtr.

* Minimum order quantity of 100 meters.


TLC LARGE CORE FIBER CABLE

PART #	DESCRIPTION	PRICE
M10-SX01-LNRG	100/140µm 3.0mm Simplex (MM) Green	\$3.50 /Mtr.
M20-SX01-LNRB	200/230µm 3.0mm Simplex (MM) Blue	3.25 /Mtr.
M10-DX02-LNRG	100/140µm 3.0mm Duplex (MM) Green	4.75 /Mtr.
M20-DX02-LNRB	200/230µm 3.0mm Duplex (MM) Blue	5.25 /Mtr.



CABLE | SIMPLEX / DUPLEX - SINGLEMODE

FIS supplies the industry's broadest array of Fiber Optic Cable and Tubing for all Access and Premises Network Applications. These include Standard and Customized Simplex, Duplex, Tight Buffer, Distribution, Loose Tube Indoor/Outdoor and Ribbon Cable, as well as furcation tubing to fit various fanout applications.

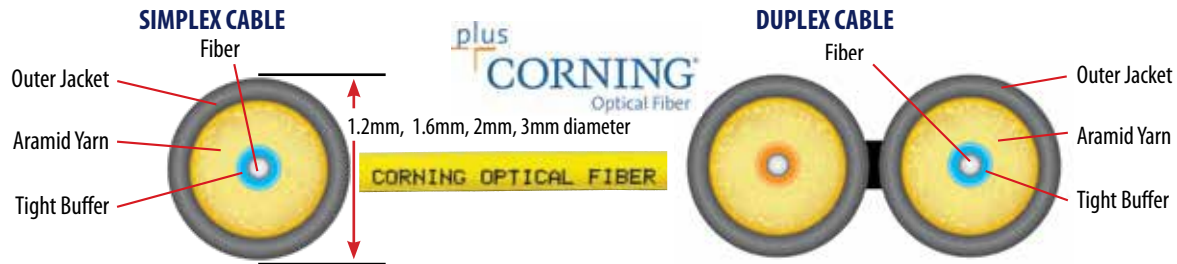

Corning's new SMF-28® Ultra optical fiber is the first in the market to combine the benefit of industry-leading attenuation and improved macrobend performance in one fiber. This premium single-mode fiber is designed for long-haul, metro, access, and fiber-to-the-home (FTTH) applications, and is fully backward compatible with the installed base of legacy single-mode fibers.

Corning® SMF-28® Ultra Fiber

Compatibility Matters.

- MFD equivalence and 100% compatibility to G.652.D fiber allows for seamless integration into existing networks

Bend Matters.

The same improved bend performance of Corning® ClearCurve® XB fiber:

- 33% better bend than G.657.A1 standard
- Capacity robustness: NGPON, WDM PON

Simplicity Matters.

- One fiber everywhere to minimize inventory management complexity


Loss Matters.

The same industry leading low-loss of Corning® SMF-28e+® LL fiber:

- Capacity robustness: 100G, 400G, Next Gen PON
- Low-cost capacity: less equipment, longer reach
- Enhanced Fixed-Mobile broadband coverage
- Repair resilience

Four huge benefits.
One amazing fiber.
Ultra has arrived.

CORNING

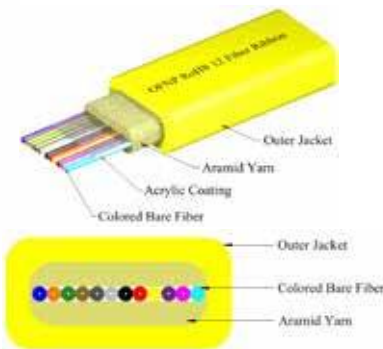

TLC FLAT RIBBON CABLE PVC JACKETED - OS2 / OM1 / OM2 / OM3 / OM4

PART #	DESCRIPTION	PRICE
S09-RB12-CZNR	12 Fiber, Singlemode 9/125µm, Riser, Jacket Yellow - OS2	\$1.15 /Mtr.
S09-RB12-CZNP	12 Fiber, Singlemode 9/125µm, Plenum, Jacket Yellow - OS2	1.25 /Mtr.
M50-RB12-CGNRA	12 Fiber, Multimode 50/125µm, Corning® ClearCurve® OM3 fiber, Riser, Jacket Aqua	3.25 /Mtr.
M50-RB12-CGNPA	12 Fiber, Multimode 50/125µm, Corning® ClearCurve® OM3 fiber, Plenum, Jacket Aqua	2.75 /Mtr.
M50-RB12-C4NPA	12 Fiber, Multimode 50/125µm, Corning® ClearCurve® OM4 fiber, Plenum, Jacket Aqua	3.99 /Mtr.

9/125µm - OS2 SINGLEMODE Corning® SMF-28® Ultra fiber

SIMPLEX CABLE

PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
3.0mm				
S09-SX01-CZNR	Riser Yellow	900µm	TLC	18¢ /Mtr.
S09-SX01-CZNR	Riser Red	900µm	TLC	18¢ /Mtr.
S09-SX01-CZNP	Plenum Yellow	900µm	TLC	23¢ /Mtr.
1E31-311-31	Riser Yellow	900µm	CORNING	40¢ /Mtr.
2.0mm				
S09-SX01-CZNR20	Riser Yellow	900µm	TLC	18¢ /Mtr.
S09-SX01-CZNP20	Plenum Yellow	900µm	TLC	23¢ /Mtr.
S09-SX01-CZNRB20	Riser Blue	900µm	TLC	18¢ /Mtr.
1.6mm				
S09-SX01-CZNR16	Riser Yellow	650µm	TLC	18¢ /Mtr.
S09-SX01-CZNP16	Plenum Yellow	650µm	TLC	23¢ /Mtr.

DUPLEX CABLE

PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
3.0mm				
S09-DX02-CZNR	Riser Yellow	900µm	TLC	39¢ /Mtr.
S09-DX02-CZNR	Riser Red	900µm	TLC	39¢ /Mtr.
S09-DX02-CZNP	Plenum Yellow	900µm	TLC	50¢ /Mtr.
2E51-311-31	Riser Yellow	900µm	CORNING	65¢ /Mtr.
2.0mm				
S09-DX02-CZNR20	Riser Yellow	900µm	TLC	39¢ /Mtr.
S09-DX02-CZNP20	Plenum Yellow	900µm	TLC	50¢ /Mtr.
S09-DX02-CZNRB20	Riser Blue	900µm	TLC	28¢ /Mtr.
1.6mm				
S09-DX02-CZNR16	Riser Yellow	650µm	TLC	39¢ /Mtr.
S09-DX02-CZNP16	Plenum Yellow	650µm	TLC	50¢ /Mtr.

9/125µm - SINGLEMODE ULTRA LOW BEND OPTIMIZED Corning® ClearCurve® ZBL fiber (5mm Radius) G657.B3

SIMPLEX CABLE

PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
3.0mm				
S09-SX01-CCNR	Riser Yellow	900µm	TLC	35¢ /Mtr.
1.6mm				
S09-SX01-CCNR16	Riser Yellow	650µm	TLC	25¢ /Mtr.

DUPLEX CABLE

PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
3.0mm				
S09-DX02-CCNR	Riser Yellow	900µm	TLC	65¢ /Mtr.
1.6mm				
S09-DX02-CCNR16	Riser Yellow	650µm	TLC	50¢ /Mtr.

62.5/125µm - OM1 MULTIMODE Corning® ClearCurve® OM1 fiber

SIMPLEX CABLE

3.0mm PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
M62-SX01-C3NR0	Riser Orange	900µm	TLC	33¢ /Mtr.
M62-SX01-C3NP0	Plenum Orange	900µm	TLC	40¢ /Mtr.
1K31-311-41	Riser Orange	900µm	CORNING	1.05¢ /Mtr.
2.0mm				
M62-SX01-C3NR020	Riser Orange	900µm	TLC	33¢ /Mtr.
M62-SX01-C3NP020	Plenum Orange	900µm	TLC	40¢ /Mtr.
1.6mm				
M62-SX01-C3NR016	Riser Orange	650µm	TLC	33¢ /Mtr.
M62-SX01-C3NP016	Plenum Orange	650µm	TLC	40¢ /Mtr.

DUPLEX CABLE

3.0mm PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
M62-DX02-C3NR0	Riser Orange	900µm	TLC	67¢ /Mtr.
M62-DX02-C3NP0	Plenum Orange	900µm	TLC	80¢ /Mtr.
2K51-311-41	Riser Orange	900µm	CORNING	\$1.10 /Mtr.
2.0mm				
M62-DX02-C3NR020	Riser Orange	900µm	TLC	67¢ /Mtr.
M62-DX02-C3NP020	Plenum Orange	900µm	TLC	80¢ /Mtr.
1.6mm				
M62-DX02-C3NR016	Riser Orange	650µm	TLC	67¢ /Mtr.
M62-DX02-C3NP016	Plenum Orange	650µm	TLC	80¢ /Mtr.

50/125µm - OM2 MULTIMODE Corning® ClearCurve® OM2 fiber

SIMPLEX CABLE

3.0mm PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
M50-SX01-C2NR0	Riser Orange	900µm	TLC	22¢ /Mtr.
M50-SX01-C2NP0	Plenum Orange	900µm	TLC	25¢ /Mtr.
2.0mm				
M50-SX01-C2NR020	Riser Orange	900µm	TLC	22¢ /Mtr.
M50-SX01-C2NP020	Plenum Orange	900µm	TLC	25¢ /Mtr.
1.6mm				
M50-SX01-C2NR016	Riser Orange	650µm	TLC	22¢ /Mtr.
M50-SX01-C2NP016	Plenum Orange	650µm	TLC	25¢ /Mtr.

DUPLEX CABLE

3.0mm PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
M50-DX02-C2NR0	Riser Orange	900µm	TLC	47¢ /Mtr.
M50-DX02-C2NP0	Plenum Orange	900µm	TLC	68¢ /Mtr.
2.0mm				
M50-DX02-C2NR020	Riser Orange	900µm	TLC	47¢ /Mtr.
M50-DX02-C2NP020	Plenum Orange	900µm	TLC	68¢ /Mtr.
1.6mm				
M50-DX02-C2NR016	Riser Orange	650µm	TLC	47¢ /Mtr.
M50-DX02-C2NP016	Plenum Orange	650µm	TLC	68¢ /Mtr.

50/125µm - OM3 MULTIMODE-10 Gig Corning® ClearCurve® OM3 fiber

SIMPLEX CABLE

3.0mm PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
M50-SX01-CGNRA	Riser Aqua	900µm	TLC	28¢ /Mtr.
M50-SX01-CGNPA	Plenum Aqua	900µm	TLC	33¢ /Mtr.
2.0mm				
M50-SX01-CGNRA20	Riser Aqua	900µm	TLC	28¢ /Mtr.
M50-SX01-CGNPA20	Plenum Aqua	900µm	TLC	33¢ /Mtr.
1.6mm				
M50-SX01-CGNRA16	Riser Aqua	650µm	TLC	28¢ /Mtr.
M50-SX01-CGNPA16	Plenum Aqua	650µm	TLC	33¢ /Mtr.

DUPLEX CABLE

3.0mm PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
M50-DX02-CGNRA	Riser Aqua	900µm	TLC	58¢ /Mtr.
M50-DX02-CGNPA	Plenum Aqua	900µm	TLC	68¢ /Mtr.
2.0mm				
M50-DX02-CGNRA20	Riser Aqua	900µm	TLC	58¢ /Mtr.
M50-DX02-CGNPA20	Plenum Aqua	900µm	TLC	68¢ /Mtr.
1.6mm				
M50-DX02-CGNRA16	Riser Aqua	650µm	TLC	58¢ /Mtr.
M50-DX02-CGNPA16	Plenum Aqua	650µm	TLC	68¢ /Mtr.

50/125µm - OM4 MULTIMODE-10 Gig Corning® ClearCurve® OM4 fiber

SIMPLEX CABLE

3.0mm PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
M50-SX01-C4NRA	Riser Aqua	900µm	TLC	35¢ /Mtr.
M50-SX01-C4NPA	Plenum Aqua	900µm	TLC	45¢ /Mtr.
M50-SX01-C4NRM	Riser Magenta	900µm	TLC	35¢ /Mtr.
M50-SX01-C4NPM	Plenum Magenta	900µm	TLC	45¢ /Mtr.
2.0mm				
M50-SX01-C4NRA20	Riser Aqua	900µm	TLC	35¢ /Mtr.
M50-SX01-C4NPA20	Plenum Aqua	900µm	TLC	45¢ /Mtr.
M50-SX01-C4NRM20	Riser Magenta	900µm	TLC	35¢ /Mtr.
M50-SX01-C4NPM20	Plenum Magenta	900µm	TLC	45¢ /Mtr.
1.6mm				
M50-SX01-C4NRA16	Riser Aqua	650µm	TLC	35¢ /Mtr.
M50-SX01-C4NPA16	Plenum Aqua	650µm	TLC	45¢ /Mtr.
M50-SX01-C4NRM16	Riser Magenta	650µm	TLC	35¢ /Mtr.
M50-SX01-C4NPM16	Plenum Magenta	650µm	TLC	45¢ /Mtr.

DUPLEX CABLE

3.0mm PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
M50-DX02-C4NRA	Riser Aqua	900µm	TLC	60¢ /Mtr.
M50-DX02-C4NPA	Plenum Aqua	900µm	TLC	80¢ /Mtr.
M50-DX02-C4NRM	Riser Magenta	900µm	TLC	60¢ /Mtr.
M50-DX02-C4NPM	Plenum Magenta	900µm	TLC	80¢ /Mtr.
2.0mm				
M50-DX02-C4NRA20	Riser Aqua	900µm	TLC	60¢ /Mtr.
M50-DX02-C4NPA20	Plenum Aqua	900µm	TLC	80¢ /Mtr.
M50-DX02-C4NRM20	Riser Magenta	900µm	TLC	60¢ /Mtr.
M50-DX02-C4NPM20	Plenum Magenta	900µm	TLC	80¢ /Mtr.
1.6mm				
M50-DX02-C4NRA16	Riser Aqua	650µm	TLC	60¢ /Mtr.
M50-DX02-C4NPA16	Plenum Aqua	650µm	TLC	80¢ /Mtr.
M50-DX02-C4NRM16	Riser Magenta	650µm	TLC	60¢ /Mtr.
M50-DX02-C4NPM16	Plenum Magenta	650µm	TLC	80¢ /Mtr.

50/125µm - OM5 MULTIMODE-40/100 Gig Corning® ClearCurve® OM5 fiber

SIMPLEX CABLE

2.0mm PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
M50-SX01-C5NRLG20	Riser Lime Green	900µm	TLC	65¢ /Mtr.
M50-SX01-C5NPLG20	Plenum Lime Green	900µm	TLC	65¢ /Mtr.
1.6mm				
M50-SX01-C5NRLG16	Riser Lime Green	900µm	TLC	65¢ /Mtr.
M50-SX01-C5NPLG16	Plenum Lime Green	900µm	TLC	65¢ /Mtr.

DUPLEX CABLE



2.0mm PART #	DESCRIPTION	BUFFER SIZE	MFG	PRICE
M50-DX02-C5NRLG20	Riser Lime Green	900µm	TLC	\$1.15 /Mtr.
M50-DX02-C5NPLG20	Plenum Lime Green	900µm	TLC	\$1.20 /Mtr.
1.6mm				
M50-DX02-C5NRLG16	Riser Lime Green	900µm	TLC	\$1.15 /Mtr.
M50-DX02-C5NPLG16	Plenum Lime Green	900µm	TLC	\$1.22 /Mtr.

DISTRIBUTION CABLE (TIGHT BUFFERED)

TLC Distribution Cables are designed for general indoor use. Available in all fiber types, a thick durable jacket offers excellent strength and protection during installations and restorations. The 900µm color coded tight buffers allow for easy identification and termination. Cables are available in OFNR (Riser) and OFNP (Plenum) rated constructions and also a LSZH (Low Smoke Zero Halogen) jacket.

DISTRIBUTION CABLE DIAMETER CHART			
FIBER COUNT	CABLE OD	FIBER COUNT	CABLE OD
2	4.4mm	48	15.4mm
4	4.4mm	72	20mm
6	4.8mm	96	22.9mm
12	5.8mm	144	25.1mm
24	7.8mm		

plus
CORNING
Optical Fiber

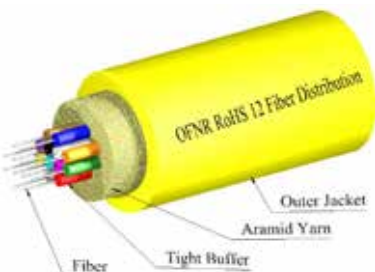

Distribution Cable - 900µm Buffered Fibers



9/125µm - OS2 SINGLEMODE Corning® SMF-28® Ultra fiber

PART #	FIBER COUNT	DESCRIPTION	MFG	PRICE	PART #	FIBER COUNT	DESCRIPTION	MFG	PRICE
S09-DI06-CZNR48	6	Riser Yellow	TLC	60¢ /Mtr.	S09-DI48-CZNR48	48	Riser Yellow	TLC	\$4.75 /Mtr.
S09-DI12-CZNR48	12	Riser Yellow	TLC	\$1.00 /Mtr.	S09-DI48-CZNP48	48	Plenum Yellow	TLC	6.75 /Mtr.
S09-DI12-CZNP48	12	Plenum Yellow	TLC	1.10 /Mtr.	S09-DI72-CZNR48	72	Riser Yellow	TLC	7.00 /Mtr.
S09-DI24-CZNR48	24	Riser Yellow	TLC	1.75 /Mtr.	S09-DI96-CZNR48	96	Riser Yellow	TLC	8.75 /Mtr.
S09-DI24-CZNP48	24	Plenum Yellow	TLC	2.00 /Mtr.	S09-DI144-CZNR48	144	Riser Yellow	TLC	10.85 /Mtr.

62.5/125µm OM1 MULTIMODE Corning® InfiniCor® 300 fiber

PART #	FIBER COUNT	DESCRIPTION	MFG	PRICE	PART #	FIBER COUNT	DESCRIPTION	MFG	PRICE
M62-DI06-C3NR048	6	Riser Orange	TLC	1.45 /Mtr.	M62-DI12-C3NR058	12	Riser Orange	TLC	\$2.85 /Mtr.
M62-DI06-C3NP048	6	Plenum Orange	TLC	1.70 /Mtr.	M62-DI12-C3NP058	12	Plenum Orange	TLC	3.05 /Mtr.
					M62-DI24-C3NR078	24	Riser Orange	TLC	5.50 /Mtr.
					M62-DI24-C3NP078	24	Plenum Orange	TLC	5.90 /Mtr.

50/125µm - OM3 MULTIMODE - 10 Gig Corning® ClearCurve® OM3 fiber

PART #	FIBER COUNT	DESCRIPTION	MFG	PRICE	PART #	FIBER COUNT	DESCRIPTION	MFG	PRICE
M50-DI02-CGNRA44	2	Riser Aqua	TLC	65¢ /Mtr.	M50-DI24-CGNRA78	24	Riser Aqua	TLC	\$4.50 /Mtr.
M50-DI02-CGNPA44	2	Plenum Aqua	TLC	75¢ /Mtr.	M50-DI24-CGNPA78	24	Plenum Aqua	TLC	4.75 /Mtr.
M50-DI04-CGNRA44	4	Riser Aqua	TLC	90¢ /Mtr.	M50-DI48-CGNRA-A	48	Riser Aqua	TLC	8.95 /Mtr.
M50-DI04-CGNPA44	4	Plenum Aqua	TLC	\$1.00 /Mtr.	M50-DI48-CGNPA-A	48	Plenum Aqua	TLC	10.95 /Mtr.
M50-DI06-CGNRA48	6	Riser Aqua	TLC	1.45 /Mtr.	M50-DI72-CGNRA-A	72	Riser Aqua	TLC	12.00 /Mtr.
M50-DI06-CGNPA48	6	Plenum Aqua	TLC	1.70 /Mtr.	M50-DI72-CGNPA-A	72	Plenum Aqua	TLC	14.75 /Mtr.
M50-DI12-CGNRA58	12	Riser Aqua	TLC	2.50 /Mtr.	M50-DI96-CGNRA-A	96	Riser Aqua	TLC	15.50 /Mtr.
M50-DI12-CGNPA58	12	Plenum Aqua	TLC	2.75 /Mtr.	M50-DI144-CGNRA-A	144	Riser Aqua	TLC	21.85 /Mtr.

50/125µm - OM4 MULTIMODE - 10 Gig Corning® ClearCurve® OM4 fiber


PART #	FIBER COUNT	DESCRIPTION	MFG	PRICE	PART #	FIBER COUNT	DESCRIPTION	MFG	PRICE
M50-DI06-C4NRA48	6	Riser Aqua	TLC	\$1.65/Mtr.	M50DI48C4NRA-A	48	Riser Aqua	TLC	\$11.50 /Mtr.
M50-DI06-C4NPA48	6	Plenum Aqua	TLC	1.80/Mtr.	M50DI48C4NPA-A	48	Plenum	TLC	13.00 /Mtr.
M50-DI12-C4NRA58	12	Riser Aqua	TLC	\$3.20/Mtr.	M50DI72C4NRA-A	72	Riser Aqua	TLC	16.65 /Mtr.
M50-DI12-C4NPA58	12	Plenum Aqua	TLC	3.35/Mtr.	M50DI72C4NPA-A	72	Plenum	TLC	19.55 /Mtr.

50/125µm - OM5 MULTIMODE - 100 Gig Corning® ClearCurve® OM5 fiber

PART #	FIBER COUNT	DESCRIPTION	MFG	PRICE	PART #	FIBER COUNT	DESCRIPTION	MFG	PRICE
M50-DI12-C5NPLG-58	12	Plenum Lime Green	TLC	\$6.25/Mtr.	M50-DI24-C5NPLG-78	24	Plenum Lime Green	TLC	\$12.35 /Mtr.

TLC MICRO-DISTRIBUTION INDOOR CABLE

FIS is proud to offer the TLC line of Micro-Distribution Cables for the Data Center market. These cables are offered in Riser, Plenum or LSZH. They are available in OS2 Singlemode, OM1 62.5µm Multimode, OM2 50µm Multimode, OM3 50µm Multimode, OM4 50µm Multimode and OM5 50µm Multimode. Numbered sub units available with either 6 or 12 fibers per tube. Micro Distribution cables with 3mm subunits available.



9/125µm - OS2 SINGLEMODE Corning® SMF-28® Ultra fiber

PART #	FIBER COUNT	DESCRIPTION	PRICE
S09-MD02-CZNPY20	2	Plenum Yellow	32¢ / Mtr.
S09-MD12-CZNPY20	12	Plenum Yellow	50¢ / Mtr.
*S09-MD24-CZNPY20-Y	24	Plenum Yellow	\$1.90 / Mtr.
*S09-MD48-CZNPY20-Y	48	Plenum Yellow	3.00 / Mtr.
*S09-MD72-CZNPY20-Y	72	Plenum Yellow	4.00 / Mtr.
*S09-MD96-CZNPY20-Y	96	Plenum Yellow	6.25 / Mtr.
*S09-MD144-CZNPY20-Y	144	Plenum Yellow	8.50 / Mtr.

*Indicates all buffers are colored Yellow

50/125µm - OM3 MULTIMODE Corning® ClearCurve® OM3 fiber

PART #	FIBER COUNT	DESCRIPTION	PRICE
M50-MD02-CGNPA20	2	Plenum Aqua	40¢ / Mtr.
M50-MD12-CGNPA20	12	Plenum Aqua	\$1.60 / Mtr.
*M50-MD24-CGNPA20-A	24	Plenum Aqua	4.00 / Mtr.
*M50-MD48-CGNPA20-A	48	Plenum Aqua	6.90 / Mtr.
*M50-MD72-CGNPA20-A	72	Plenum Aqua	10.25 / Mtr.
*M50-MD96-CGNPA20-A	96	Plenum Aqua	14.95 / Mtr.
*M50-MD144-CGNPA20-A	144	Plenum Aqua	20.95 / Mtr.

*Indicates all buffers are colored Aqua


50/125µm - OM4 MULTIMODE Corning® ClearCurve® OM4 fiber

PART #	FIBER COUNT	DESCRIPTION	PRICE
M50-MD02-C4NPA20	4	Plenum Aqua	75¢ / Mtr.
M50-MD12-C4NPA20	12	Plenum Aqua	\$2.95 / Mtr.
*M50-MD24-C4NPA20-A	24	Plenum Aqua	5.95 / Mtr.
*M50-MD48-C4NPA20-A	48	Plenum Aqua	10.95 / Mtr.
*M50-MD72-C4NPA20-A	72	Plenum Aqua	16.25 / Mtr.
*M50-MD96-C4NPA20-A	96	Plenum Aqua	19.60 / Mtr.
*M50-MD144-C4NPA20-A	144	Aqua Plenum	28.50 / Mtr.

*Indicates all buffers are colored Aqua

INDOOR/OUTDOOR CABLE

FIS offers indoor/outdoor cable in a distribution construction in both Riser and Plenum. These cables are flexible, easy to handle and simple to install. Since they do not use gel, the connectors can be terminated directly onto the 900µm fiber without breakout kits. This provides an easy and overall less expensive installation. **Note: When used in a burial application this cable must be placed in a conduit or innerduct and is not recommended for lashing applications.**

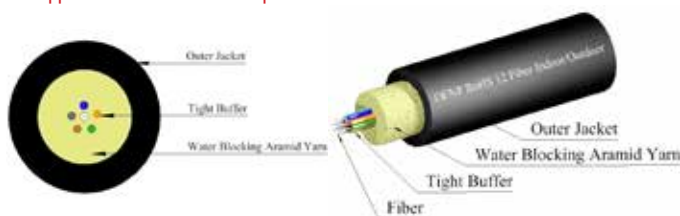

INDOOR OUTDOOR CABLE DIAMETER CHART

FIBER COUNT	CABLE OD	FIBER COUNT	CABLE OD
2	4.4mm	48	15.4mm
4	4.4mm	72	20mm
6	4.8mm	96	22.9mm
12	5.8mm	144	25.1mm
24	7.8mm		

PART #	FIBER COUNT	DESCRIPTION	PRICE
MULTIMODE 62.5/125µm Corning® InfiniCor® 300 fiber			
M62-I006-C3NRBL48	6	Riser MM 62.5/125µm - OM1	\$1.50 / Mtr.
M62-I012-C3NRBL58	12	Riser MM 62.5/125µm - OM1	3.00 / Mtr.
M62-I024-C3NRBL78	24	Riser MM 62.5/125µm - OM1	5.50 / Mtr.
M62-I002-C3NPBL44	2	Plenum MM 62.5/125µm - OM1	80¢ / Mtr.
M62-I004-C3NPBL44	4	Plenum MM 62.5/125µm - OM1	1.35 / Mtr.
M62-I006-C3NPBL48	6	Plenum MM 62.5/125µm - OM1	1.75 / Mtr.
M62-I012-C3NPBL58	12	Plenum MM 62.5/125µm - OM1	3.15 / Mtr.
M62-I024-C3NPBL78	24	Plenum MM 62.5/125µm - OM1	5.95 / Mtr.

MICRO DISTRIBUTION CABLE DIAMETER CHART

FIBER COUNT	CABLE OD	FIBER COUNT	CABLE OD
2	2mm	48	6.6mm
4	2mm	72	8mm
6	2mm	96	9.3mm
12	2mm	144	10.6mm
24	6.3mm		



See Page 100 for TLC Aluminum Interlocking Armored Distribution Cable



Micro Distribution Cable - 250µm Fibers

50/125µm - OM5 MULTIMODE Corning® ClearCurve® OM5 fiber

PART #	FIBER COUNT	DESCRIPTION	PRICE
M50-MD12-C5NPLG-20	12	Plenum Lime Green	\$5.75 / Mtr.
M50-MD24-C5NPLG-20	24	Plenum Lime Green	12.35 / Mtr.

*Indicates all buffers are colored Lime Green



Indoor / Outdoor Cable - 900µm Buffered Fibers


PART #	FIBER COUNT	DESCRIPTION	PRICE
SINGLEMODE 9/125µm Corning® SMF-28® Ultra fiber			
S09-I006-CZNRBL48	6	Riser SM 9/125µm - OS2	70¢ / Mtr.
S09-I012-CZNRBL58	12	Riser SM 9/125µm - OS2	\$1.30 / Mtr.
S09-I024-CZNRBL78	24	Riser SM 9/125µm - OS2	1.85 / Mtr.
S09-I006-CZNPBL48	6	Plenum SM 9/125µm - OS2	85¢ / Mtr.
S09-I012-CZNPBL58	12	Plenum SM 9/125µm - OS2	1.60 / Mtr.

MULTIMODE 50/125µm Corning® ClearCurve® OM3 fiber

M50-I002-CGNRBL44	2	Riser 50/125 10 Gig MM - OM3	65¢ / Mtr.
M50-I004-CGNRBL44	4	Riser 50/125 10 Gig MM - OM3	90¢ / Mtr.
M50-I006-CGNRBL48	6	Riser 50/125 10 Gig MM - OM3	\$1.45 / Mtr.
M50-I012-CGNRBL58	12	Riser 50/125 10 Gig MM - OM3	2.75 / Mtr.
M50-I024-CGNRBL78	24	Riser 50/125 10 Gig MM - OM3	4.75 / Mtr.
M50-I006-CGNPBL48	6	Plenum 50/125 10 Gig MM - OM3	1.70 / Mtr.
M50-I012-CGNPBL58	12	Plenum 50/125 10 Gig MM - OM3	3.00 / Mtr.
M50-I024-CGNPBL78	24	Plenum 50/125 10 Gig MM - OM3	4.95 / Mtr.

MULTIMODE 50/125µm Corning® ClearCurve® OM4 fiber

M50-I006-C4NRBL48	6	Riser 50/125 10 Gig MM - OM4	\$1.80 / Mtr.
M50-I006-C4NPBL48	6	Plenum 50/125 10 Gig MM - OM4	2.00 / Mtr.
M50-I012-C4NRBL58	12	Riser 50/125 10 Gig MM - OM4	3.00 / Mtr.
M50-I012-C4NPBL58	12	Plenum 50/125 10 Gig MM - OM4	3.50 / Mtr.
M50-I024-C4NRBL78	24	Riser 50/125 10 Gig MM - OM4	6.40 / Mtr.
M50-I024-C4NPBL78	24	Plenum 50/125 10 Gig MM - OM4	6.75 / Mtr.



NEW
Smaller
Diameter



900µm Buffered Fibers

Refer to page 77 for the
AIA Grounding Kit




900µm Buffered Fibers

250µm Fibers



900µm Buffered Fibers

Mini Armored Cable



250µm Fibers

Fan Out Kits
on page 103



900µm Buffered Fibers

TLC ALUMINUM INTERLOCKING ARMORED DISTRIBUTION CABLE (INDOOR)

TLC Tight Buffered Aluminum Interlocking Armored cable consists of PVC outer jacket, PVC inner jacket with 2 to 96 tight buffered fibers surrounded by aramid yarn acting as a strength member. The core is protected by a spirally wrapped aluminum strip that offers easy installation and high crush resistance. These cables are available in plenum rated constructions.

PART #	FIBER COUNT	DESCRIPTION	CABLE DIA.	PRICE
S09-DI06-CZNPY48-AIA2	6	SM Plenum 9/125µm - Yellow - OS2	13mm	\$3.25 / Mtr.
S09-DI12-CZNPY58-AIA2	12	SM Plenum 9/125µm - Yellow - OS2	14.7mm	3.95 / Mtr.
S09-DI24-CZNPY78-AIA2	24	SM Plenum 9/125µm - Yellow - OS2	16.2mm	5.65 / Mtr.
S09-DI48-CZNPY-AIA	48	SM Plenum 9/125µm - Yellow - OS2	23.50mm	12.65 / Mtr.
M50-DI06-CGNPA48-AIA2	6	MM Plenum 50/125µm Aqua - OM3	13mm	3.95 / Mtr.
M50-DI12-CGNPA58-AIA2	12	MM Plenum 50/125µm Aqua - OM3	14.7mm	5.35 / Mtr.
M50-DI24-CGNPA78-AIA2	24	MM Plenum 50/125µm Aqua - OM3	16.2mm	7.45 / Mtr.
M50-DI06-C4NPA48-AIA2	6	MM Plenum 50/125µm Aqua - OM4	13mm	4.65 / Mtr.
M50-DI12-C4NPA58-AIA2	12	MM Plenum 50/125µm Aqua - OM4	14.7mm	6.25 / Mtr.
M50-DI24-C4NPA78-AIA2	24	MM Plenum 50/125µm Aqua - OM4	16.2mm	8.95 / Mtr.

TLC ALUMINUM INTERLOCKING ARMORED DISTRIBUTION CABLE (INDOOR/OUTDOOR)

PART #	FIBER COUNT	DESCRIPTION	CABLE DIA.	PRICE
S09-I006-CZNPBL48-AIA2	6	SM Plenum 9/125µm Armored - OS2	13.0mm	\$3.25 / Mtr.
S09-I012-CZNPBL58-AIA2	12	SM Plenum 9/125µm Armored - OS2	14.7mm	3.65 / Mtr.
S09-I012-CZNPBL58-AIA2	12	SM Riser 9/125µm Armored - OS2	14.7mm	3.25 / Mtr.
M50-I006-CGNPBL48-AIA2	6	MM Plenum 50/125µm 10 Gig Armored - OM3	13.0mm	3.95 / Mtr.
M50-I012-CGNPBL58-AIA2	12	MM Plenum 50/125µm 10 Gig Armored - OM3	14.7mm	5.35 / Mtr.
M50-I024-CGNPBL78-AIA2	24	MM Plenum 50/125µm 10 Gig Armored - OM3	16.2mm	6.95 / Mtr.

TLC ALUMINUM INTERLOCKING ARMORED MICRO DISTRIBUTION CABLE (INDOOR)

PART #	FIBER COUNT	DESCRIPTION	CABLE DIA.	PRICE
S09-MD12-CZNPY-AIA2	12	SM Plenum Yellow Armored - OS2	14.7mm	\$2.95 / Mtr.
M50-MD12-CGNPA-AIA2	12	MM Plenum Aqua Armored - OM3	14.7mm	4.35 / Mtr.
M50-MD24-CGNPAATW-AIA2	24	MM Plenum Aqua Armored - OM3	16.2mm	7.00 / Mtr.
M50-MD48-CGNPA4TA-AIA2	48	MM Plenum Aqua Armored - OM3	17.45mm	12.45 / Mtr.
M50-MD12-C4NPA-AIA2	12	MM Plenum Aqua Armored - OM4	14.7mm	5.65 / Mtr.
M50-MD24-C4NPAATW-AIA2	24	MM Plenum Aqua Armored - OM4	16.2mm	9.75 / Mtr.
M50-MD48-C4NPA4TA-AIA2	48	MM Plenum Aqua Armored - OM4	17.45mm	14.35 / Mtr.

FIS MINI ARMORED CABLE

Mini Armored Cable is compact for use in data centers, broadcast or distributed antenna systems (DAS) where crowded cable tray or exposed environment is additional protected with strength spiraled armoring surrounding internal jacketed cable. Double protection much improved flexibility over traditional interlocking armored fiber cable. With outer diameter of 7.5mm it is available with Low Smoke Zero Halogen (LSZH) jacket for indoor applications or Polyurethane (PU) jacket for outdoor or rugged areas.

PART #	FIBER COUNT	DESCRIPTION	PRICE
S09-MA-06-SM-PUBL75	6	Mini Armored Fiber Cable, Singlemode G657A2, Polyurethane Jacketed, color black 7.5mm OD	\$2.00 / Mtr.
S09-MA-12-SM-PUBL75	12	Mini Armored Fiber Cable, Singlemode G657A2, Polyurethane Jacketed, color black 7.5mm OD	2.50 / Mtr.
S09-MA-06-SM-LZBL75	6	Mini Armored Fiber Cable, Singlemode G657A2, LSZH Jacketed, color black 7.5mm OD	1.50 / Mtr.
S09-MA-12-SM-LZBL75	12	Mini Armored Fiber Cable, Singlemode G657A2, LSZH Jacketed, color black 7.5mm OD	2.50 / Mtr.
M50-MA-06-OM3-LZBL75	6	Mini Armored Fiber Cable, Multimode 50/125µm OM3, LSZH Jacketed, color black 7.5mm OD	2.50 / Mtr.
M50-MA-12-OM3-LZBL75	12	Mini Armored Fiber Cable, Multimode 50/125µm OM3, LSZH Jacketed, color black 7.5mm OD	3.35 / Mtr.

TLC GEL FREE CABLE (INDOOR/OUTDOOR) 250µm BUFFERED FIBERS

This cable has no gel fill to complicate the connectorization process. Instead, water swellable yarn replaces the gel. Each tube contains colored bare fibers, making your installation simple and fast. Fiber counts 2-12 are in one subunit and larger counts are in subunits of 12.

PART #	FIBER COUNT	DESCRIPTION	PRICE
S09-DL06-CZNRBL25	6	SM 9/125µm Riser PVC Black - OS2	85¢ / Mtr.
S09-DL12-CZNRBL25	12	SM 9/125µm Riser PVC Black - OS2	.95¢ / Mtr.
S09-DL24-CZNRBL25	24	SM 9/125µm Riser PVC Black - OS2	\$2.00 / Mtr.
S09-DL48-CZNRBL25	48	SM 9/125µm Riser PVC Black - OS2	2.45 / Mtr.
S09-DL72-CZNRBL25	72	SM 9/125µm Riser PVC Black - OS2	3.70 / Mtr.
S09-DL96-CZNRBL25	96	SM 9/125µm Riser PVC Black - OS2	4.75 / Mtr.
S09-DL144-CZNRBL25	144	SM 9/125µm Riser PVC Black - OS2	5.70 / Mtr.
M50-DL06-CGNRBL25	6	MM 50/125µm Riser PVC Black - OM3	1.65 / Mtr.
M50-DL12-CGNRBL25	12	MM 50/125µm Riser PVC Black - OM3	2.50 / Mtr.
M50-DL12-C4NRBL25	12	MM 50/125µm Riser PVC Black - OM4	3.45 / Mtr.
M50-DL24-C4NPBL25	24	MM 50/125µm Plenum PVC Black - OM4	6.75 / Mtr.

FIS BLUE TACTICAL CABLE

FIS Blue fiber optic tactical cable consists of a rugged, flexible polyurethane outer jacket and up to twelve 900µm tight-buffered fibers surrounded by aramid yarn and an aramid ripcord. The jacket is pressure extruded over the strength member which allows the pulling device to be attached directly to the cable's outer jacket. This will transfer the pulling force directly to the strength members with no slippage.

PART #	FIBER COUNT	DESCRIPTION	PRICE
FB-SM6-TACCABLE	6	SM 9/125µm Tactical Cable - OS2	\$2.00 / Mtr.
FB-SM-TACCABLE-12	12	SM 9/125µm Tactical Cable - OS2	3.25 / Mtr.
FB-OM4-TACCABLE-6	6	MM 50/125µm Tactical Cable - OM4	4.75 / Mtr.
FB-OM4-TACCABLE-12	12	MM 50/125µm Tactical Cable - OM4	9.45 / Mtr.

FIS FLAT DROP CABLE

FIS offers the flat stranded single tube drop cable for Fiber To The Home applications. This durable design incorporates two dielectric rigid rods for optimal tensile strength and crush protection.

PART #	FIBER COUNT	DESCRIPTION	PRICE
S09FD02CZEBL	2	Fiber SM Corning® SMF-28® Ultra fiber Dry Flat Drop Cable PE Black, 250µm Fiber	55¢ /Mtr.
S09FD02CZEBLG	2	Fiber SM Corning® SMF-28® Ultra fiber Gel Flat Drop Cable PE Black, 250µm Fiber	55¢ /Mtr.
S09FD02CZEBLG24G	2	Fiber SM Corning® SMF-28® Ultra fiber Gel Flat Drop Toneable (24 AWG) Cable, 250µm Fiber	60¢ /Mtr.
S09FDB02CZEBL	2	900µm Buffer SM Corning® SMF-28® Ultra fiber Dry Flat Drop PE Black	60¢ /Mtr.
S09FDB02CZEBLG24AWG	2	900µm Buffer SM Corning® SMF-28® Ultra fiber Dry Flat Drop Toneable 24 AWG	60¢ /Mtr.
S09FD04CZEBL	4	Fiber SM Corning® SMF-28® Ultra fiber Dry Flat Drop Cable PE Black, 250µm Fiber	60¢ /Mtr.
S09FD06CZEBL	6	Fiber SM Corning® SMF-28® Ultra fiber Dry Flat Drop Cable PE Black, 250µm Fiber	60¢ /Mtr.
S09FD12CZEBL	12	Fiber SM Corning® SMF-28® Ultra fiber Flat Drop Cable PE Black, 250µm Fiber	70¢ /Mtr.
S09FD12CZEBLT	12	Fiber SM Drop Cable Dry Toneable (24 AWG) PE Black, 250µm Fiber	70¢ /Mtr.

FIS MICRO FLAT DROP CABLE

The design of the cable provides fast simplified removal of the jacket, 55 percent faster than standard flat drop cable. Cable can be utilized in the field and factory for installation of connectors. The dielectric version eliminates any bonding and grounding requirements. Available with 1 or 2 fibers. Dielectric strength member (2) 1.5mm EAA coated FRP. Cable diameter 3.0mm x 5.4mm singlemode fiber G.657A1.

PART #	FIBER COUNT	DESCRIPTION	CABLE DIA.	PRICE
S09MDC901CZEBL	1	Micro Flat Drop Cable (250µm Fiber)	3.4mm x 5.4mm	\$0.55 /Mtr.

CORNING® OPTICAL COMMUNICATION DROP CABLES

SST-Drop™ Cables offer the ease of installation of standard ALTOS® cable in an easy-access stranded single-tube (SST) design. Intended for FTTH networks, bridging the space between distribution network and subscriber premise.

PART #	FIBER COUNT	DESCRIPTION	PRICE
001-EB4-14101A20	1	SM 9/125µm SST Drop™ Cable - OS2	80¢ /Mtr.
002-EB4-14101A20	2	SM 9/125µm SST Drop™ Cable - OS2	80¢ /Mtr.
012-EB4-14101A20	12	SM 9/125µm SST Drop™ Cable - OS2	\$1.15 /Mtr.

FIS PEELABLE STEEL ARMORED CABLE

FIS Peelable Steel Armored Cable offers reliable, high-density performance for campus backbones in direct-buried installations. The single-armored design provides extra crush and rodent protection, while gel-free materials ensure water-blocking with no cleanup required. Flexible buffer tubes are easy to route in closures, and the SZ-stranded, loose tube design isolates fibers from installation and environmental rigors while allowing simplify installation and mid-span access.

PART #	FIBER COUNT	DESCRIPTION	PRICE
S09OSP48NPEBL-ST	48	OSP Peelable Steel Tape Armored G657A1	69¢ /per Ft.
S09OSP96NPEBL-ST	96	OSP Peelable Steel Tape Armored G657A1	\$1.12 /per Ft.
S09OSP144NPEBL-ST	144	OSP Peelable Steel Tape Armored G657A1	1.66 /per Ft.

BELDEN ARMORED CENTRAL LOOSE TUBE CABLE (OUTDOOR AERIAL / BURIAL)

Belden Armored Central Tube OSP cable offers rodent protection and direct burial for outdoor applications. Cable features: surrounded by gel for moisture resistance, corrugated steel tape and a polyethylene jacket for weather and UV protection.

PART #	FIBER COUNT	DESCRIPTION	CABLE DIA.	PRICE
FSSC00660	6	SM 9/125µm - OS2	13.5mm	\$2.50 /Mtr.
FSSC01260	12	SM 9/125µm - OS2	13.5mm	2.65 /Mtr.
FS1C00660	6	MM 62.5/125µm - OM1	13.5mm	4.95 /Mtr.
FS1C01260	12	MM 62.5/125µm - OM1	13.5mm	5.75 /Mtr.
FS3C00660	6	MM 50/125µm - OM3	13.5mm	4.95 /Mtr.
FS3C01260	12	MM 50/125µm - OM3	13.5mm	5.50 /Mtr.

BELDEN CENTRAL LOOSE TUBE OSP CABLE

Belden Central Loose Tube OSP cable features the long-term, field-proven reliability of conventional polyethylene outdoor unitized construction surrounded by gel for moisture resistance. Recommended applications include building interconnections and data trunk, long haul networking and applications requiring good ozone, moisture and weather resistance. Other fiber counts and types available.

PART #	FIBER COUNT	DESCRIPTION	CABLE DIA.	PRICE
FSSC006N0	6	SM 9/125µm - OS2	8.26mm	\$1.60 /Mtr.
FSSC012N0	12	SM 9/125µm - OS2	8.26mm	1.75 /Mtr.
FS1C006N0	6	MM 62.5/125µm - OM1	8.26mm	4.25 /Mtr.
FS1C012N0	12	MM 62.5/125µm - OM1	8.26mm	4.95 /Mtr.
FS3C006N0	6	MM 50/125µm - OM3	8.26mm	4.30 /Mtr.
FS3C012N0	12	MM 50/125µm - OM3	9.65mm	4.95 /Mtr.

AFL MINI-SPAN® ADSS CABLE

AFL Mini-Span® All-Dielectric Self-Supporting (ADSS) cable is designed for outside plant aerial and duct applications in local and campus network loop architectures. A separate messenger support wire hanging system is not required. Mini-Span® single-mode and laser-optimized multimode fibers are available. (Minimum order quantities may be required)


PART #	FIBER COUNT	DESCRIPTION	PRICE
AE0129C520AA4	12	SM Mini-Span® 424 - OS2	\$2.25 /Mtr.
AE0249C520AA4	24	SM Mini-Span® 424 - OS2	2.60 /Mtr.
AE0489C520AA4	48	SM Mini-Span® 424 - OS2	3.25 /Mtr.
AE0729C820EA7	72	SM Mini-Span® 535 - OS2	5.00 /Mtr.



S09FD02CZEBLG




S09MDC901CZEBL



Peelable Steel Armored Cable
250µm Fibers



250µm Fibers



250µm Fibers



250µm Fibers

FIS now offers OPGW cable from AFL.
Ask your sales associate for details.

CABLE | FURCATION TUBE

The TLC 2mm, 3mm, 3.8mm, and 4.8mm furcation tubing consists of an inner tube surrounded by aramid yarn and an overall PVC jacket. Twelve standard colors are available. Inner tubes are available in specific sizes to accept either bare or buffered fibers.

TLC's 900 micron furcation tubing is a single tube designed specifically for the protection and termination of 250µm bare fiber. Twelve standard colors in Hytrel® as well as clear PVC are available.

900µm FURCATION TUBE

PART #	DESCRIPTION	PRICE
F00-FR900R-CLEAR	Clear (PVC) (Accepts 250µm Bare Fiber)	50¢ /Mtr.
F00-FR900-HN	Opaque (Accepts 250µm Bare Fiber)	50¢ /Mtr.
F00-FR900-HW	White (Accepts 250µm Bare Fiber)	50¢ /Mtr.
F00-FR900-HY	Yellow (Accepts 250µm Bare Fiber)	50¢ /Mtr.
F00-FR900-HO	Orange (Accepts 250µm Bare Fiber)	50¢ /Mtr.
F00-FR900-HA	Aqua (Accepts 250µm Bare Fiber)	50¢ /Mtr.

2.0mm FURCATION TUBE

Our 2.0mm furcation tubing has an inner tube surrounded by aramid fibers. The inner tube accepts 250µm bare fiber and 900µm tight buffered (1.5mm OD inner tube for 900µm) fiber. Other colors available.

PART #	DESCRIPTION	PRICE
F00-FR2NUO-900-PLM	Orange (Accepts 250µm Bare Fiber)	50¢ /Mtr.
F00-FR2NUY-900-PLM	Yellow (Accepts 250µm Bare Fiber)	50¢ /Mtr.
F00-FR2NUA-900-PLM	Aqua (Accepts 250µm Bare Fiber)	50¢ /Mtr.
F00-FR2-NUO-PLM	Orange (Accepts 900µm Tight Buffer)	50¢ /Mtr.
F00-FR2-NUY-PLM	Yellow (Accepts 900µm Tight Buffer)	50¢ /Mtr.
F00-FR2-NUR-PLM	Red (Accepts 900µm Tight Buffer)	50¢ /Mtr.
F00-FR2-NUB-PLM	Blue (Accepts 900µm Tight Buffer)	50¢ /Mtr.
F00-FR2-NUG-PLM	Green (Accepts 900µm Tight Buffer)	50¢ /Mtr.
F00-FR2-NUA-PLM	Aqua (Accepts 900µm Tight Buffer)	50¢ /Mtr.

3.0mm FURCATION TUBE

Our 3.0mm furcation tube that accepts 900µm has an inner tube with a Pull String. The 900µm inner hollow tube, the same tube found in FIS Universal Breakout Kits, may now be purchased separately. Includes aramid yarn strength member. Other colors available. (PS) Indicates Pull String.

PART #	DESCRIPTION	PRICE
F00-FR3NUO-900-PLM	Orange (Accepts 250µm Bare Fiber)	50¢ /Mtr.
F00-FR3NUY-900-PLM	Yellow (Accepts 250µm Bare Fiber)	50¢ /Mtr.
F00-FR3NUA-900-PLM	Aqua (Accepts 250µm Bare Fiber)	50¢ /Mtr.
F00-FR3-NUO-PLM (PS)	Orange (Accepts 900µm Tight Buffer)	50¢ /Mtr.
F00-FR3-NUY-PLM (PS)	Yellow (Accepts 900µm Tight Buffer)	50¢ /Mtr.
F00-FR3-NUR-PLM (PS)	Red (Accepts 900µm Tight Buffer)	50¢ /Mtr.
F00-FR3-NUB-PLM (PS)	Blue (Accepts 900µm Tight Buffer)	50¢ /Mtr.
F00-FR3-NUG-PLM (PS)	Green (Accepts 900µm Tight Buffer)	50¢ /Mtr.
F00-FR3-NUA-PLM (PS)	Aqua (Accepts 900µm Tight Buffer)	50¢ /Mtr.

DUPLEX FURCATION TUBE

TLC 2.0mm and 3.0mm duplex furcation tubing consists of an inner tube surrounded by aramid fibers, and a PVC jacket sized for the industry standard connectors. The duplex design allows for professional termination of connector pairs. (PS) Indicates Pull String.

2.0mm

PART #	DESCRIPTION	PRICE
F00-FDX2-NUO-PLM	Orange (Accepts 900µm Tight Buffer)	75¢ /Mtr.
F00-FDX2-NUY-PLM	Yellow (Accepts 900µm Tight Buffer)	75¢ /Mtr.
F00-FDX2-NUA-PLM	Aqua (Accepts 900µm Tight Buffer)	75¢ /Mtr.

3.0mm

F00-FDX3-NUO-PLM (PS)	Orange (Accepts 900µm Tight Buffer)	75¢ /Mtr.
F00-FDX3-NUY-PLM (PS)	Yellow (Accepts 900µm Tight Buffer)	75¢ /Mtr.
F00-FDX3-NUG-PLM (PS)	Green (Accepts 900µm Tight Buffer)	75¢ /Mtr.
F00-FDX3-NUA-PLM (PS)	Aqua (Accepts 900µm Tight Buffer)	75¢ /Mtr.

RIBBON FURCATION TUBE

FIS offers ribbon furcation tubing for protection of bare ribbon fibers. Standard size fits fiber counts of 4, 6, 8 and 12 fibers. There is no inner tube or strength member.

PART #	DESCRIPTION	PRICE
F00-FRRB-NRO	Orange	75¢ /Mtr.
F00-FRRB-NRY	Yellow	75¢ /Mtr.
F00-FRRB-NRA	Aqua	75¢ /Mtr.



ROSIN BAG

FIS technicians utilize rosin bags to ease the application of furcation tubing and help remove flooding gels while stripping. The rosin bags are used to dry wet surfaces making furcation quicker and easier.


PART #	DESCRIPTION	PRICE
F1-9795-3	Rosin Bags 3/pack	\$7.95



Spiral Wrap

SPIRAL WRAP

PART #	DESCRIPTION	PRICE
HT316N	Nylon Spiral Cut Tubing 3/16"	\$2.25/mtr

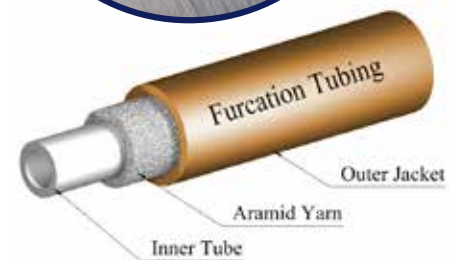

FEATURES

- Accepts either bare fiber or tight buffer
- Provides durable protection when breaking out cables
- Newly engineered outer jacket protects against crushing and kinking
- Designed for all connector types
- 12 standard colors
- Also available with pull string for 2mm and 3mm furcation tubing

APPLICATIONS

- Building up or breaking out of cables for termination
- Protection of bare fiber or tight buffer
- Color coded for easy identification

FIS COLOR CODED BUFFER TUBE/RIBBON FAN-OUT KITS

FIS Fan-Out Kits are designed for a simple and easy breakout from standard Buffer Tubes or Ribbon Cables. The kits are pre-configured for 4, 6 and 12 fiber applications with 25" and 36" lengths of 900µm Hytrel tubing in the appropriate industry-standard color code. FIS Fan-Out Kits have a unique snap-together design that offers the ability to unsnap the unit for reentry if necessary. Each kit comes with the adapters that accommodate round cable configurations, such as Buffer Tubes, and Ribbon Cables. This cost-saving feature allows you to cover your application possibilities with just one style.

PART #	DESCRIPTION	PRICE
F1-BF0425M	4 Fiber (25" Tubing) Accepts 250µm	\$10.50
F1-BF0625M	6 Fiber (25" Tubing) Accepts 250µm	12.85
F1-BF1225M	12 Fiber (25" Tubing) Accepts 250µm	19.50
F1-BF0436M	4 Fiber (36" Tubing) Accepts 250µm	10.90
F1-BF0636M	6 Fiber (36" Tubing) Accepts 250µm	14.25
F1-BF1236M	12 Fiber (36" Tubing) Accepts 250µm	22.50

FIS COLOR CODED BREAKOUT KITS (Custom Colors Available.)

The FIS 2mm and 3mm Breakout Kits are designed for the quick and simple termination of distribution cables. Color coded tubing eliminates the need for marking individual fiber ends, as your cable will be color coded to TIA/EIA standards.

PART #	DESCRIPTION	PRICE
F1-BOK0640-20M	2mm, 6 Fiber (40" Tubing) Accepts 900µm	\$20.75
F1-BOK1240-20M	2mm, 12 Fiber (40" Tubing) Accepts 900µm	35.30
F1-BOK0640MA	2mm, 6 Fiber (40" Tubing) Accepts 900µm - Aqua (numbered instead of color coded)	17.50
F1-BOK1240MA	2mm, 12 Fiber (40" Tubing) Accepts 900µm - Aqua (numbered instead of color coded)	28.50
F1-BOK0640M	3mm, 6 Fiber (40" Tubing) Accepts 900µm	27.00
F1-BOK1240M	3mm, 12 Fiber (40" Tubing) Accepts 900µm	31.50
F1-BOK0640M250	3mm, 6 Fiber Colored Coded, Accepts 250µm	27.00
F1-BOK1240M250	3mm 12 Fiber Colored Coded, Accepts 250µm	31.50

FIS COLOR CODED BUFFER TUBE/RIBBON FAN-OUT KITS (24 Fiber)

FIS Fan-Out Kits are designed for a simple and easy breakout from standard Buffer Tubes or Ribbon Cables. The kits are pre-configured for 24 fiber applications with 25" and 36" lengths of 900µm Hytrel tubing in the appropriate industry standard color code. (4 Fiber, 6 Fiber and 12 Fiber Kits are also available) FIS Fan-Out Kits have a unique snap together design that offers the ability to unsnap the unit for re-entry if necessary. Each kit comes with the adapters that accommodate round cable configurations, such as Buffer Tubes, and Ribbon Cables. This cost saving feature allows you to cover your application possibilities with just one style breakout kit.

PART #	DESCRIPTION	PRICE
F1-BF2425M	24 Fiber (25" Tubing) Accepts 250µm	\$18.95
F1-BF2436M	24 Fiber (36" Tubing) Accepts 250µm	22.25

CORNING® BUFFER TUBE FAN-OUT KITS

Ideal for indoor or outdoor crossconnects, these kits provide the most compact, easy-to install fan-out solution. The compact design requires no additional hardware. The 900µm fan-out assembly is color coded to match the fiber color scheme and is available in 6- or 12-fiber units in lengths of 25, 36 or 47 inches.

PART #	DESCRIPTION	PRICE
FAN-BT25-06	6 Fiber (25" Tubing)	\$16.25
FAN-BT36-06	6 Fiber (36" Tubing)	16.25
FAN-BT25-12	12 Fiber (25" Tubing)	17.99
FAN-BT36-12	12 Fiber (36" Tubing)	17.99

CORNING® SPIDER FAN-OUT KITS


Corning® Spider Fan-Out Kits are designed for both factory and field terminations of distribution or loose tube cables from 4 to 24 fibers. The fan-out tubing provides three layers of protection consisting of a Teflon inner tube, a dielectric strength member and an outer protective PVC jacket.

PART #	DESCRIPTION	PRICE
SFK-P06-250M	6 Fiber accepts 250µm (Orange)	\$37.25
SFK-P12-250M	12 Fiber accepts 250µm (Orange)	51.95
SFK-P24-250M	24 Fiber accepts 250µm (Orange)	97.00
SFK-P06-250S	6 Fiber accepts 250µm (Yellow)	37.25
SFK-P12-250S	12 Fiber accepts 250µm (Yellow)	57.95
SFK-P24-250S	24 Fiber accepts 250µm (Yellow)	80.75
SFK-P06-900M	6 Fiber accepts 900µm (Orange)	35.00
SFK-P06-900S	6 Fiber accepts 900µm (Yellow)	35.00

CORNING® RIBBON FAN-OUT KITS

Corning® Cable Systems' Ribbon Fan-Out Kits are specifically designed for the termination of 12-fiber ribbon. Kits feature a 900µm fan-out assembly that is color-coded to match the industry-standard color code.

PART #	DESCRIPTION	PRICE
RIB-FAN-1225	12 Ribbon Fiber (25" Tubing)	\$15.35
RIB-FAN-1236	12 Ribbon Fiber Fan-Out kit (36" Tubing)	17.50

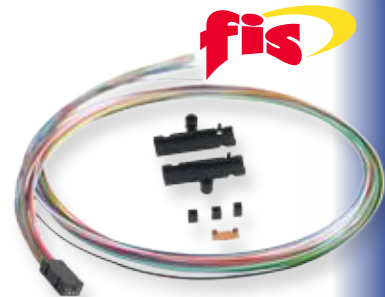

CORNING



CORNING



CORNING





F1-1007S

CANNED AIR

Before removing a fiber optic connector for inspection or cleaning, make sure the area around the connector is free from dust. The FIS Micro Duster includes an extension nozzle to provide a powerful blast of air to remove particles from areas that are otherwise inaccessible. Competitively priced. **Shipping restrictions and fees may apply.**

PART #	DESCRIPTION	PRICE
F1-1007S	FIS Canned Air (10oz.)	\$16.45



F1-8328C



F1-8327

F1-8326

FIBER OPTIC DISPOSAL UNIT

A handy and safe solution for disposing of cleaved fiber ends. Perfect for on-site installers. Choose from three sizes to accommodate any tool kit and splice/connector station. The large unit has a snap on hinge cover, while the standard and mini containers have traditional slide tops for easy opening and closing.

PART #	DESCRIPTION	PRICE
F1-8328C	Large Fiber Optic Disposal Unit with Snap Top (3 1/2" W x 5 1/2" H)	\$6.25
F1-8327	Standard Fiber Optic Disposal Unit with Slide Top (1 7/8" W x 4 3/8" H)	4.25
F1-8326	Mini Fiber Optic Disposal Unit with Slide Top (1 5/8" W x 1 1/2" H)	3.25



F1-007PL



F1-007P

FIS DISPENSING BOTTLE

PART #	DESCRIPTION	PRICE
F1-007PL	8 oz. Automatic Alcohol Dispensing Bottle (Plastic)	\$6.95
F1-007P	8 oz. Automatic Alcohol Dispensing Bottle (Amber Glass)	7.95



F1-8265



F1-0001V

PIANO WIRE

A smart way to save a connector when a fiber breaks inside a ferrule during connectorization. Also an excellent tool to remove broken fiber from bare fiber adapters. Sticky colored tabs provided to hold wire.

PART #	DESCRIPTION	PRICE
F1-8265	FIS Piano Wire (8 wires /10 dots)	\$4.95

MATCHING GEL (OPTICAL COUPLANT)

To reduce optical loss within fiber optic mechanical splices and connectors, apply optical couplant at the interface of the two mated fibers. This minimizes loss by reducing the difference in the index of refraction between the mated fibers.

PART #	DESCRIPTION	PRICE
F1-0001V	FIS Matching Gel (.4oz)	\$26.95



9006

OPTICAL COUPLANT LIQUID

To reduce optical loss within fiber optic mechanical splices and connectors, apply optical couplant at the interface of the two mated fibers. This minimizes loss by reducing the difference in the index of refraction between the mated fibers. Available as liquid.

PART #	DESCRIPTION	PRICE
9006	Liquid Matching Couplant (.2 oz., Syringe)	\$17.95



CHEMTRONICS QBE® SERIES

QbE® Cleaning Platforms offer a more complete removal of microscopic contaminants, without the chance of damage to the optical fiber end face. Self-contained cleaning tools that can be used dry or wet, they are convenient and economical for use in field or OEM applications.

PART #	DESCRIPTION	PRICE
QBE	QBE® Lint Free Cleaning Wipes, 200 Perforated Wipes 2.75" x 3"	\$36.95
PQBE	Pocket QBE® Lint Free Cleaning Wipes, 200 Perforated Wipes 1.375" x 3"	56.25
QBE-R	QBE® Lint Free Cleaning Wipes for APC & MTP Recessed Connectors 200 Wipes 2.75" x 3"	52.95



WCS800

WCS100



WFW

STICKLERS CLEANING WIPES AND BOX

Perfectly packaged for factories making jumpers and patch cords, this tool is designed for high-speed, high-volume production. Featuring a high-modulus fabric that will not lint, tear, or shred and allows for 3,200+ cleanings per roll for the large box and 600+ cleanings per roll for the small box.

PART #	DESCRIPTION	PRICE
WCS800	Sticklers Large Cleaning Box (3,200+ Cleanings)	\$45.50
WCS100	Sticklers Small Cleaning Box (600+ Cleanings)	20.00
WFW	CleanWipes™ (90 wipes)	13.50

FIS FIBER OPTIC WIPES

The FIS low lint tissues can be used dry or with cleaning solvents to clean ferrule endfaces or prepare fibers for termination and/or splicing.

PART #	DESCRIPTION	PRICE
F1-6705	Low Lint Wipes (280 wipes per box)	\$2.50

F1-6705



Great Price

FIS FIBER OPTIC 4"x4" NON-WOVEN WIPES

Non-Woven cloth wipes can be used alone or with alcohol or solvents. Provides superior cleaning of fiber optic connector ferrules without risk of scratching or lint residue.

PART #	DESCRIPTION	PRICE
F1-6702	Non-Woven Dry Wipes, 100 per pack, 4" x 4"	\$3.95
F1-6704	Non-Woven Dry Wipes, 1,200 per pack, 4" x 4"	32.95



F1-6702

KIMWIPES

Kim Wipes are the standard for use alone or with alcohol or solvents. Kim Wipes provide superior cleaning of fiber optic connector ferrules without risk of scratching. 286 wipes per box.

PART #	DESCRIPTION	PRICE
34-155	Individual box (4.4" x 8.2")	\$2.95
34-155C	Case (60 per case)	175.00
34-256C	Large Sheet Kim Wipes - 15 Boxes per case (14.7" x 16.6")	150.00

34-155



ISOPROPYL ALCOHOL PRODUCTS

This 99% ACS reagent grade isopropyl is used in cleaning fiber, connector end faces or prior to splicing. Also offered are dispensing bottles available in glass or plastic. **Ground shipping only. Hazmat fees may apply.**

PART #	DESCRIPTION	PRICE
F1-0068	1 Case of (6) 4 oz. Canned Alcohol	\$40.95
F1-0007SP	4 oz. Alcohol Bottle with Spray Top	3.95
F1-0007	1 Case of (6) 4 oz. Alcohol Squeeze Bottles	17.95
F1-000728	Bottled Alcohol (28 oz.)	9.50
F1-1007GA	1 Case Alcohol (4 gallons per case)	165.00



HAZMAT FEES
MAY APPLY
GALLON ONLY



GROUND
SHIPPING
REQUIRED



F1-0068



F1-0007

F1-000728

FIBER OPTIC CLEANING SOLUTION

This fast-acting cleaner can be used with dry fiber wipes or tissues to remove dirt and soils from optical fibers prior to termination and splicing or to clean the end of connector ferrules.

PART #	DESCRIPTION	PRICE
F1-6706AQ	Water-based Fiber Optic Cleaner (2 oz.)	\$11.95

Air Ship
Available

FIBER OPTIC SPLICE AND CONNECTOR CLEANER

Ideal for cleaning ferrules in connector bulkheads as well as individual fiber optic connectors. This fast-drying, optical-grade cleaning fluid can be used with wipes or cleaning sticks for wet/dry cleaning without chemical residue. Three-way dispenser enables you to select spray mode, dampening mode or wetting mode. Travel safe, non-flammable, non-regulated, and non-hazardous. No hazmat fees!

PART #	DESCRIPTION	PRICE
POC03M	Sticklers Splice and Connector Cleaner (3oz.)	\$16.95

Air Ship
Available

F1-6706



POC03M

ITW CHEMTRONICS CLEANING SOLUTIONS

PART #	DESCRIPTION	PRICE
F1-ES810	Electro-Wash® 5 oz. Aerosol Can (PX) (Ground shipping required)	\$15.00
F1-ES110	Electro-Wash® 1 Gallon Bottle (PX) (Ground shipping required)	91.25
F1-ES1210	Electro-Wash® 12.5 oz. Aerosol Can (PX) (Ground shipping required)	30.25
F1-ES1607	Electro-Wash® 12 oz. Aerosol Can (NXO) (Ground shipping required) (Pictured)	76.50
F1-MXCP	Electro-Wash® MX Cleaning Pen (Pictured)	9.35

F1-ES1607



F1-MXCP



STICKLERS™ PRO360° TOUCHLESS CLEANER

The Sticklers™ Pro360° Touchless Cleaner is the future of high-performance fiber optic end face cleaning. Unlike anything else in the industry, this groundbreaking end face connector cleaning tool stands out for its ability to quickly and completely clean oils and dust across the entire end face of both male and female connector ends, with just the press of the connector cleaner handset.

PART #	DESCRIPTION	PRICE
MCC-P360	Sticklers Pro360 Touchless Connector Cleaner (Tool, Fluid Canister, 1.25mm and 2.5mm tips)	\$1,950.00
MCC-P360FK	PRO360 Field Kit: Water Resistant Hard Protective Case for PRO360, Fiber Optic Splice & Connector Cleaning Fluid, Sticklers Cleanwipes (90/tub), Sticklers CleanStixx, 1.25mm (1 Sleeve of 10), Sticklers CleanStixx, 2.5mm (1 Sleeve of 10)	215.00
MCC-P360SOL	Sticklers Pro360 Fiber Optic Fluid Canister (2000 cleans)	\$70.00





F1-1004

PRE-MOISTENED ALCOHOL WIPES

Fast evaporating alcohol pre-moistened wipes can be used on optical fiber to remove dirt, dust and oils. Contains: Isopropanol.

PART #	DESCRIPTION	PRICE
F1-1004	FIS Pre-Moistened Alcohol Wipes, 4"x6" wipe size (50 pk.)	\$11.50



F0-1

POLYWATER ANHYDROUS ALCOHOL

Type FO™ is great for cleaning glass fiber, connector end faces or prior to splicing. Type FO™ quickly removes dust, oils, and contaminants, while leaving no residue. The anhydrous alcohol in FO™ has essentially no water content. The towels are durable and non-linting. The package limits vapor exposure and eliminates spill hazards. **Hazmat fees may apply.**

PART #	DESCRIPTION	PRICE
F0-1	Type FO™ Alcohol Prep Wipe, 7.5"x12" wipe size (50 pk.)	\$35.00
F0-16	Type FO™ 16-oz Alcohol Fiber Cleaner - Hazmat fees may apply.	12.50



HAZMAT FEES
MAY APPLY



F1-1010

PRE-MOISTENED DEGREASER WIPES (ICKY-PIC CLEANER)

FIS Icky-Clean wipes can be used with outside plant, optical or copper cables. Utilize to remove Icky-Pic or gels from cables prior to splicing or termination. Great to clean up tools as well.

PART #	DESCRIPTION	PRICE
F1-1010	FIS Pre-Moistened Degreaser Wipes, 5"x8" wipe size (12 pk.)	\$10.95
F1-1010-100	FIS Pre-Moistened Degreaser Wipes, 5"x8" wipe size (100 pk.)	72.00



F1-TC1

POLYWATER SQUEEKYKLEEN™ (ICKY-PIC CLEANER)

SqueekyKleen™ cleans and fans fiber in two wipes without alcohol. SqueekyKleen™ is less harsh on hands, reduces chemical odors and vapor concentrations to a minimum in splice trailers and vaults. Unique formulation and specially designed high-performance towelettes work to remove pic from the entire surface of loose-tube or ribbon fibers, leaving no residue. Safe on acrylate and Mylar®.

PART #	DESCRIPTION	PRICE
F1-TC1	Telcom Cleaner-Saturated Wipe, 7.5"x12" wipe size (12 pk.)	\$19.95



F1-1091T

POLYWATER HYDRASOL® SOLVENTS (ICKY-PIC CLEANER)

HydraSol® is a water-based solvent cleaner that is amazingly effective at dissolving and removing cable filling greases (Icky Pic). This economical product easily rinses off hands and tools. Our tear-resistant, presoaked towelette comes in an easy-open foil pack and is especially effective for smaller cleaning jobs and fiber optic splicing.

PART #	DESCRIPTION	PRICE
F1-1091T	HydraSol® Premoistened Tissues, 7.5"x12" wipe size (12 pk.)	\$19.95
F1-1091GP	HydraSol® 1 Gallon Jug	75.95



F1-CP421



F1-1003



CP400



S1P100P

ITW CHEMTRONICS DE-GREASER WIPES

PART #	DESCRIPTION	PRICE
F1-CP421	Electro-Wash® Wipes, 8"x10" wipe size (25 individual wipes per box)	\$53.95



HAZMAT FEES
MAY APPLY

ITW CHEMTRONICS OPTIC PREP WIPES

PART #	DESCRIPTION	PRICE
F1-1003	Optic Prep Tissue Pack Box, 4"x8" wipe size (50pk)	\$33.95
CP400	Pre-Saturated Cleaning Wipe - Lint Free, 4"x3" wipe size (50pk)	34.95



HAZMAT FEES
MAY APPLY

ITW CHEMTRONICS OPTIC PREP WIPES

PART #	DESCRIPTION	PRICE
S1P100P	Pre-Saturated Wipes, 100 wipes per tube (Ground shipping required) - Hazmat Fees May Apply.	\$34.95



PT TECH D'GEL SOLVENTS

D'Gel Cable and Tool Cleaner is a full strength solvent specifically developed for removing cable gels, blocking compounds, licky pic, and C-cement. It also removes grease, tar, oil, wax, resin and gum from copper and fiber optic cable. It works equally well on painted surfaces and machine equipment. D'Gel does not contain TCE, HCFC's or methylene chloride.

PART #	DESCRIPTION	PRICE
F1-1011	12 Pack Box of Premoistened Tissues	\$41.95
F1-1091G	1 Gallon Jug	95.00
F1-1091S	32 oz. Spray Bottle	27.95



F1-1091S

FC451

CORNING FIBER-CLEAN® TOWELETTES

Remove licky pic and water blocking compounds with Fiber-Clean® Towelettes. Each pre-moistened tissue enables installers to clean and prepare optical fibers for connectorization and splicing. There are 35 tissues in each Fiber-Clean® "pop-up" Dispenser. **Ground shipping required.**

PART #	DESCRIPTION	PRICE
FC451	Fiber-Clean® Towelettes, 6"x9" wipe size	\$30.95



TC-128

TC-35LF

TC-35LR

POLYWATER SQUEEKYKLEEN™

No follow-up with alcohol required to get fibers squeaky clean and separated when prepping for splicing. SqueakyKleen™ is less harsh on hands and reduces chemical odors and vapor concentrations to a minimum in splice trailers and vaults. SqueakyKleen™ helps keep splice equipment clean of contamination for better fiber alignment and splice quality. Safe on acrylate and Mylar®.

PART #	DESCRIPTION	PRICE
TC-16LF	Telcom Cleaner with Flip Top (6 oz.)	\$15.95
TC-35LF	Telcom Cleaner with Flip Top (1 qt)	17.50
TC-128	Telcom Cleaner (1 gallon)	52.25
TC-35LR	Telcom Cleaner with Sprayer	19.95



12890

05930

KIMBERLY CLARK WYPALL ALL PURPOSE TOWELS

For wiping small parts or reaching tight spaces, you can't beat WYPALL™ Detail Wipers. Unlike rags and shop towels, this small format wipe is specifically designed for detail work. Plus it delivers the durability, absorbency and convenience you need for those small but important tasks.

PART #	DESCRIPTION	PRICE
05930	WypAll Towels, 9x17" wipe size (80pk) - X80	\$22.95
12890	WypAll Towels, 11"x17" wipe size (68pk) - X90 - Highest Performing	26.95



91371

KIMBERLY CLARK WATERLESS CLEANING WIPES

Heavy duty hand cleaning wipes. Pre-moistened wipes with a heavy-duty waterless cleanser. Gets hands clean in the same place they got dirty.

PART #	DESCRIPTION	PRICE
58310	Dispenser with 50 Ct Cleaning Wipes (9" x 12")	\$11.95
91371	Dispenser 75 Ct Waterless Cleaning Wipes (9" x 12")	19.50
91367	75 Ct Refill for 91371 Bucket Dispenser (9" x 12")	14.75



HTC-D72

POLYWATER GRIME-AWAY™ CLEANING WIPES

Grime-Away™ wipes are heavy-duty towelettes pre-moistened with a multi-purpose cleaning solution. Grime-Away™ moisturizes and softens hands while cleaning tools and surfaces. Grime-Away™ towels feature a textured side to quickly remove greases, dirt, and grime. They also feature a soft side to be gentler on skin.

PART #	DESCRIPTION	PRICE
HTC-D72	Polywater Grime-Away, 10"x12" wipe size (72ct)	\$16.95



42272

HAND CLEANER TOWELETTES

When working with optical fiber, it is good practice to keep hands clean to ensure they are free of contaminants. However, soap and water are not always available on the jobsite. SCRUBS pre-moistened towels provide the answer, removing even hard to clean industrial soils and grease without water. Pleasant citrus fragrance and gentle on skin.

PART #	DESCRIPTION	PRICE
42272	Hand Cleaner Towels, 10"x12" wipe size (72pk)	\$18.95

F1-6712



FIS FIBER SWIPE500

This unique handheld connector ferrule end face cleaner removes dust, dirt and contaminants prior to mating a fiber optic connection. The fiber optic cleaner fits well in the technician's hand with a convenient trigger that automatically opens the top cleaning window to expose a single microfiber cleaning slot. Simply swipe the ferrule end-face with light pressure against the microfiber with the directional arrow and then release the trigger.

PART #	DESCRIPTION	PRICE
F1-6712	FIS Fiber Swipe500	\$40.95
F1-6713	Replacement Reel (20 ft)	17.95

F1-7020C



FIS CONNECTOR CLEANER

Choose the FIS Hand Held Connector Cleaner as an alternative to alcohol or solvent and wipes. The cartridge offers lint-free, clean room grade cleaning media which effectively removes dirt, dust, oil, grease and debris from connector endfaces. A new resilient rubber pad beneath the cleaning surface prevents scratching, and a sliding cover protects the cleaning media from contamination when not in use. Reel refills available.

PART #	DESCRIPTION	PRICE
F1-7020C	FIS Connector Cleaner Universal (400 cleans)	\$12.95
F1-7021C	FIS Cleaning Media Replacement Reel (20 ft.)	6.95

F1-7111



FIS CONNECTOR CLEANER WITHOUT RETRACTABLE COVER

PART #	DESCRIPTION	PRICE
F1-7111	FIS Connector Cleaner Universal (240 cleans)	\$18.00
F1-7112	Replacement Reel for F17111 (10ft.)	7.95

F1-6270S



CLETOP CLEANING PRODUCTS

The CLETOP optical fiber connector cleaners are rugged handheld tools for cleaning fiber optic connector end faces. The CLETOP cleaners quickly and effectively clean a variety of connectors. CLETOP cleaners are a safe cleaning option without the need for isopropyl alcohol, which is toxic and flammable. CLETOP cleaners have refillable cleaning tapes with 400 cleans per tape making them ideal for lab and field use. The simple push button shutter operation makes cleaning connectors quick and easy.

The CLETOP-S Series is a second generation CLETOP cleaner offering the same CLETOP cleaning performance with "drop-in" replacement tape cartridge and ergonomic design that works equally well for left or right handed operators.

F1-6270



PART #	DESCRIPTION	PRICE
F1-6270	Cletop Connector Cleaner - SC, FC, ST, E2000 (Replacement Blue Tape F1-6271)	\$100.00
F1-6270MTRJ	Cletop MTRJ Male Cassette with White Tape (Replacement White Tape F1-6277)	110.00
F1-6270MT	Cletop MTP/MPO Male Cassette with White Tape (Replacement White Tape F1-6277)	110.00
F1-6210MF	Cletop MTRJ/MTP Female Cassette with White Tape (LC, MU also) (Replacement White Tape F1-6277)	110.00
F1-6270S	Cletop-S Connector Cleaner - SC, FC, ST, E2000 (Blue Tape F1-0700)	90.00
F1-6270SMT	Cletop-S Connector Cleaner for LC, MU, Female MTP and MT-RJ (White Tape F1-0701)	90.00
F1-6271	Cletop Woven Film Replacement Reel Blue Tape (Type A)	28.95
F1-6277	Cletop Woven Film Replacement Reel White Tape (Type A)	28.95
F1-0700	Cletop-S Tape Cartridge Blue Tape (Type S)	28.95
F1-0701	Cletop-S Tape Cartridge White Tape (Type S)	28.95

Note:

The Blue Tape is the original color tape. It was used on connectors with 2.5mm diameter ferrules such as the FC, ST, and SC. With the introduction of the smaller 1.25mm diameter ferrules such as used in the LC connector and multifiber connectors such as the MPX, there was some concern the smaller geometry connectors might "snag" on the somewhat looser weave of the Blue Tape. Therefore, a smoother White Tape was developed. Over time, with very few exceptions, the looser weave of the Blue Tape turned out to not be a problem for the smaller geometry ferrules. Currently, the selection of Blue or White Tape is primarily user preference.

F1-0700



FCRC



OPTIPOP CLEANING PRODUCTS

OPTIPOP fiber optic connector cleaners are rugged palm-sized units that offer exceptional performance field-proven by technicians over years of service. Cost-effective refillable cleaning tape with over 400 cleans per tape.

PART #	DESCRIPTION	PRICE
FCRC	Optipop Fiber Optic Connector Cleaner (25 ft.)	\$75.00
FCRR	Optipop Cassette Refill	25.00
FCRCMTP	Optipop MTP/MPO Male Fiber Optic Connector Cleaner	75.00
FCRCMTRJ	Optipop MTRJ Male Fiber Optic Connector Cleaner	75.00

SCKPTMPOGSC-05



SENKO MPOPLUS®

The SENKO MPOPLUS® Effective for removing oil, dust, and dirt particulates that can have a negative impact on fiber optic performance. Pad cleans entire MPO Endface including PIN area. Easy to use with a push-pull function. Stick cleans MPO adapters. Each item is used separately.

PART #	DESCRIPTION	PRICE
SCK-PT-MPO-GSC-05	MPO Smart Cleaner GEL Stick for cleaning adapters (pack of 5)	\$12.95
SCK-PT-MPO-01	MPO Smart Cleaner GEL Pad for cleaning connector endface	9.30

SCKPTMP001



FIS BULKHEAD & PATCH CABLE FERRULE CLEANER

The adapter or mating sleeve, when connected on far side creates a bulkhead opening which can be cleaned without removing the connector.

PART #	DESCRIPTION	PRICE
F1-6715	FIS 2.5mm Bulkhead Ferrule Cleaner (audible "click" with rotating head) (525+ cleans)	\$45.50
F1-6716	FIS 1.25mm Bulkhead Ferrule Cleaner (audible "click" with rotating head) (525+ cleans)	45.50
F1-6717	Refillable Bulkhead Fiber Optic Cleaner for 2.5mm Ferrules and Alignment Sleeves, SC, ST, FC and E2000, UPC & APC (750+ cleans)	64.75
F1-6718	Refillable Bulkhead Fiber Optic Cleaner for 1.25mm Ferrules and Alignment Sleeves, LC, and MU, UPC & APC (750+ cleans)	71.95
F1-6717R	Refill for FIS Fiber Optic Cleaner F16717 for SC, ST, FC & E2000 (750+ cleans)	56.00
F1-6718R	Refill for FIS Fiber Optic Cleaner F16718 for LC & MU (750+ cleans)	56.00
F1-6725	Connect-O Clean Bulkhead Ferrule Cleaner for 2.5mm connectors (SC,ST,FC) (525+ cleans)	41.25
F1-67125	Connect-O Clean Bulkhead Ferrule Cleaner for 1.25mm connectors (LC/MU) (525+ cleans)	41.25

IBC™ BRAND CLEANING TOOLS SERIES

The US Conec IBC™ Brand Cleaners are mechanical cleaning tools designed to clean connectors residing in an adapter or faceplate and unmated connectors. The IBC™ Brand Cleaning tools use a novel dry cleaning strand to gently sweep and lift away dust and residues from the connector end face.

FEATURES

- Audible "click" to alert the operator when tool is fully engaged
- Over 525+ engagements per unit
- Dry cleaning strand eliminates the need for solvents to be effective
- Impact resistant to survive drops over 1.5M

PART #	DESCRIPTION	PRICE
9392	IBC™ Cleaner SC (SC,ST, FC and E2000)	\$49.95
9393	IBC™ Cleaner LC (LC, MU) - pictured	49.95
9394	IBC Brand Cleaner HC - OptiTap FTTH Connectors	55.95
7104	MTP/MPO Bulkhead Cleaner (525+ cleans)	71.95
12910	IBC™ Cleaner H-125 (1.25mm Harsh Environment Connectors)	68.00
12926	IBC™ M20 Cleaner SMTPE 304M (2mm Harsh Environment Connectors)	68.00
13310	IBC™ Cleaner M250 for TFOCA II® (2.5mm Connector Systems) - pictured	68.00
13964	IBC™ Mini-Clean 2.5mm (SC, ST, FC, E2000 - with key chain) - pictured	64.00
13965	IBC™ Mini-Clean 1.25mm (LC, MU - with keychain)	64.00
14303	IBC™ Brand Cleaner LC Duplex - pictured	87.50
22046	IBC™ MDC Cleaner - pictured NEW	115.95

SENKO BRAND SN/CS CLEANERS

The Senko brand SN/CS One-Click Cleaners offer dual cleaning of end faces and reduce cleaning times. They have self aligning cleaning tips for consistent cleaning performance of unmated and in adapter end faces. Both are RoHS and REACH compliant with no shelf life or restrictions on storage or shipments. Each model works for UPC and APC polished end faces. Most effective cleaning when inserted into adapter ports and transceiver ports in the up or down position. The cleaners lock up at the end of life cycle alerting the operator that it is time to be reordered.

PART #	DESCRIPTION	PRICE
SCKDCCS	Senko CS One-Click Duplex Cleaners	\$135.00
SCKDCSN	Senko SN One-Click Duplex Cleaners	135.00

AFL ONE-CLICK® CLEANER

The One-Click Cleaner is an easy-to-use option for cleaning connectors in adapters. Simply insert the One-Click Cleaner into an adapter and push until an audible "click" is heard. The One-Click Cleaner uses the mechanical push action to advance an optical grade cleaning tape while the cleaning tip is rotated to ensure the fiber end-face is effectively, but gently, cleaned. The One-Click Cleaner is a must-have for field technicians. Small enough to fit in a shirt pocket and a great addition to cleaning kits.


PART #	DESCRIPTION	PRICE
85003MZ	One-Click® Cleaner MPO/MTP (500+ cleans)	\$57.25
85001MZ	One-Click® Cleaner SC, ST, FC 2.5mm ferrules (500+ cleans)	57.25
85002MZ	One-Click® Cleaner LC/MU 1.25mm ferrules (500+ cleans)	57.25
8500-05-0007MZ	One-Click Ultra Cleaner 2.5 (enlarged cleaning) SC, ST, FC (500+ cleans)	68.95
8500-05-0008MZ	One-Click Cleaner D-LC, Duplex LC (2 x 500+ cleans)	80.95
8500-05-PRO-SC	One-Click Cleaner SC PRO (775+ cleans)	89.75
8500-05-PRO-LC	One-Click Cleaner LC PRO (775+ cleans)	89.75

FERRULE MATE™

Wouldn't it be great if you could limit your connector cleaning supplies to one versatile tool? You can, with Ferrule Mate™. The device cleans recessed fiber optic adapters as well as individual connectors. With the push of a button, the tool forwards and rotates the cleaning cloth. Cloth provides approximately 350 swipes, with a cost as low as 18 cents per cleaning. Use the SFM-250 for SC, FC, and ST. Use the SFM-125 for MU and LC.

PART #	DESCRIPTION	PRICE
SFM-250	Ferrule Mate™ 2.5mm Ferrules	\$57.00
SFM-125	Ferrule Mate™ 1.25mm Ferrules	57.00





FIS WRAPPED SWABS - 2.5mm and 1.25mm

INTENDED FOR FERRULE END-FACE OR ALIGNMENT SLEEVE CLEANING

PART #	DESCRIPTION	PRICE
F1-25184	2.5mm Wrapped Swabs (5pk)	\$4.00
F1-25183	2.5mm Wrapped Swabs (100pk)	65.00
F1-25123	1.25mm Wrapped Swabs (5pk)	3.75
F1-25123B	1.25mm Wrapped Swabs (100 pk)	45.00



CLETOP CLEANING SWABS

INTENDED FOR FERRULE END-FACE OR ALIGNMENT SLEEVE CLEANING

PART #	DESCRIPTION	PRICE
F1-0401	Cletop Stick 1.25mm (5 pk)	\$5.95
F1-0400	Cletop Stick 2.5mm (5 pk)	5.95
F1-0402	Cletop Stick 2.0mm MIL-AERO Application (5 pk)	5.95
F1-0403	Cletop 2 Sided Stick (2.0mm and 2.5) (5 pk)	12.95



OPTIPOP CLEANING SWABS

INTENDED FOR FERRULE END-FACE OR ALIGNMENT SLEEVE CLEANING

PART #	DESCRIPTION	PRICE
F1-636510P	Optipop Stick Cleaner 1.25mm (10 pk)	\$7.95
F1-636610P	Optipop Stick Cleaner 2.5mm (10 pk)	7.95



FIS MINI-FOAM TIP SWABS - 2.5mm

INTENDED FOR FERRULE END-FACE OR ALIGNMENT SLEEVE CLEANING

PART #	DESCRIPTION	PRICE
F1-0005	2.5mm Mini Foam Swabs (50 pk)	\$15.25



FIS FUSION SPLICER V-GROOVE CLEANING SWAB

PART #	DESCRIPTION	PRICE
F1-38542F	V-Groove Cleaning Swab (50 per tube)	\$20.50



FIS FUSION SPLICER LENS CLEANING SWAB

PART #	DESCRIPTION	PRICE
F1-51125F	Fusion Splice Lens Cleaning Swab (15 per tube)	\$21.95

F1-51125F

DRY WET

FIS ALCOHOL CLEANING COTTON SWABS

PART #	DESCRIPTION	PRICE
F1-SWB110PK	Contact Clean Pack (Single Sided Swabs 1-dry and 1-wet (10 pk)	\$21.95

* Not for use with mating sleeves



FIS GENERAL PURPOSE COTTON SWABS

PART #	DESCRIPTION	PRICE
F1-0006	General Purpose Cotton Swabs, 1 Bag (100 pk)	\$5.25

* Not for use with mating sleeves

FIS ADHESIVE TIP DEBRIS REMOVAL SWAB

This swab has an adhesive tip for gathering fiber shards within the work area or cleaver mechanism.

PART #	DESCRIPTION	PRICE
F1-51005	Debris Removal Swab - with Adhesive (5 pack)	\$3.50
F1-5100100	Debris Removal Swab - with Adhesive (100 pack)	40.00

CONNECTOR CLEANING STICKS

MicroCare cleaning sticks use a fibrous sintered polymer tip that is molded, not hand wound. These cleaning sticks deliver fast and consistent cleaning, even inside alignment sleeves. Compatible with a wide variety of solvents in today's optical market. 50 sticks per clamshell.

PART #	DESCRIPTION	PRICE
MCC-S25	2.5mm Clamshell (50 pk)	\$37.75
MCC-S12	1.25mm Clamshell (50 pk)	36.00
MCC-VS	Combo Pack (20) 2.5, (10) 1.25mm and (20) Military Termini	37.75





F1-6714MPO



F1-0053FSMINI



F1-0053CKM



F1-0053CKV

FIS CLEANING KITS

Fiber optic cleaning kits contain all the cleaning supplies you need for fast, reliable fiber optic cleaning. They help keep your installation up and running. They can be wall mounted or come in tough nylon carry cases.

PART #	DESCRIPTION	PRICE
F1-6714	FIS Fiber Optic Cleaning Station - Wall Mountable (includes: FiberSwipe 500, 2.5 & 1.25mm Bulkhead Cleaners, Cleaning Solvent & Dry Wipes)	\$235.00
F1-6714MPO	FIS Fiber Optic Cleaning Station for MPO/MTPs - Wall Mountable (includes: FiberSwipe500, RotoSwipe 2.5 & 1.25mm Bulkhead Cleaners)	265.00
F1-0053FSMINI	FIS Mini Fiber Optic Cleaning Kit (includes: degreaser wipes, alcohol wipes, FIS connector cleaner, ITW Electro Wash MX pen, mini foam swabs, and dry wipes)	79.95
F1-0053CK	FIS Fiber Optic Cleaning Kit (includes: 1.25 and 2.5mm swabs, dry wipes, alcohol wipes, canned air, connector cleaner, 4oz alcohol bottle)	116.95
F1-0053CKM	FIS Cleaning Kit with Microscope (includes: F10053CK Kit plus a 200x Microscope)	195.00
F1-0053CKV	FIS Fiber Optic Connector Endface Cleaning Kit (includes: solvent cleaner, dry wipes, one click cleaners for 1.25mm and 2.5 mm)	195.00

FIS 5G CLEANING KITS - RRH CABLES

New applications in the field with the implementation of high density radio heads for 5G deployment will require an increase in the use of hardened fiber optic connectors. Manufacturers of different radio heads have adopted certain hardened connector interfaces between their equipment and outdoor distribution enclosures. Technicians will find themselves confronted with new style connectors that may require deeper cleaning of the housing threads, inner body, O-rings and connector ferrule end face. The unique 5G Cleaning Kits are targeted to provide a wider selection of popular cleaning tools and solvents to address new crevices in hardened connectors that are soiled from outdoor environments.



KIT CONTENTS & INTENDED USE

- Pressurized Canned Air and Alcohol – Clean and dry to remove any creviced debris or water.
- Connector End face Cleaning solution – Fast evaporating solvent intended for fiber optic end face.
- Connector Endface Cleaner – Auto Advancing 2.5mm and 1.25mm end face connector cleaning.
- Cleaning swabs – (3) different style swabs for cleaning internal body components and threads.
- Dry Wipes- Woven Cleaning wipes that won't tear while using for outer or inner body cleaning.
- Moistened Towelettes- Outer connector body and cable cleaning.
- (Optional) MPO Endface Cleaner – Auto Advancing cleaner for MTP or MPO end face cleaning.

PART #	DESCRIPTION	PRICE
F15GC	5G Hardened Connector Cleaning Kit (includes Auto Advance Cleaners for SC/LC connectors)	\$228.95
F15GCM	5G Hardened Connector Cleaning Kit w/ MPO Auto Advancing Cleaners	367.95

CHEMTRONICS FIBER OPTIC CLEANING KITS

A high-quality fiber optic installation starts with the connectors. Our Fiber Optic Cleaning Kit not only gives you clean connectors, but also faster transmission rates, higher bandwidth, and maintenance-free operation. Fiber optic kits include all the tools you need to achieve clear connections.

PART #	DESCRIPTION	PRICE
CFK1000	ITW Chemtronics FTTH Fiber Optic Cleaning Kit (includes: (1) QBE, (1) ES810, (50) 48042F, (50) 38542F, (15) 51125, (100) 6704F, (5) CP421)	150.75



CFK1000

STICKLERS FIBER OPTIC CLEANING KITS

There are many different Sticklers™ fiber optic cleaning kits. Each has been engineered to help techs in different industries clean fiber networks quickly, reliably and inexpensively. Each kit conveniently provides all the tools a tech needs to get the job done right.

PART #	DESCRIPTION	PRICE
FK03	Sticklers Fiber Optic Cleaning Kit (includes: connector cleaner solution, wipes, clean stixx and LED flashlight)	\$135.00
FK05	Sticklers Military-Ready Cleaning Kit (includes: connector cleaner solution, wipes and Clean Stixx for S25, S16, S12, XMT, and P25 (Not Pictured))	135.00



FK03

DURABLE, CONVENIENT, AND FULLY CUSTOMIZABLE

How To Design Your Custom Tool Kit

Step 1:

Select your hard or soft case preference. The extra large educational kit size accommodates the most items.

Step 2:

Select the list of items. You may choose individual or all items from FIS or start by simply adding items to a listed kit closest to what fits your desired requirement. Your kit choices include: Basic Fiber Optic Tool Kit, Connectorization Tool Kit, Fusion Splice Kit and Test Set Kit plus many more.

Step 3:

If you choose you may add additional accessories to your kit that are most popular amongst our customers. These popular additional accessories include: patchcords, connectors, mating sleeves, splice protection sleeves, attenuators, cable cutting tools, epoxy and microscopes to name a few.



FIS is the leader in the fiber optic industry and offers the best value on Tool Kits. Every year FIS expands upon its Tool Kit line and upgrades several tools to show our commitment to providing quality kits. The Universal Connectorization Epoxy Tool Kit provides a technician with materials to prep and connectorize standard fiber optic connectors such as ST, SC, and FC. For technicians searching for the ultimate Tool Kit, review our Universal Multimode Test Set Kit and Fusion Splicing Kits.

CUSTOMIZE ANY TOOL KIT

You have the option to customize any of the FIS Tool Kits. You can add or swap items from the FIS kits. Please contact an FIS Sales Representative for pricing.

TEST EQUIPMENT OPTIONS

FIS Pocket Fault Locator
FIS Power Meters
FIS Light Sources
FIS Talk Sets
FIS Mini-OTDR
FIS Pulse Suppressors and Test Boxes

ATTENUATOR OPTIONS

FIS Male-Female attenuators in 1-20dB for FC, FC/APC, SC, SC/APC, ST, LC, LC/APC and MU
FIS variable attenuators

KEVLAR CUTTER OPTIONS

F1KS1 - Miller Scissors
F100201 - FIS Economy Scissors
F16430 - Clauss Kevlar Cutters
F19809 - Miller Kevlar Cutter

CUSTOM KIT CASE OPTIONS

PART

F1-0053UNL
F1-0053BSC

DESCRIPTION

FIS Standard Tool Case, unloaded - Empty
FIS Mini Soft Case, unloaded - Empty

PATCH CABLE OPTIONS

FIS Singlemode simplex and duplex patch cables
FIS Multimode simplex and duplex patch cables
FIS Specialty patch cables: MTP, MT-RJ, E2000, MU, ESCON, FDDI or Polarization Maintaining patch cables

FIBER OPTIC STRIPPER OPTIONS

F1-1301T - FIS Precision Fiber Stripper
W01224 - Miller Stripper
PA1171 - Paladin Fiber Optic Stripper

MICROSCOPE OPTIONS

F1MS200U - FIS 200x Compact Microscope
F1VS400F2.5 - FIS 400x Handheld Microscope
F1VSF25 - FIS 100x Handheld Universal Scope



F1-0053UNL



F1-0053BSC

DIMENSIONS and WEIGHT (W x L x D)

20" x 15" x 8", 10 lbs
16" x 11" x 5", 4 lbs

PRICE

\$285.00
155.00

FIS BASIC FIBER OPTIC TOOL KITS

Featuring
New
Tools!

Kit Contents



**Fiber Optic Kit
F1-0053**

PART #	DESCRIPTION	PRICE
F1-0053	Basic Tool Kit with New Tools & VFL*	560.00
F1-0053C	Replacement Consumable Kit*	52.25
F1-0053SB	Basic Tool Kit with Soft Case	430.00

*No Overnight / Air Ship Allowed

INQUIR FOR OVERNIGHT AIR SHIPMENTS

CONNECTORIZATION EPOXY TOOL KIT (SC, FC, ST, LC, MU)

Includes all items in FIS Basic Tool Kit (F1-0053) plus:

- Carbide Scribe (F1-9773)
- FIS Universal Crimp Tool (F1-3227)
- Rubber Polish Pad (PP-575)
- Glass Polish Plate (F1-9111)
- (5) Syringes (5014733IRC5)
- Universal Polish Puck (F1-6925UN)
- (5) 0.3µm Polish Film Sheet (F1-0102-03S)
- (5) 1µm Polish Film Sheet (F1-0102-1S)
- (5) 5µm Polish Film Sheet (F1-0102-SS)
- Instructions for FIS Connectors ST, FC and SC (F217)
- (5) FIS 4gr. Blue Dye Epoxy (T60-065-B4)
- FIS Universal Microscope (F1-MS200U)
- LC/MU Crimp Die (F18825LM)
- LC/MU Polish Puck (F16925UN)
- LC Instructions (F217)
- (5) 0.5µm Diamond Film (DLF6X6.5661X)
- (5) 1.5µm Diamond Film (DLF6X61.5661X)

PART #	DESCRIPTION	PRICE
F1-0053U	Universal 2.5mm Epoxy Connectorization Tool Kit (SC, FC, ST)	\$875.00
F1-0053UO	Universal Epoxy Connectorization Tool Kit with 24-Port Heat Oven, 110 VAC	1,095.00
F1-0053UO220	Universal Epoxy Connectorization Tool Kit with 24-Port Heat Oven, 220 VAC	1,200.00

FIS MINI BASIC FIBER OPTIC TOOL KIT

- Mini Soft Case (F1-0053BSC)
- PVC Electrical Tape (F1-0008)
- Tri-Hole Fiber Stripper (F1-1301T)
- FIS Connector Cleaner (F1-7020-C)
- Kevlar Scissors (F1-KS1)
- Buffer Tube Stripper (F1-0017)
- Round Cable Slitter (MK02)
- 6" Side Cutting Pliers (200038)
- (50) Foam Swabs (F1-0005)
- Fiber Optic Wipes (F1-6702)
- Utility Knife (F1-0023BLK)
- Tweezers (F1-0019)
- Needle Nose Pliers (100021)
- 4 Bit Screwdriver (F1-0027)
- Black Marker (F1-9104)
- Ruler (RMC-6)
- Fabric Tape Measure (F1-8273)
- 2 oz. Cleaning Solvent (F1-6706)
- Piano Wire (F1-8265)
- (5) Fusion Splice Sleeve 60mm (F1-1002C)

PART #	DESCRIPTION	PRICE
F1-0053MSB	Mini Basic Fiber Optic Tool Kit	\$375.00

FIS FUSION SPLICING TOOL KIT

Includes items in FIS Basic Tool Kit, plus:

- (5) Degreaser Wipes (F1-1010)
- Cable Cutters (F1-727)
- * Optional Lynx Cleaver (F1-LYNX)

PART #	DESCRIPTION	PRICE
F1-0053FS	Fusion Splicing Tool Kit	\$625.00
F1-0053FS-C	with Lynx Cleaver (F1-LYNX)	1,065.00



**FIS Basic Handheld Tool Bag
F1-0053HH**



**FIS Handheld Singlemode Test &
Inspection Tool Bag
F1-0053SMTI**

**FIS Backpack Tool Kit
F1-0053PACK**



**Now with
E-Series
PM & LS**



**FIS Universal MM Test Set Tool Kit
F1-0053TS-MME**

FIS HANDHELD TOOL BAG

All items included within the FIS Handheld Tool Bag (F1-0053HH):

- Nut Driver 1/2" (1UG30G)
- FIS 3 Hole Jacket Stripper (F11301T)
- FIS Licky-Clean Fiber Optic Cleaner Towlette (F11010B)
- 3M EMD Black Electrical Tape 3/4" x 60" (F10008)
- FIS Jacket Stripper (F10016)
- Tweezers (F10019)
- Retractable Utility Knife Black (F10023BLK)
- Screwdriver 4-Bit w/FIS name (F10027)
- FIS Fiber Optic Cleaning Solution 2oz (F16706)
- FIS Low Lint Tissues 280 Tissues/Box (F16705)
- FIS Standard Fiber Optic Disposal Unit w/Slide Top (F18327)
- Sharpie Permanent Black Marker, Fine Pt (F19104)
- Miller KS-1 Kevlar Shear (F1KS1)
- Safety Glasses - Clear (F1S13390C)
- Round Cable Jacket Stripper (MK02)
- Stainless Steel 6" Ruler (RMC6)
- Long Nose Pliers 6" Serrated with Green Handle (100021)
- Side Cutting Pliers 6" with Green Handle (200038)
- Ripley Fiber Tube Scoring Tool 1.6mm-6.0mm (80980)
- Miller Mid-Span Access Tool (MSAT5)
- FIS Bulkhead Ferrule Cleaner 2.5mm Connectors - Gray Tip (F16715)
- FIS Bulkhead Ferrule Cleaner 1.25mm connectors - Blue Tip (F16716)
- FIS Pocket Visual Fault Locator (VFL) Univ. 2.5mm Adapter (F19000VFL)
- FIS Visual Fault Locator 1.25mm Adapter (Use w/ F1-9000VFL) (F190125)
- Cable Slitters Armored (F1ACS)
- Dorcy 2AA LED Flashlight (412955)
- Greenlee Power Return Tape Measure 25' (015525A)
- FIS 2.5mm Wrapped Swabs (5pk) (F125184)
- FIS 1.25mm Wrapped Swabs (5 pk) (F125123)
- FIS Connector Cleaner Universal Blue Housing w/20' Tape (F17020C)
- Flexible Piano Wire 8 pc (F18265K)

PART #	DESCRIPTION	PRICE
F10053HH	FIS Handheld Basic Tool Bag	\$775.00
F10053OSP	FIS Handheld OSP Tool Bag (F10053HH plus Miller Flat drop splitter, MB04-7000)	825.00
F10053SMTI	FIS Handheld Singlemode Test & Inspection Tool Bag (F10053HH plus E-Series Power Meter & SM Light Source)	1,125.00
F10053MMTI	FIS Handheld Multimode Test & Inspection Tool Bag (F10053HH plus E-Series Power Meter and MM Light Source)	1,075.00

FIS BACKPACK TOOL KIT

All the great products you became accustomed to in the FIS Tool Kit now in a smaller, lightweight, and durable backpack. (Special custom kits are available). Refer to page 113 for full list of contents.

PART #	DESCRIPTION	PRICE
F1-0053PACK	FIS Backpack Basic Fiber Optic Tool Kit	\$305.00
F1-0053PACKFS	FIS Backpack Fusion Splicing Tool Kit	375.00
F1-0053PACKFSC	FIS Backpack Splicing Tool Kit with Lynx Precision Cleaver	925.00
F1-0053PACKFSCVFL	FIS Backpack Splicing Tool Kit with PFL and Lynx Cleaver	1,025.00
F1-0053PACKFSVFL	FIS Backpack Splicing Tool Kit with Pocket Fault Locator	455.00
F1-0053PACKU	FIS Backpack Universal SC, FC, ST, LC, MU	725.00

FIS UNIVERSAL SM TEST SET TOOL KIT

Includes all items in FIS Universal Epoxy Tool Kit (F1-0053U) plus:

- FIS E-Series Power Meter with Adapter (F1-8513PM)
- FIS E-Series SM 1310/1550nm Light Source (F1-1315LS)
- (2) Simplex 3mm SM Ultra SC/UPC-SC/UPC 2 Mtr (S9YUUS2FISCU)
- (2) Simplex 3mm SM Ultra ST/UPC-SC/UPC 2 Mtr (S98UYUS2FISCU)
- (2) Simplex 3mm SM Ultra FC/UPC-SC/UPC 2 Mtr (S97UYUS2FISCU)
- (2) FIS Simplex 1.6mm SM Ultra LC/UPC-SC/UPC 2 Mtr (Y9LUVUS2FISCU)
- Visual Fault Locator (F1-9000)
- (1) LC SM Simplex Adapter Blue No Flange (F18005NF)
- (1) SC SM/MM Adapter Zirconia Sleeve Blue w/ Flange (F13810BC)
- (1) CORNING ST SM Adapter Threaded (8119)
- (1) Singlemode FC Adapter (F18520)

PART #	DESCRIPTION	PRICE
F10053TSSME	FIS Universal SM Test Set Tool Kit w/E-Series PM & LS	\$1,920.00

FIS UNIVERSAL MM TEST SET TOOL KIT

Includes all items in FIS Universal Epoxy Tool Kit (F1-0053U) plus:

- FIS E-Series Power Meter with Adapter (F1-8513PM)
- FIS E-Series MM 850/1300nm Light Source (F1-8513LS)
- (2) FIS Simplex MM 62.5 SC-SC 2 Mtr Patchcord (S2YUUS2FISCU)
- (2) Simplex MM 62.5um ST/UPC-SC/UPC 2 Mtr Patchcord (S28YM2FISCU)
- (2) Simplex MM 62.5 SC-LC 2 Mtr patchcord (Y2YLM2FISCU)
- (2) Simplex SC-ST MM 50um OM3 Aqua 2 Mtr Patchcord (Y8YUUS2FISCU)
- (2) Simplex SC-SC MM 50um OM3 Aqua 2 Mtr Patchcord (Y8YUUS2FISCU)
- (2) Simplex LC/PC-PC MM 50um OM3 Aqua 2 Mtr Patchcord (Y8YUUS2FISCU)
- (1) SC Simplex MM Adapter Zirconia Beige No Flange (F13800CNF)
- (1) LC MM Simplex Adapter Beige - No Flange (F18000A)
- (1) ST MM Adapter Bronze Sleeve (F18102SS)
- (1) 4mm Mandrel for Bend-Insensitive MM Fiber for 1.6/2mm cable (F1C0M04)
- (1) MM Mandrel Kit (50um and 62.5um) (F1MM6250)
- (1) Pocket Fault Locator (F1-9000)

PART #	DESCRIPTION	PRICE
F10053TSMME	FIS Universal MM Test Set & Connectorization Tool Kit w/E Series PM & LS	\$1,920.00

FIS ANAEROBIC TOOL KIT (SC and LC) (NOT PICTURED)

Includes all items in FIS Basic Tool Kit (F1-0053) plus:

- Anaerobic Adhesive Hardener (680)
- Anaerobic Primer (7649)
- (10) Syringe Tips (5014731RC5)
- Carbide Scribe (F1-9773)
- Universal Crimp Tool (F1-3227)
- LC/MU Crimp Die (F1-8825LM)
- Rubber Polish Pad (PP-575)
- (5) 1µm Polish Film Sheet (F1-0102-15)
- (5) 5µm Polish Film Sheet (F1-0102-55)
- (5) 0.3µm Polish Film Sheet (F1-0102-035)
- (5) 1.5µm Diamond Film Sheet (DLF6X61.5661X)
- (5) 0.5µm Diamond Film Sheet (DLF6X6.5661X)
- Glass Polish Plate (F1-9111)
- 2.5mm Universal Polish Puck (F1-6925UN)
- LC Universal Polish Puck (F1-6930UN)
- FIS Universal Microscope (F1-MS200U)

PART #	DESCRIPTION	PRICE
F1-0053AH	FIS Anaerobic Tool Kit	\$1,295.00



DATA CENTER CLEANING STATION

The FIS Fiber Optic Cleaning Station is a unique new product that provides immediate access to cleaning supplies for technicians. These cleaning kits are wall mountable similar to First Aid kits found throughout many facilities. Open the top cover and find cleaning notes for technicians not familiar with fiber optics. Kits include cleaning instruments for both 2.5mm and 1.25mm ferrules on patch cables and through adapters in the back plane of enclosures. Optional MPO/MTP cleaning tool can be added to kit as well. Special edition and custom kits are available. Standard kit contents: (100) 4"x4" Clean Dry Wipes, 2 oz. Cleaning Solution, Auto-Advance Connector Cleaner, 2.5mm and 1.25mm back plane ferrule cleaning tools. Optional kits with MPO/MTP cleaning tool or choice of IBC™ Cleaners/AFL One Click Cleaners.

PART #	DESCRIPTION	PRICE
F1-6714	Fiber Optic Cleaning Station, Standard Kit	\$235.00
F1-6714MPO	Fiber Optic Cleaning Station, Standard Kit with MPO/MTP cleaning tool	315.00
F1-6714IBC	Fiber Optic Cleaning Station, Special Edition Kit with IBC™ cleaning tools for 2.5/1.25mm adapters	225.00
F1-6714IBCMPO	Fiber Optic Cleaning Station, Special Edition Kit with IBC™ cleaning tools for 2.5/1.25mm adapters and MPO/MTP cleaner	305.00
F1-6714AFL	Fiber Optic Cleaning Station, Special Edition Kit with AFL cleaning tools for 2.5/1.25mm adapters	240.00
F1-6714AFLMPO	Fiber Optic Cleaning Station, Special Edition Kit with AFL cleaning tools for 2.5/1.25mm adapters and AFL MPO/MTP cleaner	315.00


F1-6714

FIS FIBER OPTIC CLEANING KIT

- Canned Air (10oz) (F1-1007S)
- Fiber Optic Wipes (F1-6702)
- 2.5mm Foam Swabs (5pk) (F1-25184)
- 1.25mm Wrapped Swabs (5pk) (F1-25123)
- Alcohol Wipes (50pk) (F1-1004)
- FIS Connector Cleaner (F1-7020-C)
- 4 oz. Bottle of Alcohol (F1-00075P)

PART #	DESCRIPTION	PRICE
F1-0053CK	Fiber Optic Cleaning Kit	\$116.95
F1-0053CKM	With 200X Microscope (Pictured)	200.00
F1-0053CKC	Replacement Consumables	55.95


**FIS Fiber Optic Cleaning Kit
F1-0053CKM**

FIS MINI CLEANING KIT

The FIS Mini Cleaning Kit provides all of the essential cleaning supplies needed for fiber splicing and connector cleaning. Kit includes: (1) FIS Connector Cleaner, (1 pack of 50) 2.5mm Mini Foam Swabs, Cleaning Pen, (1 pack of 100) 4" x 4" Non Woven Dry Wipes, (1 pack of 100) 4" x 6" Alcohol Towlettes, (1 pack of 12) FIS Icky Clean, Carry Case

PART #	DESCRIPTION	PRICE
F1-0053FSMINI	FIS Mini Fiber Optic Cleaning Kit	\$79.95


F1-0053FSMINI

DYMO RHINO™ INDUSTRIAL 5200 HARD CASE KIT

Rugged, versatile, and packed with time-saving features, the Rhino™ 5200 meets key ANSI and TIA/EIA 606-A labeling standards – and labels up to 77% faster than the competition. Proprietary Rhino "Hot Key" to automatically size, space and format text for perfect patch panel labels – then press another to print matching cable flags or face plate tabs, without retyping. Print module and fixed-length labels, horizontal and vertical wire wraps, terminal and 110 blocks and much more. Print Code 39 and Code 128 barcodes. Access 100+ industry symbols, fractions, and punctuation marks with a few quick keystrokes. Add the optional quick-charging lithium-ion battery for uninterrupted productivity.

Kit Contents: Rhino Industrial 5200 Label Maker, 3/4" White IND Vinyl Label Cartridge, 3/8" White IND Vinyl Label Cartridge, User Manual CD-ROM, Quick Reference Guide, AC Adapter, Carry Case, Rechargeable Lithium-ion Battery.

PART #	DESCRIPTION	PRICE
1756589	RHINO 5200 Hard Case Kit	\$420.00
DY18443	RHINO 3/8" White Vinyl Label Cartridge	\$23.95
DY18444	RHINO 1/2" White Vinyl Label Cartridge	32.50
DY18488	1/2" Flex Nylon - Black/White Label Cartridge	29.95

CABLE MARKER TAPE DISPENSER

A dispenser holding 10 rolls of tape, numbered 0-9, gives you the ability to tag patch cables in your fiber optic system for easy identification. The 0-9 rolls of tape may be purchased under a separate part number. **Replace "X" with desired number 0-9 for replacements.**

PART #	DESCRIPTION	PRICE
STD09X	ScotchCode Wire Marker Dispenser with Tape STD-0-9	\$51.95
SDR09	Numerical marker, numbers 0 through 9	45.00
SDRX	Replacement Reel, individual numbers 0-9 (Replace "X" w/ individual number)	3.35


1756589

STD09



F1-1301T

FIS PRECISION FIBER OPTIC STRIPPERS

FIS Precision Fiber Optic Strippers removes the 3mm jacket, 900µm tight buffer and 250µm buffer coating. Precision blades produce consistent clean strips. Tool length: 6.25 inches

PART #	DESCRIPTION	PRICE
F1-1301T	250µm, 900µm and 3mm Fiber Optic Stripper Three Hole	\$26.95

RIPLEY MILLER SERIES FIBER OPTIC STRIPPERS

The Miller Series Stripper is an exceptional tool recommended for stripping 250µm coated fiber and 900µm buffered fiber. The Miller Series Stripper has a .0055" (0.14mm) laser drilled hole, soft plastic-cushioned handle grip, and super accurate hardened stripping jaws, ensuring smooth clean stripping action.

PART #	DESCRIPTION	PRICE
WO-1224	Miller Stripper (Strips 250µm) (Miller PN F0103-S-250)	\$42.95
WO-1224D	Dual Hole Stripper (Strips 250µm or 900µm) (Miller PN F0103-D-250)	77.95
WO-1224T	Tri Hole Stripper (Strips 250µm, 900µm, 3mm Jacket) (Miller PN F0103-T-250-J)	88.25

The Miller Series CFS-2 Fiber Stripper has "Super Comfort" grips. Ergonomically enhanced handles for extra comfort and ease of use. Factory set and locked calibration screw puck provides for better and more precise strips every time. Replacement for Clauss.

PART #	DESCRIPTION	PRICE
46107	Miller CFS-2 Stripper (Strips 250µm or 3mm)	\$26.95
81300	Miller CFS-3 Tri-Hole Stripper (Strips 250µm, 900µm, 3mm Jacket)	27.95

FIS FIBER OPTIC THERMAL STRIPPER (SINGLE FIBER)

The FIS Fiber Optic Thermal Stripper is engineered for speed and precision, this versatile stripping tool effortlessly removes 900µm or 250µm buffers from one or two fibers at a time—or even ribbon fiber—ensuring clean, accurate preparation for mechanical or fusion splicing. Ideal for both experienced professionals and new technicians, this tool simplifies fiber preparation with ease.

PART #	DESCRIPTION	PRICE
F1-9998	FIS Fiber Optic Thermal Stripper	\$295.00

TEMPO GRIP-STRIPPER

The multi-function fiber optic stripper from Tempo has five settings for stripping fiber optic cable. Strips outer jacket from 2.0-2.4mm cable, 2.8-3.0mm cable and 2.0-3.0mm loose tube buffer tubes. Strips 900µm buffer from loose buffer without removing acrylate coating. Strips buffer and acrylate from 900/125µm and 250/125µm fiber. Factory set and calibrated.

PART #	DESCRIPTION	PRICE
PA1171	ProGrip 5-in-1 Fiber Optic Stripper	\$53.75

MINILITE-STRIP™

The MiniLite-Strip™ is small and features a V-notch to remove buffer and coating from 125µm fiber. An additional larger V-notch removes a wide range of outer cable jackets.

PART #	DESCRIPTION	PRICE
45-352	MiniLite-Strip	\$69.95

MICRO-STRIP TOOL KIT

When working with optical fiber, you don't want your work to be compromised by accidentally damaging a fiber. The Fiber Optic Micro-Strip Tool Kit provides an easy and efficient way to strip fiber optic cable without nicking or damaging the optical fiber. Strips fiber buffers up to 900µm, and jackets up to 3.5 mm. Kit includes interchangeable/replaceable blades and tube guides.

PART #	DESCRIPTION	PRICE
MS-FOK1	Kit (10 blades for fiber range of 125µm to 900µm)	\$155.00
MS-1FS	Blade Holder	17.95
MS-1RB06S	Replacement Blade-Violet (Strips to 125µm)	41.45
MS-1RB12S	Replacement Blade-White (Strips to 250µm)	41.45
MS-1RB21S	Replacement Blade-Royal Blue (Strips to 500µm)	41.45

THERMAL FIBER OPTIC STRIPPER

The "Soft-Strip" Thermal Stripping Tool contains a heating element that softens and strips 900µm coatings. The thermal stripper permits precise stripping of these tough coatings with less than 1 lb. of peak pulling force for a single optical fiber. Excellent for use on fiber optic couplers and other delicate components. Uses two "AA" batteries, not included.

PART #	DESCRIPTION	PRICE
F1-9999	Thermal Fiber Stripper	\$195.00

RIPLEY®

WO-1224



WO-1224D



WO1224T

RIPLEY®

46107



81300



F1-9998



PA1171



45-352



MS-FOK1



F1-9999

RIPLEY MILLER SERIES FTS SERIES FIBER TUBE SCORERS

Precise, one-step buffer tube scorer. Fixed, hardened carbon steel blade requires no adjustments. FTS body comprised of strong & resilient acetal polymer. Precise jacket removal of PE, PVC and rubber jacket. (Note: FIS sells armor strippers separately.)

PART #	DESCRIPTION	PRICE
80990	FTS-005 (red), Tube size up to 2mm, wall thickness 0.13 to 0.25mm	\$15.50
80980	FTS (yellow), Tube size 1.6 to 6mm, wall thickness 0.229 to 0.381mm	15.50
80985	FTS-035 (blue), Tube size 1.6 to 6mm, wall thickness 1.0 to 1.3mm	15.50

BUFFER TUBE RINGER/SPLITTER

Buffer Tube Ringer/Stripper with adjustable blades can be set for any depth to help assure nick-free jacket entry. Use for simplex fiber and a variety of fiber optic cables up to 1/8 inch diameter. Loose tube fiber demands a precision tool capable of cutting different buffer tube diameters without nicking the enclosed fiber. Also available is the blue buffer tube stripper for cable from 1/8 inch to 7/32 inch.

PART #	DESCRIPTION	PRICE
F1-0017	Grey Buffer Tube Stripper (For Fiber/Coax Applications)	\$29.95
F1-0021	Blue Buffer Tube Stripper (For Fiber/Coax Applications)	23.95
F1-0018	Replacement Blades (1 Set of 4 Blades)	12.95

BIG BLUE CABLE RINGER

Strips round cable .250-.563 inches (6.4mm to 14.3mm) diameter. Adjustable blade, 1 or 2 step stripping, plus jacket slitting. .560 inch (14.22mm) blade spacing, rounded edge slitting blade included.

PART #	DESCRIPTION	PRICE
45164	Multicable Coax/Fiber Ringer Tool	\$55.95
L9226	Replacement Blade Set	16.75

RIPLEY MILLER SERIES ROUND CABLE SLITTERS

The Miller Series Round Cable Slitters are manually operated cutting devices designed for fast, safe and precise jacket removal of PE, PVC and rubber jacket. The F1-114 is designed to strip cables from 4.5mm to 29mm Diameter. The F1-158 is designed to strip cables from 19mm to 40mm Diameter.

PART #	DESCRIPTION	PRICE
F1-114	Round Cable Slitter (4.5mm to 29mm diameter)	\$46.50
F1-158	Round Cable Slitter (19mm to 40mm diameter) (not pictured)	83.50
F1-231	1 Replacement Blade	16.95

The Round Cable Slitter removes outer jackets and insulations from 4.5mm to 28.5mm O.D. Stripping action is both circumferential, then longitudinal for removal of insulation section at the end or mid-span of wires. Adjustable depth up to 3mm. Weight: 4.2oz, Dimensions: 135 x 40 x 15mm.

PART #	DESCRIPTION	PRICE
MK02	Round Cable Slitter	\$28.95
39391	Spherical Cutting Replacement Blades	20.95

TEMPO COMMUNICATIONS UNIVERSAL SLITTER

Slit/Strip/Remove 0.18" (4.5mm) - 0.984" (25mm) diameter 500-1200-MCM power/telecom round cables rubber/PVC/nylon insulation. For mid-point taps. Cable support arm, stainless steel blade.

PART #	DESCRIPTION	PRICE
PA1822	Tempo Communications Universal Slitter	\$36.95

OPTICAL FIBER SHEATH STRIPPER AND RING TOOL


Used for stripping and butting tight buffer optical fiber cables. Use one blade to butt PVC sheathing and use the second blade to strip the sheathing. Adjustable for .018" or .031" thick plastic, rubber or fabric insulation.

PART #	DESCRIPTION	PRICE
JIC-4366	Optical Fiber Sheath Stripper	\$62.95

ARMORED CABLE SLITTER AND CUTTER

This tool slits outer polyethylene jacket and armor in one operation. Performs longitudinal slitting and circumferential (ringing) for end stripping. Blade rotates 90° by activating blade lever, allowing easy mid-span preparation (ringing and splitting) – Replacement blades available. Sizes from 4-28.6mm OD.

PART #	DESCRIPTION	PRICE
F1-ACS	Armored Cable Slitter (8mm - 28.6mm cable OD's)	\$160.00
F1-ACS2	ACS-2 for smaller OD's (4mm - 10mm cable OD's)	166.95
F1-CB251K	Replacement Blade for F1-ACS and F1-ACS2	47.55
MB05-7000	ACS Plus Armored Cable Slitter (4 to 28.6 mm)	121.95

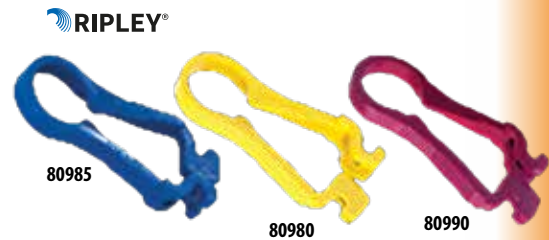

***Not for use with armored cable**



KEVLAR® CUTTERS

When cutting Kevlar®, you need a cutting tool with very durable blades. You also want the tool to cut cleanly, and to fit comfortably in your hand. FIS offers six Kevlar® cutters that fit the bill. The Kevlar® cutter, F1-KS1, features serrated blades and high leverage cutting, utilizing long cushioned handles. The Miller Kevlar® cutter, F1-9809, also features serrated blades and cushion handles.

PART #	DESCRIPTION	PRICE
F1-KS1	Miller Scissors (Carbon Molybdenum and Vanadium Steel Blade)	\$15.95
F1-6430	Kevlar- Cutters (Carbon Steel Blade)	31.25
F1-9809	Miller Kevlar® Cutters (Steel Blade) (Not Pictured)	21.95
KC699	Kevlar Scissor (Miller PN 46175) (Not Pictured)	15.95

RIPLEY MILLER SERIES SCISSORS/SPLICER KIT

Ergonomic snip for linemen and installers. One blade features ergonomically shaped, and cushioned palm rest.

PART	DESCRIPTION	PRICE
925CS-ERGO	Ergonomic Scissor/Splicer Snips	\$22.95
925CS	Traditional Serrated Scissor	17.95
925CS-KIT	Splicer's Kit	43.95

T-STYLE JACKET STRIPPER

The dual "V" notch blade allows the quick removal of outer jacket. Plier nose, along with cushion grips and spring release are additional features making this stripper comparable to the Ideal T-Type® Stripper.

PART #	DESCRIPTION	PRICE
1917SS	Greenlee Stripper, 16-26 AWG	18.95

US CONEC RIBBON STRIPPER

The US Conec Optical Cable Jacket Removal Tool eliminates the need for sharp tools such as Exacto® knives or razor blades for cable jacket removal. The tool is designed for quick, reliable, economical removal of PVC jacket from ribbon interconnect cable, 3mm round cable and 2 fiber zipcord.

PART #	DESCRIPTION	PRICE
F1-2009	US Conec Ribbon Stripper	\$26.95

US CONEC DISPOSABLE RIBBONIZERS

The disposable ribbonizing tool utilizes a quick cure cyanoacrylate adhesive to provide a low-cost, robust ribbonization option. This solution is ideal for applications requiring excessive handling and multi-row termination applications.

PART #	DESCRIPTION	PRICE
14316	US Conec Disposable Ribbonizer, 12F, White, 10+ uses	\$0.85
14682	Disposable Ribbonizer, 8F, Purple, 10+ uses	0.85
16764	Disposable Ribbonizer, 4F, Gray, 10+ uses	0.85

CORNING RIBBON SPLITTING TOOL

The tool closes around the ribbon fibers, as the ribbon settles into the proper slot. With actuator depressed, the tool slides along a length of the ribbon, separating the length of ribbon that is needed into smaller ribbon counts. The tool has slots to separate the ribbon into the following smaller ribbon counts: 2/2, 2/4, 2/6, 4/4, 2/10, 4/8, 6/6, and 12/12.

PART #	DESCRIPTION	PRICE
RST-000	Corning Ribbon Splitting Tool	\$1,695.95

AFL FAT-04 FIBER ARRANGEMENT TOOL RIBBONIZER

The FAT-04 features an easy-to-use fiber arrangement method utilizing linear travel. The FAT-04 includes a spare paste applicator to allow ribbon making to continue even if one of the paste applicators needs cleaning.

PART #	DESCRIPTION	PRICE
S010212	AFL FAT-04 Fiber Arrangement Tool Ribbonizer	\$504.00
S008622	FAA-03A ribbon-forming adhesive (0.5 liter bottle)	178.50
S008720	FAA-03A ribbon-forming adhesive (4 oz. dispensing bottle)	50.45

FITEL DE-RIBBONIZER

The S220A uses two finely positioned blades to shave the matrix off the top and bottom of ribbon fiber while leaving the individual fiber jackets untouched. After the matrix is removed, the fibers separate out easily by hand. For use with 300 and 400µm ribbons of 2 to 12 strands. Blade life is 1,000 separations.

PART #	DESCRIPTION	PRICE
S220A	Fitel De-Ribbonizer	\$657.00

RIBBON STRIPPING KIT

This unique thermal stripping kit includes the patented "Soft-Strip" thermal stripping system and contains components for stripping from 4 to 12-fiber ribbon of various constructions: 'Bonded', 'Encapsulated' or 'Ribbonized' types. AC adapter sold separately.

PART #	DESCRIPTION	PRICE
MS-SK-1	Ribbon Stripping Kit	\$575.35
MS-T3	120 Volt AC Adapter for Thermal Stripper	48.65



CORNING CABLE SYSTEMS MID-SPAN ACCESS TOOL

Cutting a buffer tube mid-span without damaging the optical fibers inside requires a specialized tool. Simply attach the tool and pull it along the buffer tube to slit the tube safely.

PART #	DESCRIPTION	PRICE
OFT-000	For 2.4mm - 3.0mm Tubes CCS Mid-Access Tool	\$400.00
OFT-001	Replacement Blade for OFT-000	60.45
UAT-3000	For 4.5mm - 22.0mm Tubes Enhanced Universal Access Tool	2,365.55
UAT3-BLADES	Replacement Blade for UAT-3000	240.00

RIPLEY MILLER SERIES MID-SPAN ACCESS TOOL

The Miller Series Mid-Span Access Tool (MSAT-5) is used to quickly and easily to access fibers in 1.9mm to 3mm buffer tubes in a mid-span location without damage to fiber. No blade adjustment is necessary.

PART #	DESCRIPTION	PRICE
MSAT-5	Mid-Span Access Tool	\$88.00
80935	Replacement Blade (5pk)	20.95

RIPLEY MILLER SERIES MID SPAN ACCESS TOOL

The new MSAT™ 16, an exciting new solution designed to easily access fibers in buffer tubes ranging from 1 to 3 mm diameters in mid-span applications.

PART #	DESCRIPTION	PRICE
MSAT16	Mid-Span Access Tool	\$99.00

RIPLEY MILLER SERIES MID-SPAN ACCESS TOOL

This tool can access fibers in 2.0mm, 2.5mm, and 3.0mm buffer tubes. Buffer tube size gauges are located on the tool body for ease of selecting proper tube slitting channel.

PART #	DESCRIPTION	PRICE
80785	Mid Span Tool	\$295.00

MID SPAN DROP CABLE SLITTERS

The Mid Span Slitters are designed to open fiber jackets and loose buffer tubes (1.2mm to 12mm) for easy fiber access.

PART #	DESCRIPTION	PRICE
MS-6	Mid Span Drop Cable Slitter, 1.2mm to 3.3mm	\$70.00
MS-26	Large Mid Span Drop Cable Slitter, 2.9mm to 6.8mm	79.95
MS-326	Micro Duct Fiber Cable Slit And Ring Tool	98.65
MS-426	Mid Span Slit & Ring Tool (5.8mm-12mm)	136.00

RIPLEY MILLER SERIES MSAT-X DUAL CHANNEL FIBER ACCESS TOOL

Our next-generation MSAT-X mid-span tool for MDU and FTx application allows technicians to safely and accurately shave cables of 1.9 - 5mm diameter.

PART #	DESCRIPTION	PRICE
MB10-7000	Dual Channel Fiber Access Tool	\$82.00

RIPLEY MILLER SERIES MB02 ALL PURPOSE CABLE SLITTER

The ergonomic and multi-purpose Miller® Series MB02 is a precision slitter designed to perform accurate ring and longitudinal cuts on various dielectric cables up to 0.60" (15.25 mm) in diameter.

PART #	DESCRIPTION	PRICE
MB02-7001	All Purpose Purpose Cable Slitter	\$104.00

AFL WRAPPING TUBE CABLE (WTC) CABLE ENTRY TOOL

This tool is designed to help efficiently open Wrapping Tube Cable in both end prep and mid sheath entry. The blade angle and tool shape help prevent the blade from cutting too deep.

PART #	DESCRIPTION	PRICE
CS014530	WTC Cable Entry Tool	\$160.00

RIPLEY MILLER SERIES FLAT DROP CABLE SLITTER

The unique articulating hinge allows accurate end and mid-span stripping without disassembling the tool -- simply close the tool over the cable and pull to slit the jacket. Included are two reversible blades plus two additional replacement blades stowed in tool.

PART #	DESCRIPTION	PRICE
MB04-7000	Flat Drop Slitter With 2 Installed Blades And 2 Spare Blades	\$41.25

DROP CABLE SLITTER

The FOD-2000 Fiber Optic Drop Cable Slitter is a patent pending tool that simplifies the slitting of drop cable jackets at the end of the cable or mid-span. The FOD-2000 puts a slit on both sides of the jacket allowing easy access to the fiber or strength member.

PART #	DESCRIPTION	PRICE
FOD-2000	Drop Cable Slitter	\$53.95
FOD-RB25	Replacement Blade for the FOD-2000 (Pack of 25)	44.95

DRAKA BUFFER TUBE ACCESS TOOL

This tool is designed for mid-span entry to fibers in a multiple of buffer tube sizes. The tool "shaves" only the tube wall to access the fibers providing safe, and reliable access. The tool kit includes interchangeable inserts supporting 2.5mm, 2.7mm and 3.0mm buffer tubes. **Includes:** Tool, Carry Case, Inserts, Spare Blade and Spare Head Screw

PART #	DESCRIPTION	PRICE
20021562	Buffer Tube Access Tool	\$1,140.00

Replacement Blades Are Available for All Mid-Span Access Tools.

Call your Sales Representative or go to www.fiberinstrumentsales.com to purchase.

CORNING



OFT-000



UAT-3000



MSAT-5



MSAT16



80785



MS-6



MS-426



MB02-7001

AFL



CS014530



MB10-7000



FOD-2000



MB04-7000



20021562

Draka



FIS DELUXE DIAMOND SCRIBE

Housed in a deluxe metal casing, The Deluxe Diamond Scribe offers a retractable 60° cone point.

PART #	DESCRIPTION	PRICE 1-5	PRICE 10+
WO-1223	FIS Deluxe Diamond Scribe	\$16.95	\$15.25



FIS ECONOMY DIAMOND SCRIBE

This Economy Scribe has a 60° cone point and is housed in a rugged white plastic housing.

PART #	DESCRIPTION	PRICE 1-5	PRICE 10+
F0-90-C	FIS Economy Diamond Scribe	\$8.25	\$7.85



FIS SAPPHIRE SCRIBE

For a wider cutting surface, this scribe offers a 90° wedge. Housed in a deluxe metal casing.

PART #	DESCRIPTION	PRICE
F0-90-S	FIS Sapphire Scribe	\$22.95



FIS 90° WEDGE DIAMOND SCRIBE

Provides a wider cutting surface. The 90° Wedge Diamond Scribe is packaged in a rugged blue plastic housing.

PART #	DESCRIPTION	PRICE
F0-90-W	FIS 90° Wedge Diamond Scribe	\$36.95



FIS CARBIDE SCRIBE

This Carbide Scribe offers a wide cutting surface in a plastic pen-like housing.

PART #	DESCRIPTION	PRICE
F1-9773	FIS Carbide Scribe	\$23.95



IDEAL SCRIBE TOOLS

All three Ideal Scribes offer 30° beveled DualScribe™ reversible blades doubling the tools' useful life. Non-slip grips offer precise control during scribing. Clear safety caps protect blades when not in use.

PART #	DESCRIPTION	PRICE
45358	Sapphire Blade DualScribe™ (blue handle)	\$39.95
45357	Ruby Blade DualScribe™ (red handle)	39.95
45359	Carbide Blade DualScribe™ (black handle)	61.95



FIS FIBER OPTIC CRIMP TOOLS

The FIS Crimp Tool is designed to successfully assemble a variety of connector styles for maximum optical performance and mechanical strength. This tool can be purchased as just a handle or with an included die for either SC/ST/FC or LC connectors. (Crimp tool die measurements are in inches)

PART #	DESCRIPTION	PRICE
F1-1302	FIS Crimp Tool Handle	\$35.00
F1-3227CR	FIS Crimp Tool Die and Handle SC/ST/FC (.128, .137, .190)	140.00



FIS CRIMP TOOL DIES

PART #	DESCRIPTION	PRICE
F1-3227F	FIS Crimp Tool Die (.128, .137, .190) (fit on FIS Crimp Tool F1-1302)	85.00
PA-2051	Triple Hex Die (.068, .128, .178)	45.00

ADDITIONAL CRIMP TOOLS

PART#	CONN. MFG	CONNECTOR TYPE	PRICE
6365CT	Corning Optical Communications	SC/FC	\$285.75
320103101	CCS	SC/ST/FC	255.00

FIS EYE LOUPE SET

Set includes 2X, 3X, 5X, 7X and 10X magnifications, these eye loupes allow users to make preliminary inspection of connector mating surfaces for dirt and scratches. The five piece set is made of durable lightweight plastic which makes it an excellent value.

PART #	DESCRIPTION	PRICE
98722	Eye Loupe Set	\$6.95



98722

RATCHETING CABLE CUTTERS

The Ratcheting Cutter is great for aluminum armor, not intended for ACSR. Cuts up to 35mm diameter.

PART #	DESCRIPTION	PRICE
F1-900759	Greenlee Fully Ratcheting Cable Cutter	\$335.00



F1-900759

HIGH LEVERAGE CABLE CUTTERS

This is a utility cable cutter for up to 70mm cable. This manual tool is great for standard power, coaxial, and non-armored cables.

PART #	DESCRIPTION	PRICE
F1-727	Greenlee Cable Cutters	\$38.95



F1-727

SIDE CUTTING PLIERS

The 6" side cutting pliers feature 1" cutting head for flush cutting, dual color cushioned handles and are manufactured of hardened steel.

PART #	DESCRIPTION	PRICE
0251-06D	Greenlee 6" Side Cutting Pliers	\$26.95



0251-06D

LINEMAN'S B SIDE CUT PLIERS

These pliers are high leverage for cutting bolts, nails, and many gauges of wire including high-strength wire. Cutting edges cut clean and remain sharp.

PART #	DESCRIPTION	PRICE
0151-08D	Greenlee 8" High Leverage Side Cutting Pliers	\$40.95



0151-08D

UTILITY KNIVES

PART #	DESCRIPTION	PRICE
065222	Greenlee 0652-22 8.9" Folding Utility Knife with Retractable 3-Position Serrated Blade, Silver/Green	\$20.75
0652-23	Greenlee Folding Utility Knife - High finish stainless steel handle with molded features for added comfort in rugged environments, 10 extra blades	29.95



065222

6" LONG NOSE SIDE CUTTING PLIERS

- Forged from chrome vanadium steel for greater durability and strength
- Cuts both solid and stranded copper wire
- Serrated jaws and laser-hardened cutting edges
- Through-hardened steel for longer life
- Rugged riveted construction for smooth precise action

PART #	DESCRIPTION	PRICE
0351-06M	Greenlee 6" Long Nose Side Cutting Pliers	\$25.95



0351-06M



F1-IRD5-36



F1-IRD5-35

FIS LASER SAFETY GLASSES

These high quality safety glasses employ superior laser safety lens technology. Laser protective dyes are molded into the plastic and will not scratch off, photobleach or degrade over time. The lenses protect from light wavelengths in the range of 800-1790nm. Glasses come with a protective carry case, lanyard and cleaning cloth. There are 2 styles to choose from: standard wrap-around and over-the-glasses. These are proudly made in the USA.

PART #	DESCRIPTION	PRICE
F1-IRD5-36	FIS Laser Safety Glasses, Over-The-Glasses Style, Adjustable Frames	\$126.95
F1-IRD5-35	FIS Laser Safety Glasses, Wrap-Around Style, Adjustable Frames	126.95



F1-SF1

808060

INSERTION/EXTRACTION TOOLS

The Fiber Optic Connector Insertion/Extraction Tools are capable of reaching into very tight spaces to perform tasks. They have been designed to work with virtually all rectangular or square cross-section connectors.

PART #	DESCRIPTION	PRICE
F1-SF1	Extraction Tool	\$58.95
808060	Miller Extraction Tool	37.95



FOC-100

FOCUS™ REMOVAL TOOL

The Focus™ removal tool from Cable Prep® inserts and removes SC and LC fiber optic connectors without disturbing adjacent connectors, even when working in densely populated panels.

PART #	DESCRIPTION	PRICE
FOC-100	Focus Removal Tool	\$58.95



PA1900

CAN WRENCH

- Strips PVC insulation, outer jacket of AWG22/4 and 24/4 telephone cable, insulation of AWG 22 (.34 mm2) and AWG 24 (.20 mm2) wire
- Durable shock-resistant design
- 3/8" (9.5 mm) and 7/16" (11 mm) hex sockets for accessing panels

PART #	DESCRIPTION	PRICE
PA1900	Can Wrench	\$16.95



0253-01C

7pc. NUT DRIVER / SCREW DRIVER SETS

The sets have rugged hollow shafts and heavy duty construction for longer life. Handles and shafts marked for easy identification of nut driver size.

Nut Driver Set Contains: 3/16", 1/4", 5/16", 11/32", 3/8", 7/16", and 1/2" Nut Drivers with 3" Shank

Screw Driver Set Contains: 3/16"x 4", 3/16"x6" and 1/4"x4" Cabinet Tips, 1/4"x4" and 5/16"x6" Keystone Tip, #1x3" and #2x4" Phillips Tip

PART #	DESCRIPTION	PRICE
0253-01C	7pc. Nut Driver Set	\$54.95



F1-0911DH

HEAT GUN

The FIS Heat Gun is designed to shrink splice protection sleeves or breakout kit shrink tube. The heat gun provides a variable temperature range adjustment, allowing the user to apply the required heat.

PART #	DESCRIPTION	PRICE
F1-0911DH	FIS Digital Heat Gun 110V	\$56.95



F1-5527

COLOR SHRINK TUBES

The 13mm and 26mm are quality shrink tubes that contain adhesive inside of the tubes (black tubes only). All shrink tubes have a shrink ratio of 2:1.

PART #	DESCRIPTION	PRICE
F1-5527-GN	Green Shrink Tube (3/16")	39¢ /ft
F1-5527-RD	Red Shrink Tube (3/16")	39¢ /ft
F1-5527-BL	Black Shrink Tube (3/16")	39¢ /ft
F1-5527-YE	Yellow Shrink Tube (3/16")	39¢ /ft
F1-5527-13A	13mm Black Adhesive Shrink Tube	\$1.00 /ft
F1-5527-26A	26mm Black Adhesive Shrink Tube	2.00 /ft

GREENLEE FISH POLES

Greenlee has the most innovative fishing systems designed to perform on the jobsite. Whether you're going a few short feet or through many walls and bends, having Greenlee's Fish Pole products on the jobsite will make the job easier for any commercial, industrial or utility application. These lightweight, durable poles are designed for both pushing and pulling cables and allow for use in cramped spaces.

PART #	DESCRIPTION	PRICE
540-15	Glo Stix Kit, 3/16" dia, (3) 5ft sections, 15 ft overall length	\$50.95
11427	Glo Stix's Replacement Section, 3/16" dia, (3) 5ft sections, 15 ft overall length	29.95
11426	Whisk Nose Tip	18.95
10497	Hook Nose Tip	13.75
10498	Bullet Nose Tip	10.95
FP12	12 Foot Fish Pole	98.95
FP18	18 Foot Fish Pole	148.00



CABLE CASTER

This hand held device enables installers to fire a dart with pull rope up to 50 ft. Monofilament line attached to the dart is projected out from a take-up reel on the Cable Caster. Pull strings or ropes can be attached to the monofilament line and reeled back to the installer.

PART #	DESCRIPTION	PRICE
F1-9112	Cable Caster Installation Tool	\$91.95
F1-6259	Cable Caster Darts (4 Pack)	10.99

FIS CABLE DISPENSER

Cable Dispenser locks into an open position on padded, anti-skid legs that can not collapse. A removable, 5/8" solid spindle, capable of holding over 200 lbs., allows for simple installation of cable reels up to 25" in diameter and 16" in width.

PART #	DESCRIPTION	PRICE
F1-6111	Cable Dispenser	\$240.00



F1-6111

FIS CABLE JETTER KIT

Microduct is an excellent way to physically protect fiber cable. Microduct also allows for the cable to be installed by air forcing or mechanically pushing the cable using the Cable Jetting equipment.

The Cable Jetter Kit is a complete kit enabling the user to air blow and mechanically push up to 3mm diameter fiber optic cable, to install 60-pound nylon line as a pull string, or as aid to install mule tape. Installation of cables up to 250' long can be easily achieved. The ability to mechanically push the cable helps move the cable past bends. Longer distances can be achieved with the nylon pull string line option. The portable 90 PSI compressor can be purchased as a kit, or you can use your air source; it is not recommended to exceed 80 PSI.

FEATURES

- Quick connect system to attach to 3/8" I.D. conduit
- Air hookup with air shutoff valve
- Nylon pull string spool holder
- Mechanical drive to push fiber thru conduit when needed

PART #	DESCRIPTION	PRICE
F1JETTERKIT	Cable Jetter Kit	\$895.00

FIS CABLE JETTER ACCESSORIES

PART #	DESCRIPTION	PRICE
F1JETTERC	6 Gal 165 PSI Compressor & 50ft Air Hose	\$235.00
F1JETTERFK6	Consumable refill kit (6 projectiles)	45.00
F1JETTERFK24	Consumable refill kit (24 projectiles)	175.00
KDI12101	Microduct – 3/8" I.D. – 1/2" O.D. (9.5mm - 12.7mm)	0.25/Mtr
JETTERFLREFILL	Nylon Pull String Refill	50.00



KIT CONTENTS

- Cable Jetter with Nylon Pull String
- Threaded Nozzle
- Quick Connect (2 Qty)
- Blowing Projectile (6 Qty)
- Pre-cut Nylon Pull String
- Mini Pulling Eye (6 Qty)

CABLE JETTER KIT



FIS FIBER OPTIC TIE WRAPS

It's easy for installers to over-cinch thin zip ties, resulting in macrobends that attenuate fiber optic cables. With copper cables, the weight of cables pressing against thin ties can damage or deform them enough to create crosstalk issues. To solve these problems, FIS created the Universal Cable Strap with Foam Padding. FIS Fiber Optic Tie Wraps are 1" wide and 12" long, and they are available in your choice of colors. Substitute "X" with color of your choice: AQ = Aqua, BK = Black, BL = Blue, GR = Green, OR = Orange, and YE = Yellow.

PART #	DESCRIPTION	PRICE
FOTW-X-6	Tie Wrap with Foam Padding (Pack of 6)	\$9.25
FOTW-X-50	Tie Wrap with Foam Padding (Pack of 50)	75.95
FOTW-X-100	Tie Wrap with Foam Padding (Pack of 100)	150.00

FIS BASIC FIBER OPTIC TIE WRAPS

The FIS Basic Fiber Optic Tie Wrap is just like the current FIS Fiber Optic Tie Wrap offer, but without the padding. It is designed for communications cable with the wide design profile and reusable nature. FIS Basic Tie Wraps are 1" wide and 12" long, and they are available in your choice of colors. Substitute "X" with color of your choice: AQ = Aqua, BK = Black, BL = Blue, GR = Green, OR = Orange, and YE = Yellow.

PART #	DESCRIPTION	PRICE
BTW-X-6	Basic Tie Wrap (Pack of 6)	\$4.75
BTW-X-50	Basic Tie Wrap (Pack of 50)	38.95
BTW-X-100	Basic Tie Wrap (Pack of 100)	75.25

VELCRO® Brand ROLL

This VELCRO® Brand Roll dispenses just like a tape roll and can be cut to the desired length. The center core of the roll has a male/female Velcro patch attached, which enables the roll to be affixed to any ladder or steel surface for convenient dispensing.

PART #	DESCRIPTION	PRICE
F1-VROLL	75' Velcro® Brand Roll 3/4" Black with Center Core	\$26.95

HOOK AND LOOP FASTENER TIE WRAP

Protect your Fiber Optic and Category cable from over cinching with tie wraps. These low-cost wraps are reusable and are available in red and black. Now provided with cutout for screw mount support.

PART #	DESCRIPTION	PRICE
CT733	Red Tie Wrap 1"x 8" (75 pk)	\$28.00
CT255	Black Tie Wrap 1"x 8" (75 pk)	28.00
CT-3105	Black Tie Wrap 3/4" x 5" (25 pk)	9.95
CT-3108	Black Tie Wrap 1"x 8" (25 pk)	9.95
CT-3012	Black Tie Wrap 1"x 12" (25 pk)	15.00

CONNECTOR AND CABLE CLAMPS

The ability to secure a connector or cable to a desired location is possible with this adhesive backed clamp. Re-enterable and adjustable up to 5/8".

PART #	DESCRIPTION	PRICE
F1-6209	Connector and Cable Clamps	.40¢
F1-13187	Cable Holder (package of 10)	\$6.95

EXPANDABLE FIBER BRACKET

Designed to hold up to six 3.0mm fiber optic cables, this bracket provides expansion capabilities to fiber optic systems. Made from flame retardant nylon, cables snap into grooves without damaging the fiber.

PART #	DESCRIPTION	PRICE
F1-9124	Expandable Fiber Bracket (Package of 10)	\$3.75

TIE WRAPS

Available from FIS are two sizes of tie wraps. The 4" long by 1/8" wide wrap is excellent for securing simplex or duplex cable. The 7" long by 3/16" wide wrap is designed to handle wrap diameters up to 1-1/4".

PART #	DESCRIPTION	PRICE
T18S	4" Tie Wraps (100 pk)	\$2.25
T50S	7" Tie Wraps (100 pk)	3.25

CABLE CLAMPS

Use the Cable Clamp to organize copper or fiber cords and bulk cable. These clamps are available in 2 sizes: small (holding up to 1" in diameter), and large (up to 3").

PART #	DESCRIPTION	PRICE
CCS-0601	Small Cable Clamp (color red)	\$1.25
CCS-0201	Large Cable Clamp (color blue)	2.25



F1-VROLL



CT255

CT733

Connector and Cable Clamps



F1-6209



F1-9124

Expandable Fiber Bracket



T18S

CCS-0601



CCS-0201

FIBERGLASS 3-RAIL MARKING POSTS

PART#	DESCRIPTION	PRICE
FR72C-OX	72" Orange, Fiberglass 3-Rail, PolyTech Coating (A)	\$39.10
FR72-OX	72" Orange, Fiberglass 3-Rail, SUNCOAT (A)	34.86
GD8-1324	Generic FO Decal (1 or 2) Decals Per Post, 811 Version	2.15 / 4.30

RhinoDome™ MARKING POSTS & TEST STATIONS (Call for Quotes Over 100+)

PART#	DESCRIPTION	PRICE
RDR66WO-FIBER-811	66" RhinoDome with White Base, Caution Buried Fiber Optic - 811 (B)	\$19.29
RDR72WO-FIBER-811	72" RhinoDome with White Base, Caution Buried Fiber Optic - 811 (B)	20.71
RDR78WO-FIBER-811	78" RhinoDome with White Base, Caution Buried Fiber Optic - 811 (B)	22.14
RDR84WO-FIBER-811	84" RhinoDome with White Base, Caution Buried Fiber Optic - 811 (B)	23.57
RDR90WO-FIBER-811	90" RhinoDome with White Base, Caution Buried Fiber Optic - 811 (B)	25.00
RDR96WO-FIBER-811	96" RhinoDome with White Base, Caution Buried Fiber Optic - 811 (B)	26.43
RDR66WO-TS-FIBER 811	66" RhinoDome with White Base with 5 Term Test Station, Caution Buried Fiber Optic - 811 (C)	41.43
RDR72WO-TS-FIBER 811	72" RhinoDome with White Base with 5 Term Test Station, Caution Buried Fiber Optic - 811 (C)	42.86
RDR78WO-TS-FIBER 811	78" RhinoDome with White Base with 5 Term Test Station, Caution Buried Fiber Optic - 811 (C)	44.29
RDR84WO-TS-FIBER 811	84" RhinoDome with White Base with 5 Term Test Station, Caution Buried Fiber Optic - 811 (C)	45.71
RDR90WO-TS-FIBER 811	90" RhinoDome with White Base with 5 Term Test Station, Caution Buried Fiber Optic - 811 (C)	47.14
RDR96WO-TS-FIBER 811	96" RhinoDome with White Base with 5 Term Test Station, Caution Buried Fiber Optic - 811 (C)	48.57

TriView® MARKING POSTS & TEST STATIONS (Call for Quotes Over 100+ / 2-Term Test Station Available)

PART#	DESCRIPTION	PRICE
TVF48XX	48" TriView (D)	\$23.31
TVF54XX	54" TriView (D)	24.53
TVF60XX	60" TriView (D)	25.74
TVF66XX	66" TriView (D)	26.96
TVF72OB	72" TriView Marker, Orange Post w/Black Cap (D)	28.17
TVF78XX	78" TriView (D)	29.39
TVF84XX	84" TriView (D)	30.60
TVF90XX	90" TriView (D)	\$31.81
TVT1720B5	72" Orange Base with Black Cap, TriView 5-Term Test Station (E)	49.06
GD8-1324	(3) Decals per Post, 811 Version	4.30 / 12.90

MARKING POST & TEST STATION ACCESSORIES

PART#	DESCRIPTION	PRICE
PHD-100-A	Flat Post Pilot Hole Driver (F)	\$350.00
RHD-44-A	Universal Flat Post Driver (G)	228.57
TVAD-300HD	TriView Soil Anchor Driver (Sold Separately) (H)	471.43
TVFA	TriView Soil Anchor (Sold Separately) (I)	19.79
DOME TS INSERT-6300	Grounded Locate Plate - Added to RhinoDome Test Station (J)	23.57
EM6300-EXT-KIT-RMS	Grounded Locate Plate (Sold Separately) (J)	31.43
DOME TS INSERT-9125	Isolation Lever - Added to RhinoDome Test Station (K)	44.79
EM9125-OR	Isolation Lever (Sold Separately) (K)	50.29
DOME TS INSERT-ISOST	Iso-Switch - Added to RhinoDome Test Station (L)	30.71
ISOST-HH	Iso-Switch (Sold Separately) (L)	32.14
TS-SHUNT	Shunt for Test Stations (M)	0.12
DOME-TS-LOCK	Factory Installed Caplock for Vandalism Protection on RhinoDome Test Stations (N)	4.14
	2-7/8" x 14-16" Decal - Added to Post	2.14
	2-7/8" x 17-18" Decal - Added to Post	2.29
TVPFN38-W	Drive Rivet (Sold Separately)	0.73
UCG1-72	72" Green U-Channel Post (Sold Separately)	33.51

TRACER WIRE (Call for Solid Copper Price)

PART#	DESCRIPTION	PRICE
744110647	14 AWG High Flex Copper Clad Steel (HF-CCS) PE30 ORANGE 2500'	\$210.90
744120647	12 AWG High Flex Copper Clad Steel (HF-CCS) PE30 ORANGE 2500'	307.21
745110647	14 AWG High Strength Copper Clad Steel (HS-CCS) PE30 ORANGE 2500'	233.14
745120647	12 AWG High Strength Copper Clad Steel (HS-CCS) PE30 ORANGE 2500'	341.07
746410647	14 AWG Horizontal Directional Drilling (HDD-CCS) PE45 ORANGE 2500'	335.86
746420647	12 AWG Horizontal Directional Drilling (HDD-CCS) PE45 ORANGE 2500'	487.50





DURABLE WIRE CONNECTORS

PART#	DESCRIPTION	PRICE
TL-LUG-SS	Tracer-Lock® 3-Way Connector w/Service Tap (A)	\$6.31
LBC12	Locking Barrel Connector AWG IDC 12 Gauge (B)	7.14
LBC14	Locking Barrel Connector AWG IDC 14 Gauge (B)	8.36

GROUND RODS & CLAMP

PART#	DESCRIPTION	PRICE
GRCC-1205	1/2" x 5' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed (C)	\$13.44
GRCC-1208L	1/2" x 8' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed (UL) (C)	25.07
GRCC-5805	5/8" x 5' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed (C)	15.81
GRCC-5806	5/8" x 6' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed (C)	17.03
GRCC-5808L	5/8" x 8' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed (UL) (C)	26.00
GRCC-5808L13	5/8" x 8' Copper Clad Steel (CCS) Ground Rod 13 MIL Pointed (UL/RUS) (C)	29.06
GRCC-5810L	5/8" x 10' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed (UL) (C)	32.23
GRCC-5808L13	5/8" x 10' Copper Clad Steel (CCS) Ground Rod 13 MIL Pointed (UL/RUS) (C)	37.81
GRCC-3408L	3/4" x 8' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed (UL) (C)	37.40
GRCC-3410L	3/4" x 10' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed (UL) (C)	45.36
GRCC-T5808L	5/8" x 8' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed & Threaded (UL) (D)	26.84
GRCC-T5810L	5/8" x 10' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed & Threaded (UL) (D)	32.76
GRCC-T3408L	3/4" x 8' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed & Threaded (UL) (D)	39.37
GRCC-T3410L	3/4" x 10' Copper Clad Steel (CCS) Ground Rod 10 MIL Pointed & Threaded (UL) (D)	46.54
GRC-SD58L	1/2"-5/8" GR Rod Bronze Clamp SD #10-2 Cable (UL) 100pc/box (E)	2.46

Tug-Tape™ (PULL TAPE)

PART#	DESCRIPTION	PRICE
PT1250-3000	Tug-Tape 1/2" x 3,000' Reel, 1,800 lbs Tensile Strength (F)	\$101.77
PT1250-5000	Tug-Tape 1/2" x 5,000' Reel, 1,800 lbs Tensile Strength (F)	169.63
PT1800-3000	Tug-Tape 5/8" x 3,000' Reel, 2,600 lbs Tensile Strength (G)	130.40
PT1800-5000	Tug-Tape 5/8" x 5,000' Reel, 2,600 lbs Tensile Strength (G)	217.33
PT2500-1500	Tug-Tape 3/4" x 1,500' Reel, 3,300 lbs Tensile Strength (H)	82.37
PT2500-1800	Tug-Tape 3/4" x 1,800' Reel, 3,300 lbs Tensile Strength (H)	98.86
PT2500-3000	Tug-Tape 3/4" x 3,000' Reel, 3,300 lbs Tensile Strength (H)	164.76
PT2500-5000	Tug-Tape 3/4" x 5,000' Reel, 3,300 lbs Tensile Strength (H)	274.59

MARKING FLAGS

PART#	DESCRIPTION	QTY	PRICE
45210	4" X 5" Orange Flag, 21" Wire Staff	10 Bundles of 100 Flags	\$72.76

LABELS & TAGS

PART#	DESCRIPTION	QTY	PRICE
REF10-	Reflective Numbers & Letters, 1"X1.5", Black on Orange (I)	25/Pack	\$6.43
E1	Pole Marking Tags, Embossed Aluminum, 1" Character, Black on Yellow, Horizontal Mount (J)	100/Pack	22.86
VE10-	Pole Marking Tags, Embossed Aluminum, 1" Character, Black on Yellow, Vertical Mount (K)	100/Pack	22.86
ATC-(##)-1	Pole Marking Channel Holders, Aluminum, for 1" Tags, Holds (##) Tags (L)		Call for Quote
PTC-(##)-1	Pole Marking Channel Holders, Poly, for 1" Tags, Holds (##) Tags (M)		Call for Quote

BARRICADE TAPE (Other Legends Available. Minimum Qty of 150 Rolls)

PART#	DESCRIPTION	PRICE
B3103Y16	Stock, 3" / 1000' / 3 mil, CAUTION, Made in U.S.A. (N)	\$14.56
SB3103Y16	3" / 1000' / 3 mil, CAUTION	8.63
B3103R21	Stock, 3" / 1000' / 3 mil, DANGER, Made in U.S.A. (O)	14.56
SB3103R21	3" / 1000' / 3 mil, DANGER	8.63

UNDERGROUND WARNING TAPE (Minimum Qty of 150 Rolls)

PART#	DESCRIPTION	PRICE
B3604051	Custom, 3" / 6000' / 4 mil, Non-Detectable, Caution Buried Fiber Optic Line Below w/ No Dig Symbol (P)	\$121.54
B3104051	Custom, 3" / 1000' / 4 mil, Non-Detectable, Caution Buried Fiber Optic Line Below w/ No Dig Symbol (P)	20.26
CUSTOM	Customization Available for Barricade & Underground Tape	Call for Quote

FIS PORTABLE TABLE

These tables are perfect for splicing and terminating fiber optic cable. Tables weigh approximately 15-25lbs. The Work Table Kit is sold separately and includes a lamp (110VAC), magnifier, and universal clamp. Carrying Case sold separately.

PART #	DESCRIPTION	PRICE
F1-CT36	Work Table (22"x28")	\$565.35
F1-CT53	Work Table (22"x44")	875.00
F1-CT70	Work Table (22"x58")	985.00
FIS-AK	Work Table Kit (see description above)	610.00
CL400	Carrying Case	155.00



F1-CT36

FIS SPLICE TENTS

Splice tents for outside field applications are made of tough urethane coated polyester fabric. FIS offers the standard splice tents and the new Space Saver splice tents. Space Savers have approximately 25% shorter folded length for storage and can be set over a cable or pipe.

PART #	DESCRIPTION	PRICE
F1-97976GF	FIS Tent (6'L x 6'W x 6'8"H) with floor	\$985.00
F1-97978GF	FIS Tent (8'L x 8'W x 7'8"H) with floor	1,224.95
F1-97976GS	FIS Space Saver Tent (6'L x 6'W x 6'8"H) without floor	795.00
F1-97978GS	FIS Space Saver Tent (8'L x 8'W x 7'8"H) without floor	1,300.00
F1-979710GS	FIS Space Saver Tent (10'L x 8'W x 8'4"H) without floor	1,379.25



F1-97976GF

TEMPO COMMUNICATIONS TRACKER II CABLE LOCATOR

With its inductive signal application, the Tracker II can be used on active or dead systems. Now you can trace the path and determine the depth of wires and metallic pipes without having to deactivate the systems. High frequency transmitter provides range up to 4000 feet (1219 m) and depths to 7 ft. (2 m). The transmitter offers three methods of connection: direct, inductive coupler, or inductive antenna.

PART #	DESCRIPTION	PRICE
501	Cable Locator TRACKER II	\$760.00



501

TEMPO MARKER-MATE

Marker-Mate™ Electronic Marker Locator is designed to locate all brands of buried, electronic markers, including the patented Tempo Omni Marker™, and Uni Marker™. This locator sets an industry standard with the capability of detecting all seven application-based electronic marker types simultaneously (power, water, sanitary, telephone, gas, cable TV, non-potable water.) Marker disks available.

PART #	DESCRIPTION	PRICE
EML100	Marker Mate	\$1,125.00



EML100

U-TECK

Fiber Optic Splicing Workstation

The U-TECK Fiber Optic Splicing Workstation was designed for, and dedicated to, today's professional fiber splicer.

The NEW Workstation offers twice the work space area compared to standard use tables, yet is light-weight and easy to store! The table top even has a molded recess area to keep items from falling. Also molded into the outside frame of the table are several recess areas that can be used to securely hold alcohol, wipes and fiber splicing sleeves.

U-TECK WORKSTATION

PART #	DESCRIPTION	PRICE
F1-55701	Workstation w/ cable management bracket (includes floor stand and two stand-off props with adjustable webbing)	\$495.00
F1-55706	Workstation w/ cable management bracket and floor stand only	300.00

U-TECK WORKSTATION ACCESSORIES

PART #	DESCRIPTION	PRICE
F1-55715	Aerial Strand Cables	\$100.95
F1-55615	LED Light and Magnifier	123.75
F1-55710	Mesh Bag	60.00
F1-55725	Splice Tray Holder	79.95
F1-55720	Tablet Holder	136.55
F1-55730	Cable Management Bracket	10.95
F1-55711	Wall Stand-offs	215.00



AERIAL STRAND CABLES




LED LIGHT AND MAGNIFIER




MESH BAG



SPLICE TRAY HOLDER





TABLET HOLDER



CABLE MANAGEMENT BRACKET



WALL STAND OFFS

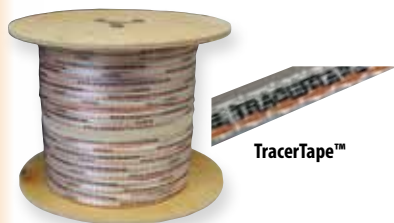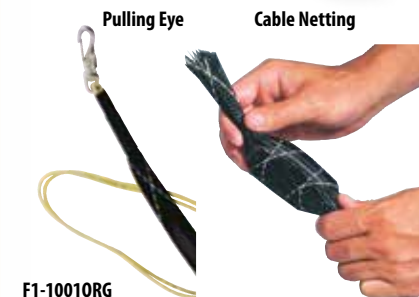

INNERDUCT

Fiber Instrument Sales distributes an Innerduct product line consisting of corrugated HDPE, riser rated PVC and plenum rated PVDF Innerduct in a variety of colors and sizes. A full line of fittings and accessories that complement the product line are available as well. The plenum and riser product lines are both UL 2024 listed and are among the most flexible flame-rated Innerduct products on the market. The HDPE outside plant products offer high tensile strength while being impervious to abrasion, scouring and root penetration. **Innerduct available in 250 and 500 foot coils.**

HDPE CORRUGATED INNERDUCT - OUTDOOR RATED

PART #	DESCRIPTION	OUT. DIA.	IN. DIA.	PRICE
F1-14383P250	Single-Wall Orange with 900 lb. Pull Tape -250ft	1.35"	1.049"	\$185.00/Coil
F1-14383P500	Single-Wall Orange with 900 lb. Pull Tape -500ft	1.35"	1.049"	365.00/Coil
F1-14383SP250	Split HDPE Orange -250ft	1.35"	1.049"	196.00/Coil
F1-14383SP500	Split HDPE Orange -500ft	1.35"	1.049"	365.00/Coil

INDOOR RATED INNERDUCT

PART #	DESCRIPTION	OUT. DIA.	IN. DIA.	PRICE
F1-14363P250	Riser Rated Orange with 900 lb. Pull Tape -250ft	1.35"	1.049"	\$235.75/Coil
F1-14363P500	Riser Rated Orange with 900 lb. Pull Tape -500ft	1.35"	1.049"	423.00/Coil
F1-11437P250	Plenum Rated Orange with 900 lb. Pull Tape -250ft	1.35"	1.049"	615.00/Coil
F1-11437P500	Plenum Rated Orange with 900 lb. Pull Tape -500ft	1.35"	1.049"	1,230.00/Coil

INNERDUCT CUTTERS

PART #	DESCRIPTION	PRICE
F1-SL200	Innerduct Cutters - Will Cut Diameters 1/2" to 1.5"	\$39.95

INNERDUCT COUPLING

PART #	DESCRIPTION	PRICE
PCCP-100	Innerduct Coupling 1 1/4" to connect two smaller pieces	\$14.50

FIS FIBER OPTIC PULLING EYE AND CABLE NETTING

The FIS pulling eye will protect connectors while providing a pulling point with properly distributed tensions on cable assemblies. Available as a stand-alone component or installed by FIS on your custom cable assembly. The pulling eye has a rotating end clip to minimize cable twisting and the connectors are protected with cable netting.

PART #	DESCRIPTION	PRICE
F1-1001	FIS Pulling Eye Kit for Multifibers Yellow	\$16.75
F1-1001ORG	FIS Pulling Eye Kit for Multifibers Orange	16.75
F1-1001BR	FIS Pulling Eye Kit for Simplex and Duplex	10.95
F1-1001A	Pulling Eye Installed by FIS	21.95
F1-570038BLK	Cable Netting Expandable Sleeve 3/8" (Fits 3/16" - 5/8")	.35¢/ft
F1-570050BLK	Cable Netting Expandable Sleeve 1/2" (Fits 1/4" - 3/4")	.45¢/ft
F1-5700	Cable Netting Expandable Sleeve 3/4" (Fits 1/2" - 1 1/4")	.99¢/ft

CABLE PULLING LUBRICANT

Polywater CGL Lubricant is a high performance gel lubricant for fiber optic, copper or coaxial cable pulls. It clings to cable for long distance horizontal pulls. The lubricant is compatible with PE and LSZH communication cable jackets. UL listed.

PART #	DESCRIPTION	PRICE
CGL-35	1 Quart Squeeze Bottle Polywater Lubricant CGL	\$12.95
CGL-128	1 Gallon Bucket Polywater Lubricant CGL	35.00
CGL-640	5 Gallon Bucket Polywater Lubricant CGL	124.95

POLYWATER FTX LUBRICANT

High Performance concentrated silicone lubricant that is fast drying to eliminate the "insertion loss" effect on data cables. Sprays easily in a stream to reduce mess during installation. Dries fast at the receiving side for quick splice or termination. Effective for fabric woven innerduct applications

PART #	DESCRIPTION	PRICE
FTX35LR	1 quart Spray Bottle Polywater Lubricant FTX	\$20.95

TRACERTAPE™

TracerTape™ is a functional product that is used for locating, pulling and measuring your duct and fiber. The TracerTape incorporates a solid corrosion resistant copper conductor which provides easy detection. Call for double wire tracer tape.


PART #	DESCRIPTION	TENSILE/LBS.	PRICE
WPT1250	3,000 ft. Single Wire Reel	1,250 lbs.	\$255.75

GREENLEE PULLING LINES

Greenlee 595 Nylon Fish Line is strong, and lightweight. It is center feed for fast payout without tangling and is mildew-resistant. It can be pulled into the run with the wire to provide a means to add wires later. Greenlee 430 Poly Line is ready-to-use, pre-punched hole in lid with resealable cap. Can be used with power fishing systems directly from the container. It resists tangling when dispensing. It is rot and mildew resistant.

PART #	DESCRIPTION	PRICE
430	6,500' Poly Line	\$96.95
430-500	500' Poly Line	16.95

FIS BOBTAIL CONNECTOR




CLEAVE



LOAD IN HOLDER



LOAD FIBER



SLIDE FIBER INTO
CONNECTOR and MAKE
CONNECTION



EPOXY FIBER
INTO PLACE


THE 2 MINUTE CONNECTION

SATISFACTION GUARANTEED

FIS BOBTAIL™ NO-POLISH CONNECTOR (No Fiber Polishing Required)

FIS Bobtail Connectors provide a pre-polished, quick termination style connector for an industry leading value. Bobtail's are ideal for many applications including, but not limited to, local area networks, restoration work, testing applications, and laboratory settings. The open epoxy canal allows application of Super Glue or any Cyanoacrylate adhesives. As always, your satisfaction is guaranteed or return the connectors to FIS for a complete refund.

PART #	DESCRIPTION	BOOT SIZE	PRICE
F1-0066-BT	Bobtail ST Pre-polished Connector - 62.5µm (OM1)	900µm	\$5.35
F1-006650-BT	Bobtail ST Pre-polished Connector - 50µm (OM2)	900µm	5.35
F1-0069-BT	Bobtail ST Pre-polished Connector - Singlemode	900µm	5.95
F1-5066-BT	Bobtail LC Pre-polished Connector - 62.5µm (OM1)	900µm	5.95
F1-506650-BT	Bobtail LC Pre-polished Connector - 50µm (OM2)	900µm	5.95
F1-5069-BT	Bobtail LC Pre-polished Connector - Singlemode	900µm	6.95
F1-3066-BT	Bobtail SC Pre-polished Connector - 62.5µm (OM1)	900µm	4.95
F1-306650-BT	Bobtail SC Pre-polished Connector - 50µm (OM2)	900µm	4.95
F1-3069-BT	Bobtail SC Pre-polished Connector - Singlemode	900µm	5.95

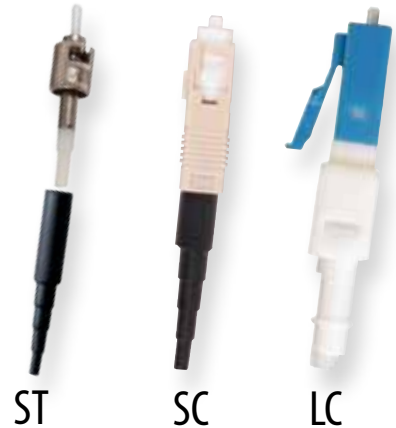

ST

SC

LC

FIS BOBTAIL™ PULL FORCE (LBS.) VS. COMPETITION

	Connector A (leading competitor)	Connector B (leading competitor)	Bobtail™ Connector
Test #1	.6*	1.7	1.7
Test #2	.5*	1.8	1.3
Test #3	.4	1.8	1.2
Test #4	.5	2.1	1.9
Test #5	1.0*	1.3	2.1
Test #6	.8	1.6	2.3
	.6 lbs. average	1.71 lbs. average	1.75 lbs. average

* Connector broke off fiber



CAUTION:

FIS discourages the use of the Bobtail or any mechanical splice style connector in 10 G network systems.


SEE ONLINE VIDEO:

www.fiberinstrumentsales.com/information/fis-tv-videos/bobtail-connector

FIS UNIVERSAL SLIDING BOBTAIL HOLDER

The FIS assembly tool is now designed with a precision machined sled to aid in the insertion of the prepared field fiber. This feature virtually eliminates fiber stub breakage and minimizes insertion loss. Includes adapter plates for SC, LC, and ST Bobtail Connectors.

PART #	DESCRIPTION	PRICE
F1-00SUNBTH	FIS Universal Sliding Bobtail Holder	\$155.00

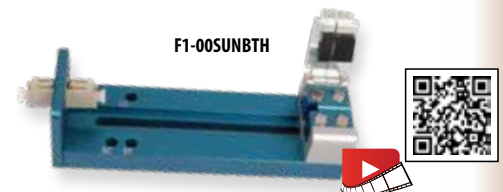

CYANOACRYLATE ADHESIVE FOR BOBTAIL CONNECTORS

This quick set cyanoacrylate adhesive is provided for terminating FIS Bobtail connectors. An accelerant provides even faster cure time, less than 60 seconds.

PART #	DESCRIPTION	PRICE
F1BTXY	Two Part Epoxy for Bobtail Connector	\$33.95

F1BTXY



CORNING

25 PACKS
AVAILABLE



TKT-UNICAM-PFC

UNICAM® PRETIUM™ PRE-POLISHED CONNECTOR AND TOOL KIT (No Fiber Polishing Required)

The UniCam® Pretium™ Tool Kit can quickly install a UniCam Connector in about 45 seconds. From the cleaver, with its integrated fiber scrap bin and dual-clamp precision hold, to the installation tool with its immediate go/no-go feedback signal, the UniCam® Pretium™ Tool Kit was thoughtfully designed with the needs of network installers in mind.

DESCRIPTION	PART #
Trash Container	2104498-01
Scissors	100294-01
Black Permanent Marker	2104499-01
Fiber Optic Cleaning Fluid	*
Fiber Wipes	*
Pretium Cleaver	FBC-007
Pretium UniCam Installation Tool	TL-UCP
Cable Jacket Stripping Tool	3206001-01
Dual-Hole Stripping Tool	2104502-01
1.25 mm Ferrule Adapter	VFL-A125
UniCam Crimp Tool	3201007-01
Lanyards (2)	02-002853-001
Cleaning Stick - Size 2.5 mm	*
2.5 mm Ferrule Adapter (with Installation Tool)	VFL-250

CONNECTORS AND ACCESSORIES

PART #	STYLE	TYPE	FERRULE	TYPICAL LOSS	PRICE	PART #	STYLE	TYPE	FERRULE	TYPICAL LOSS	PRICE
95-000-50	ST	MM, 62.5/125µm	Composite	.3dB	\$12.50	95-050-41	SC	MM, 50/125µm	Zirconia	.3dB	\$16.50
95-050-51	ST	MM, 50/125µm	Zirconia	.3dB	16.50	95-050-41X	SC	MM, OM3 10G	Zirconia	.3dB	15.95
95-000-51	ST	MM, 62.5/125µm	Zirconia	.3dB	15.50	95-000-99	LC	MM, 62.5/125µm	Zirconia	.3dB	14.95
95-200-51	ST	SM, 8.3/125µm	Zirconia	.4dB	17.95	95-050-99	LC	MM, 50/125µm	Zirconia	.3dB	16.95
95-000-41	SC	MM, 62.5/125µm	Zirconia	.3dB	15.50	95-200-99	LC	SM, 8.3/125µm	Zirconia	.3dB	17.50
95-200-41	SC	SM, 8.3/125µm	Zirconia	.4dB	17.50	95-050-99X	LC	MM, OM3 10G	Zirconia	.3dB	14.95
95-000-40	SC	MM, 62.5/125µm	Composite	.3dB	12.25	TL-UC-01		Universal UniCam Installation Tool			565.00

CORNING

NEW

25 PACKS
AVAILABLE



OPTISNAP™ HIGH-PERFORMANCE CONNECTOR TOOLKIT WITH FLAT CLEAVER

(NO FIBER Polishing Required)

With proven field-installable connector technology, fiber terminations using the OptiSnap™ connector system are fast, easy and reliable. Corning high-precision mechanical splice technology enables fiber optic networks to be installed quickly and cost effectively. The Corning go/no-go feedback signal allows the installer to verify that the installation is performed right the first time, every time. Insert the fiber, activate the cam and watch the pass/fail light illuminate, instilling confidence in every connector installed. The factory-polished ceramic ferrule provides superior quality for end-face geometry. The singlemode OptiSnap™ Connector is available in an ultra physical contact (UPC) polish or an angled physical contact (APC) polish, offering you a higher grade of performance for your field terminations. With fast installation time and low insertion loss, the OptiSnap Connector system provides a good alternative to fusion splicing. Installation is as easy as strip, clean, cleave, cam and crimp.

PART#	DESCRIPTION	PRICE
TKT-OPTISNAP-CF	OptiSnap® Connector Installation Tool Kit with Flat Cleaver includes installation tool, all required fiber preparation and cleaning supplies in a gray case	\$2,400.00

CONNECTORS AND ACCESSORIES

PART #	STYLE	TYPE	FERRULE	TYPICAL LOSS	PRICE
OSNP-SCA-250-Z	SC	SM APC, 250µm	Ceramic	.3dB	\$565.50
OSNP-SCU-250-Z	SC	SM UPC, 250µm	Ceramic	.2dB	553.75
OSNP-SCU-900-Z	SC	SM UPC, 900µm	Ceramic	.2dB	503.40
OSNP-STU-900-Z	ST	SM UPC, 900µm	Ceramic	.2dB	470.00
OSNP-LCA-900-Z	LC	SM APC, 900µm	Ceramic	.3dB	525.00
OSNP-LCU-900-Z	LC	SM UPC, 900µm	Ceramic	.2dB	522.75
OSNP-SCA-900-Z	SC	SM APC, 900µm	Ceramic	.3dB	541.00

DESCRIPTION	PART #
High-Performance Precision Flat Cleaver with diamond blade and fiber handlers	FBC-009
Replacement diamond blade for the high-performance flat cleaver, for FBC-007 and FBC-015 flat cleavers	FBC-14-15-16-BLADE
LC 1.25 mm VFL Ferrule Adapter	VFL-A125
Standard Ferrule 2.5 mm VFL Adapter	VFL-A250
LC 1.25 mm VFL Ferrule Adapter Kit	VFL-AKIT
1.5 mm Ferrule Cleaning Sticks	CLEAN-STICKS-125
SC and ST® compatible 2.5 mm Ferrule Cleaning Sticks	CLEAN-STICKS-250
Bottle of Corning Fiber Cleaning Fluid	FCC-CLEANER-FIBER
Lint-free Cleaning Wipes, canister of 90	FCC-WIPES

AFL FASTConnect® FIELD-INSTALLABLE

(No Fiber Polishing Required)

The FASTConnect Tool Kit provides all necessary installation tools required for fiber preparation of 250/900µm, 2mm and 3mm cordage for AFL's prepolished FASTConnect. The Kit carrying case contains all industry standard termination tools, installation instructions, as well as adequate storage for carrying extra FAST connectors for on-site convenience.

Insertion Loss: SM/UPC average .2dB, SM/APC average .3dB, MM/PC average -.25dB

Optical Return Loss: SM/UPC average -50dB, SM/APC average -55dB, MM/PC average -.1dB



KIT CONTENTS

QTY	DESCRIPTION	PART #
1	CT-50 Universal Cleaver	S014080
1	FASTConnect SC Assembly Tool	CS007780
1	FASTConnect LC Assembly Tool	CS007779
1	3mm Cable Clamp	S014704
1	2mm Cable Clamp	S014705
1	250/900µm Cable Clamp	CS004442
1	Fiber Preparation Fluid	FRF1-00-0900
1	Installation Instructions	CS007701
1	Strip Length Template	CS001203
1	Assembly Video	CS001204
1	Carrying Case	CS001202



PART #	DESCRIPTION	PRICE
CS001201	FASTConnect Universal Tool Kit with AFL CT50 Precision Cleaver	\$1,755.00
CS010975	FASTConnect Universal Tool Kit with AFL CT16 Precision Cleaver	1,095.00

FASTConnect

PART #	DESCRIPTION	PRICE - 6 pack
FAST-SC-MM50L-6	FASTConnect-SC OM3 10G, 900µm Boot	\$56.95
FAST-SC-MM62.5-6	FASTConnect-SC 62.5/125µm MM 900µm Boot	56.95
FAST-SC-SM-6	FASTConnect-SC SM 900µm Boot	56.95
FAST-ST-MM62.5-6	FASTConnect-ST 62.5/125µm 900µm Boot	76.00
FAST-ST-SM-6	FASTConnect-ST SM 900µm Boot	80.25
FAST-LC-MM62.5-6	FASTConnect-LC 62.5/125µm 900µm Boot	56.95
FAST-LC-MM50L-6	FASTConnect-LC OM3 10G 900µm Boot	56.95
FAST-LC-SM-6	FASTConnect-LC SM 900µm Boot	56.95
FAST-SC-SMAU-6	FASTConnect- 900µm Termination, SM, SC/APC	56.95
FAST-SC-48SMAU-6	FASTConnect- 4.8mm Cable, SM, SC/APC	98.95



HOT MELT ACCESSORIES

PART #	DESCRIPTION	PRICE
F1-9110	FIS 6 Port Hot Melt Oven 110V	\$995.00
F1-9110220	FIS 6 Port Hot Melt Oven 220V	1,450.00
F1-9130	FIS 12 Port Hot Melt Oven 110V	950.00
6192A	2µm 5" Polish Film 50 Pack	26.95
6192B	2µm 4" Polish Film for 6850A Polisher (with hole) 50 per Pack	16.95
6192-AA	Singlemode Final Polish Film for Hot Melts	65¢

CORNING CORNING HOT MELT

CORNING Hot Melts continue to be a popular choice among installers in the field. The Hot Melt connectors utilize an advanced adhesive technology eliminating the application of epoxy. The connectors provide quick termination in 2 minutes or less and are re-heatable to allow for fiber repositioning.

Fiber polishing required with Hot Melt Connectors.

CORNING HOT MELT CONNECTORS (Fiber Polishing Required)

PART #	STYLE	FIBER SIZE	TYPICAL LOSS	TYPE	PRICE
6100	ST	125µm	.2dB	Multimode	\$11.95
8100YS	ST	126µm	.2dB	Singlemode	13.75
6200	FC	125µm	.2dB	Multimode	8.25
8200W	FC	126µm	.2dB	Singlemode	15.95
6300W	SC	125µm	.2dB	Multimode	8.50
8300	SC	126µm	.2dB	Singlemode	12.25



See pages
152-153
for Custom
Drilling Prices



F1-3066



F1-3066C

CORNING



9525006



SEIKOH GIKEN



SSCPE3C1261A300G



SC CONNECTORS

The SC connector is a non-optical disconnect connector with a 2.5mm pre-radiused zirconia ferrule. Available in simplex and duplex styles, this connector features a push-pull connection design for quick patching of cables into rack or wall mounts. Utilize the reusable duplex holding clip to create duplex connections. *Add "100" to the end of the part number for bulk part numbers (ex. F13066100)



PART #	TYPE	BOOT SIZE	FERRULE SIZE	FERRULE	PRICE	100pk BULK PRICE
FIS						
F1-3066	Multimode	3mm	127µm	Zirconia	\$2.80	\$265.00
F1-306620	Multimode	2mm	127µm	Zirconia	2.80	265.00
F1-3066900	Multimode	900µm	127µm	Zirconia	2.80	265.00
F1-3061	Multimode	3mm	127µm	Stainless Alloy	5.25	----
F1-3069	Singlemode	3mm	126µm	Zirconia	3.00	285.00
F1-306920	Singlemode	2mm	126µm	Zirconia	3.00	285.00
F1-3069900	Singlemode	900µm	126µm	Zirconia	3.00	285.00
F1-3069APC	Singlemode APC	3mm	126µm	Zirconia	5.00	475.00
F1-3069900APC	Singlemode APC	900µm	126µm	Zirconia	5.00	475.00
F1-3069APC20	Singlemode APC	2mm	126µm	Zirconia	5.00	475.00
F1-3066AR	Multimode (Anaerobic)	3mm	125µm	Zirconia	3.50	----
F1-CLBK	Duplex Clip (Black for Multimode)				0.50	----
F1-CLBL	Duplex Clip (Blue for Singlemode)				0.50	----
F1-3066AQ	Multimode 10 Gig	3.0mm	127µm	Zirconia	3.50	310.00
F1-3066AQ20	Multimode 10 Gig	1.6/ 2.0mm	127µm	Zirconia	3.50	310.00
F1-3066AQ900	Multimode 10 Gig	900µm	127µm	Zirconia	3.50	310.00

IMPORTS

F13066CI	Multimode	3mm / Beige		Zirconia	\$0.90	\$85.00
F13066CI2	Multimode	2mm / Beige		Zirconia	0.90	85.00
F13066CI2AQ	Multimode	2mm / Aqua		Zirconia	0.90	85.00
F13066CI900	Multimode	900µm / Beige		Zirconia	1.10	100.00
F13066CI900	Multimode	900µm / Aqua		Zirconia	1.10	100.00
F13069CI	Singlemode	3mm / Blue		Zirconia	1.10	100.00
F3069CI2	Singlemode	2mm / Blue		Zirconia	1.20	110.00
F13069CI900	Singlemode	900µm / Blue		Zirconia	1.20	110.00
F13069CI2APC	Singlemode APC	2mm / Green		Zirconia	1.20	110.00
F13069CI900APC	Singlemode APC	900µm / Green		Zirconia	1.20	110.00
F13069CIAPC	Singlemode APC	3mm / Green		Zirconia	1.20	110.00

CORNING

6306	Multimode	3mm	125µm	Zirconia	\$5.25	
95-100-48SP	Multimode	3mm	125.5µm	Zirconia	3.50	
95-100-48SP2	Multimode	2mm	125.5µm	Zirconia	3.50	
95-101-41SP	Multimode (Anaerobic)	3mm	125µm	Zirconia	6.25	
95-201-41SP	Singlemode	3mm	126µm	Zirconia	10.00	

SEIKOH GIKEN

SSC-PE591261A300G	Singlemode	900µm	125µm	Zirconia	\$3.00	
SSC-PE5C1261A300G	Singlemode	3mm / Blue	126µm	Zirconia	3.00	
SSC-PNE871251B300G	Singlemode APC	3mm / Green	125µm	Zirconia	4.25	
SSC-PNE891261B300	Singlemode APC	900µm / Green	126µm	Zirconia	4.25	

Connectors
Available In
2mm, 3mm &
900µm
Versions

BUY FIS IN BULK AND SAVE

MTP® CONNECTORS

US Conec manufactures durable MTP® brand connectors that provide quick connection for up to 72 optical fibers. MTP® ferrules are available as Standard or Elite options (see table below for specifications). MTP® Connectors have variants of 8, 12, 16, 24, 32, 48, and 72 fibers, with the 12 and 24 options being the most common. From 12 - 72 fibers listed are 12 & 24 variations.

PART #	DESCRIPTION	FERRULE	CABLE TYPE	PRICE
MTP-12MMBRD	MTP Connector 12 Fiber Multimode OM1 Male Beige Housing	Standard	3.0mm/Round	15.75
MTP-12MFBRD	MTP Connector 12 Fiber Multimode OM1 Female Beige Housing	Standard	3.0mm/Round	15.75
MTP-12SMFE0V	MTP Connector 12 Fiber Singlemode APC Female Mustard Housing	Elite	Ribbon/Oval	38.95
MTP-12SMME0V	MTP Connector 12 Fiber Singlemode APC Male Mustard Housing	Elite	Ribbon/Oval	38.95
MTP-12MMFE0V	MTP Connector 12 Fiber Multimode OM3/4 Male Aqua Housing	Elite	Ribbon/Oval	25.75
MTP-12MFE0V	MTP Connector 24 Fiber Multimode OM3/4 Female Aqua Housing	Elite	Ribbon/Oval	38.95
MTP-24MME0V	MTP Connector 24 Fiber Multimode OM3/4 Male Aqua Housing	Elite	Ribbon/Oval	38.95
MTP-24SM0V	MTP Connector 24 Fiber Singlemode APC Male Green Housing	Standard	Ribbon/Oval	42.95
MTP-24SFOV	MTP Connector 24 Fiber Singlemode APC Female Green Housing	Standard	Ribbon/Oval	42.95
MTP12SMFERD	MTP Connector 12 Fiber Singlemode APC Female Mustard Housing	Elite	3.0mm/Round	31.80
MTP12SMMERD	MTP Connector 12 Fiber Singlemode APC Male Mustard Housing	Elite	3.0mm/Round	36.25
MTP12MEFRD	MTP Connector 12 Fiber Multimode OM3/4 Female Aqua Housing	Elite	3.0mm/Round	29.95
MTP12MEMRD	MTP Connector 12 Fiber Multimode OM3/4 Male Aqua Housing	Elite	3.0mm/Round	34.25

NOTE: Singlemode MTP Connectors are angled at 8° to improve performance (indicated by green and mustard housing)

USCONEC



MTP12MM



MTP12MME0V



MTP12MMRD2M

STANDARD FERRULES VS. ELITE FERRULES SPECIFICATIONS

	STANDARD FERRULES		ELITE FERRULES	
	Standard Singlemode MT Ferrule	Standard Multimode MT Ferrule	MM MT Elite® Multimode MT Ferrule	SM MT Elite® Singlemode MT Ferrule
Insertion Loss	0.25dB Typical (All Fibers) 0.75dB Maximum (Single Fiber)	0.20dB Typical (All Fibers) 0.60dB Maximum (Single Fiber)	0.1dB Typical (All Fibers) 0.35dB Maximum (Single Fiber)	0.10dB Typical (All Fibers) 0.35dB Maximum (Single Fiber)
Optical Return Loss	>60dB (8° Angle Polish)	>20dB	>20dB	>60dB (8° Angle Polish)

MTP PRO Connectors & Accessories

The MTP® PRO connector offers quick and effective polarity and pin reconfiguration in the field while ensuring product integrity and performance by utilizing the MTP® PRO field tool. The PRO connectors are available as an option on cable assemblies (see page 12). Purchase the Pro field tool to change gender or polarity, extra pin exchanges are available in ten packs.

PART #	DESCRIPTION	FERRULE	CABLE TYPE	PRICE
MTP-12MMF-PRO-RD	MTP PRO Connector Kit, Female, MM, Aqua	Elite	2.8-3.2mm Round	\$25.50
MTP-12MMM-PRO-RD	MTP PRO Connector Kit, Male, MM, Aqua	Elite	2.8-3.2mm Round	28.50
MTP-12SMM-PRO-RD	MTP PRO Connector Kit, Male, SM, Green	Elite	2.8-3.2mm Round	46.50
MTP-12SMF-PRO-RD	MTP PRO Connector Kit, Female, SM, Green	Elite	2.8-3.2mm Round	39.75
18814	MTP Pro Field Tool			100.00
18841	MTP Pro Pin Exchanger, SM Elite, Female (No Pins), Yellow holder, 10 pack			17.25
18843	MTP Pro Pin Exchanger, SM Elite, Male (With Pins), Yellow holder, 10 pack			69.95
18256	MTP Pro Pin Exchanger, MM, Female (No Pins), Aqua holder, 10 pack			17.25
18842	MTP Pro Pin Exchanger, MM, Male (With Pins), Aqua holder, 10 pack			32.85



MTP® ADAPTERS

PART #	DESCRIPTION	COLOR	COLOR	PRICE
MTP-ADPT	MTP Adapter, Full Flange, Key Up to Key Down (Type A or C), Standard Footprint		Black	\$5.95
MTP-9299	MTP Adapter, Screw Mount 30 Degree Angle, Key Up to Key Down (Type A or C)		Black	14.95
MTP-RFADPT	MTP Adapter, Reduced Flange, Key Up to Key Down (Type A or C), Standard Footprint		Black	5.65
12219	MTP Adapter, Full Flange, Key Up to Key Down (Type A or C), SC Footprint		Aqua	4.00
5306	MTP Adapter, Full Flange, 1 Dust Cap, Key Up to Key Up (Type B)		Gray	3.65
12196	MTP Adapter, Full Flange, 2 Dust Cap, Key Up to Key Up (Type B)		Gray	4.25
12228	MTP Adapter SC Footprint Reduced Flange, Key Up to Key Down (Type A or C), SC Footprint		Green	4.25



MTP-ADPT



MTP-RFADPT



12228



12219



See pages
152-153
for Custom
Drilling Prices



F1-0066



F1-0066C12

CORNING



6105

CORNING



95-250-06SP

ST CONNECTORS

The ST connector utilizes a bayonet twist-lock connection with 2.5mm ferrule; the ST connector features reliable and durable field installation. The design of the ST connector enables installers to crimp the back of the body directly onto the cable jacket and Kevlar®. This eliminates cable pull-away, ensuring a strong termination. Upon request, FIS ST connectors can be supplied without FIS markings. Stainless alloy ferrules can be custom drilled. *Add "100" to the end of the part number for bulk part numbers (ex. F10066100)



PART #	TYPE	BOOT SIZE	FERRULE SIZE	FERRULE	PRICE	100pk BULK PRICE
FIS						
F1-0066	Multimode	3mm	127µm	Zirconia	\$1.90	\$170.00
F1-006620	Multimode	2mm	127µm	Zirconia	1.90	170.00
F1-0066900BLK	Multimode	900µm	127µm	Zirconia	1.90	170.00
F1-0067	Multimode	3mm	140µm	Zirconia	3.50	----
F1-0069	Singlemode	3mm	126µm	Zirconia	2.35	225.00
F1-006920	Singlemode	2mm	126µm	Zirconia	2.35	225.00
F1-0069900	Singlemode	900µm	126µm	Zirconia	2.35	225.00
F1-0061	Multimode	3mm	127µm	Stainless Alloy	4.45	----
F1-006120	Multimode	2mm	127µm	Stainless Alloy	4.45	----
F1-0063	Multimode	3mm	140µm	Stainless Alloy	4.45	----
F1-0064	Multimode	3mm	230µm	Stainless Alloy	4.45	----
F1-0065	Plastic Fiber	3mm	1000µm	Stainless Alloy	4.45	----
F1-1066AR	Multimode (Anaerobic)	3mm	125µm	Zirconia	2.75	----
F1-0066AQ	Multimode 10 Gig	3mm	127µm	Zirconia	2.35	220.00
F1-0066AQ20	Multimode 10 Gig	2mm	127µm	Zirconia	2.35	220.00
F1-0066AQ900	Multimode 10 Gig	900µm	127µm	Zirconia	2.35	220.00

IMPORTS

F10066CI	Multimode	3mm / Black		Zirconia	\$0.90	\$85.00
F10066CIAQ	Multimode	3mm / Aqua		Zirconia	0.90	85.00
F10066CI2	Multimode	2mm / Black		Zirconia	0.90	85.00
F10066CI900	Multimode	900µm / Black		Zirconia	0.90	85.00
F10066CI900AQ	Multimode	900µm / Aqua		Zirconia	1.00	95.00

CORNING

6105	Multimode	3mm	125µm	Zirconia	\$3.25	
8106	Singlemode	3mm	126µm	Zirconia	4.85	
95-100-44SP	Multimode	3mm	125.5µm	Zirconia	3.25	
95-100-44SP2	Multimode	2mm	125.5µm	Zirconia	4.85	
95-250-06SP	Singlemode	3mm	125.5µm	Composite	4.85	

FIS FC CONNECTORS

FC connectors are specifically designed for telecommunication applications and provide non-optical disconnect performance. Designed with a threaded coupling for durable connections. The ferrule is PC finished to a pre-radius, which ensures low back reflection. Stainless alloy ferrules can be custom drilled to your specifications. All FIS FC connectors use narrow key (2.0mm).

*Add "100" to the end of the part number for bulk part numbers (ex. F2073100)

PART #	TYPE	BOOT SIZE	FERRULE SIZE	FERRULE	PRICE	100pk BULK PRICE
FIS						
F1-2073	Multimode	3mm	127µm	Zirconia	\$4.25	\$400.00
F1-2073900	Multimode	900µm	127µm	Zirconia	4.25	400.00
F1-2777	Multimode	3mm	140µm	Zirconia	5.50	----
F1-2771	Multimode	3mm	128µm	Stainless Alloy	6.25	----
F1-2772	Multimode	3mm	140µm	Stainless Alloy	6.25	----
F1-2774	Multimode	3mm	230µm	Stainless Alloy	4.50	----
F1-2070	Singlemode	3mm	126µm	Zirconia	4.50	430.00
F1-207020	Singlemode	2mm	126µm	Zirconia	4.50	430.00
F1-2070900	Singlemode	900µm	126µm	Zirconia	4.50	430.00
F1-2070APC	Singlemode APC	3mm	126µm	Zirconia	5.00	475.00
F1-2070APC20	Singlemode APC	2mm	126µm	Zirconia	5.00	475.00
F1-2070900APC	Singlemode APC	900µm	126µm	Zirconia	5.00	475.00
F1-2073AQ	Multimode 10 Gig	3mm	127µm	Zirconia	4.25	400.00
F1-2073AQ900	Multimode 10 Gig	900µm	127µm	Zirconia	4.25	400.00



F1-2073

See pages
152-153
for Custom
Drilling Prices



LC CONNECTORS

The LC connector licensed by Lucent Technologies provides a pull-proof design and small size perfect for high-density applications. Available in simplex or duplex versions. The LC connector is provided with a 1.25mm zirconia ferrule. The LC also incorporates a unique latching mechanism providing stability in system rack mounts.

*Add "100" to the end of the part number for bulk part numbers (ex. F15066100)

PART #	TYPE	BOOT SIZE	FERRULE SIZE	FERRULE	PRICE	100pk BULK PRICE
FIS						
F1-5066	Simplex-MM	3mm	128µm	Zirconia	\$2.30	\$200.00
F1-5066AAQ	Simplex-MM OM3/OM4 - Aqua	3mm	126µm	Zirconia	2.50	210.00
F1-506616AAQ	Simplex-MM OM3/OM4 - Aqua	1.6-2mm	128µm	Zirconia	2.50	210.00
F1-506616	Simplex-MM	1.6-2mm	128µm	Zirconia	2.30	200.00
F1-506616M	Simplex-MM OM4 - Magenta	1.6-2mm	128µm	Zirconia	2.75	250.00
F1-5066900	Simplex-MM	900µm	128µm	Zirconia	2.30	200.00
F1-5069	Simplex-SM	3mm	126µm	Zirconia	2.75	265.00
F1-506916	Simplex-SM	1.6-2mm	126µm	Zirconia	2.75	265.00
F1-5069900	Simplex-SM	900µm	126µm	Zirconia	2.75	265.00
F1-5069APC	Simplex APC	3mm	126µm	Zirconia	5.35	450.00
F1-5069900APC	Simplex APC	900µm	126µm	Zirconia	5.35	450.00
F1-6066	Duplex-MM	3mm	128µm	Zirconia	4.75	400.00
F1-606616	Duplex-MM	1.6-2mm	128µm	Zirconia	4.75	400.00
F1-606616M	Duplex-MM OM3 - Magenta	1.6-2mm	128µm	Zirconia	5.00	----
F1-6066AQ	Duplex-MM OM3/OM4 - Aqua	3mm	128µm	Zirconia	5.00	----
F1-606616AQ	Duplex-MM OM3/OM4 - Aqua	1.6-2mm	128µm	Zirconia	5.00	----
F1-6069	Duplex-SM	3mm	126µm	Zirconia	5.75	500.00
F1-606916	Duplex-SM	1.6-2mm	126µm	Zirconia	5.75	500.00
F1-6069900	Duplex-SM	900µm	126µm	Zirconia	5.75	500.00
F1-5066AR	Anaerobic-MM	3mm	128µm	Zirconia	3.50	----
F1-6067	Duplex Mini LC-SM - Blue *	1.6mm	126µm	Zirconia	5.75	----
F1-6068AQ	Duplex Mini LC-MM OM3/OM4 - Aqua *	1.6mm	127µm	Zirconia	4.75	----
F1-6068	Duplex Mini LC-MM - Beige *	1.6mm	127µm	Zirconia	4.75	----

*The Mini LC Connector is designed with a narrow ferrule pitch (5.25mm) to work with the Mini SFP (mSFP) transceiver.

USCONEC ELIMENT® DUPLEX LC UNIBOOT

22626	Duplex LCUPC, Blue Housing/Uniboot Black Boot 1.6-2.0mm Jacket	Not for resale – Utilized on FIS Custom Assemblies
22628	Duplex LCAPC, Green Housing/Uniboot Black Boot 1.6-2.0mm Jacket	Not for resale – Utilized on FIS Custom Assemblies
22630	Duplex LC Multimode, OM3 Aqua Housing/Uniboot Black Boot 1.6-2.0mm Jacket	Not for resale – Utilized on FIS Custom Assemblies
22632	Duplex LC Multimode, OM4 Violet Housing/Uniboot Black Boot 1.6-2.0mm Jacket	Not for resale – Utilized on FIS Custom Assemblies

CORNING

95-100-LCSP	Simplex-MM	3.0mm	125.5µm	Zirconia	\$4.95
95-100-LCSP2	Simplex-MM	2.0mm	125.5µm	Zirconia	4.95
TRIGGER-BP-D	LC Clips(each) - Simplex to duplex converters				30¢



F1-5066AQ



F1-6068AQ



22630

Toolless
Polarity Reversal
Duplex LC Connectors
Are Available on FIS
Manufactured Custom
Cable Assemblies!

Available in
PC and APC Versions,
Low Profile, Accommodates
2mm or 3mm Cable.



95-100-LCSP

FC CONNECTORS

*Add "100" to the end of the part number for bulk part numbers (ex. F12070C100)

PART #	TYPE	BOOT SIZE	FERRULE SIZE	FERRULE	PRICE	BULK PRICE
FIS						
F12070CI	Singlemode	3mm / White		Zirconia	\$1.10	\$105.00
F12070CIAPC	Singlemode APC	3mm / Green		Zirconia	1.10	105.00
F12070CI2	Singlemode	2mm / White		Zirconia	1.10	105.00
F12070CI2APC	Singlemode APC	2mm / Green		Zirconia	1.35	135.00
F12070CI900	Singlemode	900µm / White		Zirconia	1.10	110.00
F12070CI900UPC	Singlemode	900µm / Blue		Zirconia	1.10	110.00
F12070CI900APC	Singlemode APC	900µm / Green		Zirconia	1.35	135.00

CORNING

8206FCAPC	Singlemode with Plastic Housing APC	3mm	126µm	Zirconia	\$12.50
95-100-10SP	Multimode	3mm	125µm	Zirconia	\$5.10
95-100-10SP2	Multimode	2mm	125.5µm	Zirconia	5.25

SEIKOH GIKEN

SNP8891261B3K2G	Singlemode	900µm / White	126µm	Zirconia	\$3.66
SNP8871261B3K2G	Singlemode APC	3mm / Green	126µm	Zirconia	4.10
SAP83331261A700G	Singlemode	3mm / White	126µm	Zirconia	3.00
SAP8531261A700G	Singlemode	3mm / Blue	126µm	Zirconia	3.00
SAP8591251A700G	Singlemode	900µm / Blue	126µm	Zirconia	3.40



F12070CIAPC







SEIKOH GIKEN



SNP8871261N3K2G

QUANTITY
DISCOUNTS
AVAILABLE

1. Choose your style
2. Choose your color

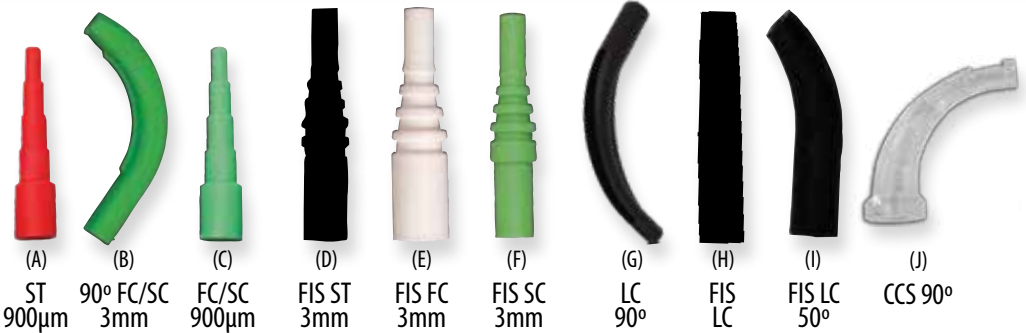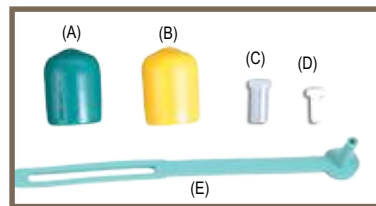

STRAIN RELIEF BOOTS


Designed to be utilized on .128, .151, and .190 crimp sleeves. FIS boots are available in Red (R), Black (B), Green (GR), Blue (BLU), Aqua (AQ), White (W), and Yellow (Y). Replace X with abbreviation of color in parenthesis. Replace "x" with color code.

PART #	DESCRIPTION (See Strain Relief Boot style chart above)	ID	Length	Crimp Size	PRICE
667342900-25-X	FIS ST 900µm Boot (A) (25 pk.)	0.15	1.13"	0.128	\$6.25
CONN90-25-X	FIS SC and FC 3mm 90° Boot (B) (25 pk.)	0.20	1.40"	0.190	13.75
CONN107900-25-X	FIS SC and FC 900µm Boot (C) (25 pk.)	0.17	1.13"	0.179	6.25
667342-BC-25-X	FIS ST 3mm Boot (D) (25 pk.)	0.15	1.47"	0.128	6.25
6673422-BC-25-X	FIS ST 2mm Boot (25 pk.)	0.15	1.47"	0.128	6.25
CONN107BC-25-X	FIS FC 3mm Boot (E) (25 pk.)	0.20	1.25"	0.190	6.25
CONN1072-BC-25-X	FIS FC 2mm Boot (25 pk.)	0.20	1.25"	0.190	6.25
CONN205-25-X	FIS SC 3mm Boot (F) (25 pk.)	0.20	1.47"	0.190	6.25
F1-LC 90-BLK-25	FIS LC 90° 2mm Boot Black (G) (25 pk.)	0.137	1.44"	0.128	6.25
LCBOOTBL25	FIS LC 3mm Boot Black (H) (25 pk.)	0.137	1.10"	0.128	6.25
F1-LC45BL25	FIS LC 50° 2mm Boot Black (I) (25 pk.)	0.137	1.0"	0.128	6.25
F1-LC90M2590	FIS LC 90° 2mm Boot White (not shown) (25 pk.)	0.137	1.40"	0.128	6.25
F1-LC90GR25	FIS LC 90° 2mm Boot Green (not shown) (25 pk.)	0.137	1.40"	0.128	6.25
CONN205-X-M20	FIS SC 2mm Boot (not shown) (25pk.)	0.20	1.47"	0.190	6.25
9540002BP	Corning 90° Radius Boot Clip for ST/SC/FC 3mm Boots, Clear (J), for 3mm Cable				2.00
95400004BPC	Corning 90° Radius Boot Clip for LC Boots, Clear, for 2mm Cable				95¢

FERRULE PROTECTION CAPS

FIS protection caps are designed to provide protection against various elements that could damage either the ferrule or fiber. The universal clear protection caps fit ST, FC and SC style 2.5mm ferrules.

PART #	DESCRIPTION	PRICE
CPCYGR-B	Green Dust Cap Covers FC Housing (A) (100 pk.)	\$25.00
CPCY-B	Yellow Dust Cap Covers FC Housing (B) (100 pk.)	25.00
CAPB-B	Universal Clear Cap for 2.5mm Ferrules (C) (100 pk.)	25.00
F1-0125	Universal Dust Cap for 1.25mm Ferrules (D) (100 pk.)	25.00
F1-0125SA-100	Universal Dust Cap for 1.25mm Ferrules with jacket strap Aqua (E) (100 pk.)	25.00
F1-0125SBK-100	Universal Dust Cap for 1.25mm Ferrules with jacket strap Black (100 pk.)	25.00
F1-90010M	Universal Dust Cap for 2.5mm Ferrules with jacket strap (100 pk.)	25.00

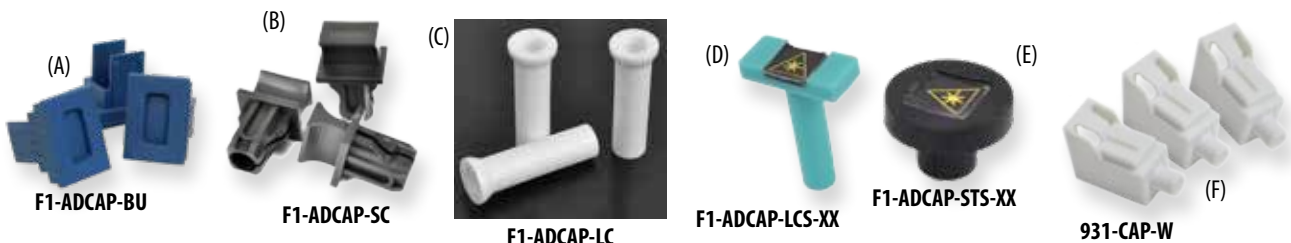

MATING SLEEVE ADAPTER CAPS

The dust caps for adapters are easy to misplace and now FIS makes them just as easy to replace. Available in multiple colors, see chart above. Replace XX with the color desired: BL=Black, BU=Blue, GR=Green, BE=Beige AQ=Aqua.

PART #	DESCRIPTION	PRICE
F1-ADCAP-100-BU	SC Mating Sleeve Adapter Dust Cap, Blue - 100 pk.	A \$19.00
F1-ADCAP-100-CL	SC Mating Sleeve Adapter Cap, Clear - 100pk	19.00
F1-ADCAP-100-XX	SC Mating Sleeve Adapter Cap - 100pk (Specify Color)	19.00
F1-ADCAP-SC	SC Mating Sleeve Click-in Style Adapter Cap, Black - 100pk.	B 35.00
F1-ADCAP-LC	LC Mating Sleeve Round Head Adapter Cap, White - 100pk.	C 35.00
F1-ADCAP-LCS-XX	LC Mating Sleeve Square Head with Laser Warning Sticker - 100pk (Specify Color)	D 47.95
F1-ADCAP-FCS-XX	FC Mating Sleeve Round Head with Laser Warning Sticker - 100pk (Specify Color)	47.95
F1-ADCAP-STS-XX	ST Mating Sleeve Round Head with Laser Warning Sticker - 100pk (Specify Color)	E 47.95
931-CAP-W	LC Uniboot Dust Cap White - 100pk	F 35.00

METAL CAP AND CHAINS

PART #	DESCRIPTION	PRICE
F1-9229-LC	Cap and Chain for LC Mating Sleeves	\$3.00
F1-9229-SC	Cap and Chain for SC Mating Sleeves	3.00
F1-9229-ST	Cap and Chain for ST Mating Sleeves	3.00
F1-9229-CH	Cap and Chain for FC Mating Sleeves	3.00




LASER SAFETY CAPS FOR MATING SLEEVES WITH METAL TILE

FIS has created a solution to the problem of laser light emitted from fiber optic bulkhead adapters. Our new Laser Safety Caps come with a warning symbol on each to visually alert people to potentially harmful exposure to laser light and cap has a built-in metal tile to stop laser light up to +18dBm. They are available for SC, LC, ST and FC styles. Replace X with the color desired: BL=Black, BLU=Blue, GR=Green, BE=Beige, AQ=Aqua, CL=Clear.

PART #	DESCRIPTION	PRICE
F1-BLSCST-X25	ST Bulkhead Laser Safety Cap - (25 pk.) (A)	\$37.95
F1-BLSCSC-X25	SC Bulkhead Laser Safety Cap - (25 pk.) (B)	37.95
F1-BLSCFC-X25	FC Bulkhead Laser Safety Cap - (25 pk.) (C)	37.95
F1-BLSCLC-X25	LC Bulkhead Laser Safety Cap - (25 pk.) (D)	37.95

CL-Clear	BLU-Blue	BL-Black	SL-Slate	BE-Beige	GR-Green	AQ-Aqua
----------	----------	----------	----------	----------	----------	---------

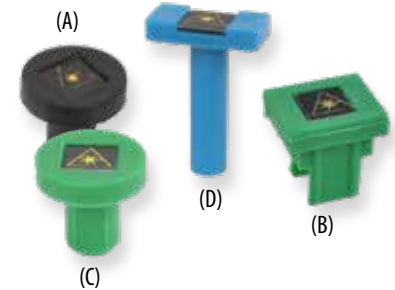


MALE – FEMALE ADAPTERS

Traditionally UPC and APC connectors have been incompatible to mate together due to the air-gap created between the two mating ferrules. This air-gap creates both undesirable high attenuation and high reflection in your network. The FIS M/F UPC-APC adapters allow UPC and APC fiber optic links to be mated together, adding flexibility to your network, while creating less than 1.0dB of Insertion Loss and -50dB of Return Loss.

Note: When purchasing these adapters be aware of the fiber type indicated and match to your application.

PART #	DESCRIPTION	HOUSING	SLEEVE	PRICE
F1-W1FSCA-SCU	SC/APC Female to SC/UPC Male (Singlemode)	Metal	Zirconia	\$9.95
F1-W1FSCU-SCA	SC/UPC Female to SC/APC Male (Singlemode)	Metal	Zirconia	9.95

See page 144 for a complete list of hybrid-adapters.

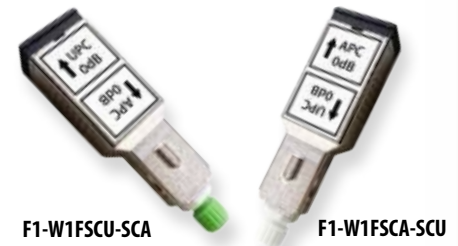

BUFFERED FIBER ADAPTERS

A Buffered Fiber Adapter enables you to make a quick, temporary connection to a cleaved buffered fiber without the need to connectorize. ST, FC, SC and SMA style adapters available. **Not recommended for use with test equipment.**

PART #	DESCRIPTION	PRICE
F1-8194	ST Buffered Fiber Adapter (For Use 900µm buffer)	\$39.95
F1-8294	FC Buffered Fiber Adapter (For Use 900µm buffer)	42.75
F1-8494	SC Buffered Fiber Adapter (For Use 900µm buffer)	45.00
F1-8394	SMA-905 Buffered Fiber Adapter (For Use 900µm buffer)	48.95



DID YOU KNOW...

The Importance of Cleaves and Field Terminations

Good cleave quality and consistency on field terminations significantly increases overall performance, especially on single mode fiber networks. Using an upgraded cleaver is the easiest and best way to achieve optimum results.

Although many manufacturers claim some increased performance using mechanically-spliced, quick termination field connectors, using a new precision optical cleaver is your most effective and cost-efficient option, especially when transitioning from factory-terminated fiber ends to field-terminated ends. The use of index matching gel inside the connector further aids in reducing the reflections resulting from any cleaving process.

The return on investing in a high-quality cleaver, sometimes \$600 to \$1300, that provides better results – and ultimately few issues during testing – is quickly recovered by eliminating costly connector replacements, technician field calls and system down-time.



Buy FIS Bulk Epoxy Packs and Save!!

FIS EPOXY FOR CONNECTORIZATION

Each pre-measured two-part packet contains the proper ratio for connectorization. Every packet includes specific directions for use with fiber optic connectors. The 2 gram pack will prepare 25 - 35 connectors. The 4 gram pack will prepare 50 - 70 connectors.

PART #	STYLE	2 GRAM PRICE	4 GRAM PRICE
H05-100-RX	Quick Cure, 5 Minutes at 100°C, Potlife 90 Minutes - Single Pack	\$5.25	Air Ship \$6.00
T60-065-BX	Blue Dye, 1 Hour at 60°C or 30 Minutes at 80°C, Potlife 45 Minutes - Single Pack	5.25	Air Ship 6.00
T120-023-CX	Room Cure, 30 Minutes at 23°C, Potlife 5 Minutes - Single Pack	5.25	Air Ship 6.00
H15-080-RX	Heat Cure, 15 Minutes at 80°C, Potlife 90 Minutes - Single Pack	5.25	Air Ship 6.00
H05-100-RX-50	Quick Cure - 50 Pack	190.00	Air Ship 225.00
T60-065-BX-50	Blue Dye - 50 Pack	190.00	Air Ship 225.00
T120-023-CX-50	Room Cure - 50 Pack	190.00	Air Ship 225.00
H15-080-RX-50	Heat Cure - 50 Pack	190.00	Air Ship 225.00

Replace "X" with "2" for 2 Gram Package or "4" for 4 Gram Package.



BAF113SC



353ND

501202-1



680

7649

F1-608 F1-ANAEROBICKIT



F1-707010

LOCTITE EPOXY / TRA-CON ECCOBOND EPOXY

LOCTITE / TRA-CON epoxies, are popular well respected brand in our industry. Offerings provide quick cure, blue dye, and room cure epoxies. Common applications for fiber optic connectors and fiber potting.

Air Ship Available

PART #	DESCRIPTION	PRICE
BAF123	Loctite F 123: 2 part, Quick cure epoxy, colored keyed to indicate status. 5 min. @ 100° C, Pot Life 4 hours. Alternative cure schedules available. Most suitable for Singlemode use due to cure temperature and schedule, but also used in multimode applications. 2.42 gm.	\$9.50
BAF113SC	Loctite F113SC: 2 part epoxy. Blue dyed cures in dark blue for easy polishing. Formulated to terminate all types of fiber optic connectors. Pot Life 35 min. Sufficient Cure for polishing connectors at 15 min. @ 90° C. With full cure 1 hour @ 65° C. Alternative cure schedules available. 2.5 gm.	11.70
BAF120	Loctite F 120: 2 part epoxy, Room cure at 1 hour @ 65° C. Used for bonding fiber optic, optical and laser industry specific materials. Ideal for use on DuPont PIFAX plastic core, glass cables. SM or MM terminations and connectors, and fiber potting. 2.5 gm.	13.50
BAF112	Loctite F 112: 2 part epoxy. Blue Dyed epoxy cures dark blue for easy polishing. Sufficient cure for polishing 15 min. @ 90° C. Full cure at 1 hour @ 65° C. Pot Life 30 min. Suitable for SM or MM assembly. Ideal for multimode applications due to low temperature cure schedule. 2.5 gm.	11.45
501202-1	Epoxy Roller Mixer, 2" Flat Maple Seam, Dura Soft Handle	8.75

EPO-TEK EPOXY

The two-part EPO-TEK Epoxy is a favorite of many fiber optic users. The epoxy remains liquid until heat is applied. The application of heat provides a quick cure, turning the epoxy to a reddish-brown color. The EPO-TEK Epoxy will not react like other epoxies to coating applied to the larger core/clad diameter of specialty fibers.

PART #	DESCRIPTION	PRICE
353ND	EPO-TEK Epoxy (8 oz. Kit)	\$85.00



ANAEROBIC ADHESIVE

This two-part system self cures in minutes with no heat required. The retaining compound is injected into the connector with a syringe needle. Dip or spray the fiber with primer and connectorize as usual. Sets in 30 seconds, fully cured in minutes. Domestic ground shipment only.

PART #	DESCRIPTION	PRICE
680	Anaerobic Adhesive Hardener, 10 milliliter	\$20.25
7649	Primer, 1.75 ounce	23.75
F1-ANAEROBICKIT	Kit (Anaerobic Adhesive-10ml, Primer 1.75oz and Syringe Tip)	71.95



HYSOL EPOXY

Contained in two separate tubes or packets, the Hysol Epoxy can be heat or time cured. Hysol Epoxy is excellent for general connector use. A quick dry, 4 gram, mini packet is available for individual connector repair.


PART #	DESCRIPTION	PRICE
F1-707010	Hysol Epoxy (3.4 oz.) (10 sets in each case)	\$185.00
F1-608	Mini Packet (4gm) Fast Cure Epoxy	4.70



EPOXY APPLICATION SYRINGE

When assembling multiple fiber optic connectors, these Epoxy Syringes enable you to work quickly and efficiently. The included dispensers (needles) enable you to easily inject epoxy into connectors. Economically priced, they can be replaced the moment the epoxy is no longer easily workable. A larger diameter 1.1mm applicator needle is also available, F1-4012, which can be used with the 501473-3IR empty syringe.

PART #	DESCRIPTION	PRICE
501473-3IRC5	Empty Syringe with .9mm Needle (5 pk.)	\$1.35
501473-3IRC25	Empty Syringe with .9mm Needle (25 pk.)	6.75
501473-3IRC100	Empty Syringe with .9mm Needle (100 pk.)	25.95
F1-4012	1.1mm Applicator Needle for CORNING/3M Connectors (25 pk.)	78.20

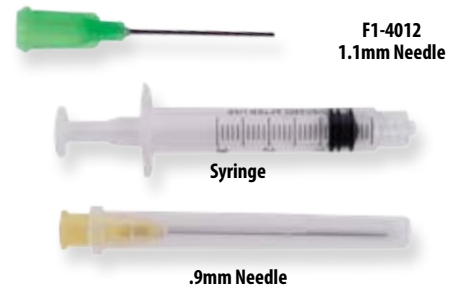

FIS MPO/MTP CURING OVEN

Maximize productivity with the FIS MPO/MTP Cure Oven. Designed to cure up to 24 MPO/MTP ferrules at one time. The MPO/MTP Oven's temperature control is adjustable between 50° and 150°C to work with the cure schedules of all the popular brands of epoxies. The FIS MPO/MTP Cure Oven also features a built in timer for convenience. Like the rest of our family of connector cure ovens, the MPO/MTP Cure Oven is designed to be simple, durable and easy to use.


PART #	DESCRIPTION	PRICE
F19778	FIS MTP Curing Oven, 24 position	\$1,955.00



FIS CONNECTOR HEAT OVEN

To prevent epoxy "out gassing" that can cause fiber fractures and other connector problems, it is important that a connector curing oven provide reliable operation. The FIS Connector Oven is preferred by many installers because it is simple, dependable, and easy-to-use.

PART #	DESCRIPTION	PRICE
F1-9772	24 Port Heat Oven (FC/ST/D4/SMA/SC) 4011-0000 Included	\$520.00
F1-977220	24 Port Heat Oven (220 V) (FC/ST/D4/SMA/SC) 4011-0000 Included	520.00
9091	MU/LC Holding Block	125.00
9090	Universal Holding Block (side A - ST, FC, SMA, D4, side B - Biconic, SC)	125.00
9092	MTRJ/MTP Ferrule Holding Block	125.00
4011-0000B	24 Port Block (FC,ST,D4,SMA,SC)	125.00
F1-0VSTND	Curing Stand	36.95
8032-0000	Thermometer	21.95

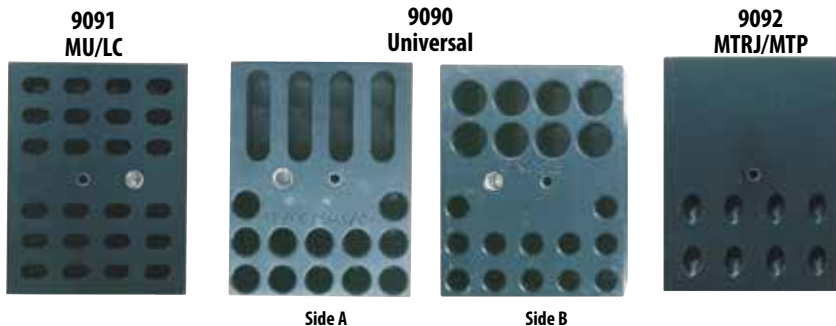

OVEN PROTECTION SLEEVES

Use to prevent breakage of protruding fiber during connector heat oven curing process. These oven protection sleeves are reusable.

PART #	DESCRIPTION	PRICE
80879000M	Oven Protection Sleeve, 2.5mm Ferrules	.50¢

FIS HOT MELT AND DUAL PURPOSE HEAT OVENS

Sometimes, you may use epoxy-style connectors. Other times, you may prefer Corning/3M Hot-Melt connectors. This Dual Purpose Oven lets you use both! This unit includes an 8-port epoxy heater block, with temperature settings up to 100°C, and a 6-port hot melt block factory set at 245°C, which accepts 3M/Corning Hot Melt connectors. Each block has its own switch.

PART #	DESCRIPTION	PRICE
F1-9110	FIS 6 Port Hot Melt Oven (110v) (pictured) (Hot Melts Only)	\$1,020.00
F1-9110220	FIS 6 Port Hot Melt Oven (220v) (Hot Melts Only)	1,600.00
F1-9130	FIS 12 Port Hot Melt Oven (Hot Melts Only)	1,000.00
F1-9150	FIS 14 Port Dual Purpose Hot Melt / Standard Epoxy Oven	835.00
F1-5225	FIS ST/SC/FC Universal Connector Holder	115.00





For Quality Assurance 3M™ Polish Film Is Sold Only In Factory Packs of 25 or 50. Order film in quantities of 25's or 50's.

Call for other grades, sizes and pressure sensitive adhesive (PSA) backed products.

3M™ DIAMOND LAPPING FILMS

Premium diamond abrasive film to cut and polish hard ceramic ferrules and glass cores at the same level, at a consistent rate.

3M™ POLISHING FILM - MT

- Eliminates slurries and messy cleanup
- High first-pass yield minimizes rework
- Precisely graded particles are coated on a high-strength backing

3M™ LAPPING FILMS

- Micron graded materials on uniform polyester backing
- Provides consistent, repeatable finishes in sequence
- Use on ceramic, stainless steel, plastic and composite ferrules
- Innovative, cost-effective method to finish fiber optic connectors

3M™ FINAL POLISH DISCS

For final polishing fiber optic connectors, this film meets industry standards for back reflection.

- Eliminates slurries and messy cleanup
- High first-pass yield minimizes rework
- Meets Telcordia Standards GR-326

3M™ LAPPING FILM 5" DISCS

PART #	MATERIAL	GRIT	PACK SIZE	PACK PRICE
DLF5XN.5661X-25	Diamond	.5µm	25	\$131.50
DLF5XN01661X-25	Diamond	1µm	25	131.50
DLF5XN03661X-25	Diamond	3µm	25	131.50
DLF5XN06661X-25	Diamond	6µm	25	131.50
DLF5XN15661X-25	Diamond	15µm	25	131.50
A05XN.05263X-50	Aluminum Oxide	.05µm	50	84.25
A05XN.3263X-50	Aluminum Oxide	.3µm	50	85.70
A05XN03263X-50	Aluminum Oxide	3µm	50	31.95
SC5XN15461X-50	Silicon Carbide	15µm	50	33.75
HDF5XN0.5662XW-25	Diamond H	.5µm	25	137.00
HDF5XN01662XW-25	Diamond H	1µm	25	137.00
HDF5XN1.5662XW-25	Diamond H	1.5µm	25	206.25
HDF5XN03662XW-25	Diamond H	3µm	25	137.00
HDF5XN06662XW-25	Diamond H	6µm	25	137.00
863X5NH-50	5" Final Polish		50	173.25
865X5NH-50	5" Final Polish		50	256.75

3M™ POLISHING FILM - MT 5" DISCS

PART #	MATERIAL	GRIT	PACK SIZE	PACK PRICE
FCO-0.55XN598PSA-50	Cerium Oxide Flock Film PSA	0.5µm	50	\$110.95
FAO-0.55XN298PSA-50	Aluminum Oxide Flock Film PSA	0.5µm	50	199.00
FAO-015XN298PSA-50	Aluminum Oxide Flock Film PSA	1µm	50	113.50
FSC-035XN498PSA-50	Silicon Carbide Flock Film PSA	3µm	50	199.00
SC155XN468PSA-50	Silicon Carbide Lapping Film PSA	15µm	50	55.00
SC035XN468PSA-50	Silicon Carbide Lapping Film PSA	3µm	50	65.75
SC305XN468PSA-50	Silicon Carbide Lapping Film PSA	30µm	50	65.75

3M™ LAPPING FILM 4" DISCS

PART #	MATERIAL	GRIT	PACK SIZE	PACK PRICE
DLF4XN01661X-50	Diamond	1µm	50	\$306.50
DLF4XN03661X-50	Diamond	3µm	50	241.50
DLF4XN06661X-50	Diamond	6µm	50	241.50
DLF4XN15661X-50	Diamond	15µm	50	306.50
A04XN.05263X-50	Aluminum Oxide	.05µm	50	54.95
A04XN.3263X-50	Aluminum Oxide	.3µm	50	54.95
A04XN03263X-50	Aluminum Oxide	3µm	50	30.95
SC4XN15461X-50	Silicon Carbide	15µm	50	30.95
HDF4XN0.5662XW-50	Diamond H	.5µm	25	375.00
HDF4XN01662XW-50	Diamond H	1µm	25	375.00
HDF4XN03662XW-50	Diamond H	3µm	25	375.00
HDF4XN06662XW-50	Diamond H	6µm	25	375.00

3M™ LAPPING FILM 9" X 13" SHEETS

PART #	MATERIAL	GRIT	PACK SIZE	PACK PRICE
A09X130.3261X-50	Aluminum Oxide	.3µm	50	\$184.50
A09X1301262X-50	Aluminum Oxide	1µm	50	184.50
A09X1302262X-50	Aluminum Oxide	2µm	50	184.50
A09X1303261X-50	Aluminum Oxide	3µm	50	184.50
A09X1312261X-50	Aluminum Oxide	12µm	50	184.50
A09X1309261X-50	Aluminum Oxide	9µm	50	184.50
SC9X1305461X-50	Silicon Carbide	5µm	50	184.50
SC9X1315461X-50	Silicon Carbide	15µm	50	184.50
SC9X1330461X-50	Silicon Carbide	30µm	50	184.50

3M™ LAPPING FILM 9" X 6.5" SHEETS

PART #	MATERIAL	GRIT	PACK SIZE	PACK PRICE
A09X60.3261X-50	Aluminum Oxide	.3µm	50	\$92.25
A09X601262X-50	Aluminum Oxide	1µm	50	92.25
A09X602262X-50	Aluminum Oxide	2µm	50	92.25
A09X603261X-50	Aluminum Oxide	3µm	50	92.25
A09X609261X-50	Aluminum Oxide	9µm	50	92.25
SC9X605461X-50	Silicon Carbide	5µm	50	92.25
SC9X615461X-50	Silicon Carbide	15µm	50	92.25
SC9X630461X-50	Silicon Carbide	30µm	50	92.25

3M™ LAPPING FILM 6" X 6" SHEETS

PART #	MATERIAL	GRIT	PACK SIZE	PACK PRICE
DLF6X6.5661X-25	Diamond	.5µm	25	\$260.00
DLF6X601661X-25	Diamond	1µm	25	148.00
DLF6X603661X-25	Diamond	3µm	25	148.00
DLF6X606661X-25	Diamond	6µm	25	148.00
A06X6.05263X-50	Aluminum Oxide	.05µm	50	123.75
A06X603263X-50	Aluminum Oxide	3µm	50	69.95
A06X605261X-50	Aluminum Oxide	5µm	50	56.75
863X6X6NH-50	Final Polish		50	258.95

3M™ DIAMOND LAPPING FILM 3" X 6" SHEETS

PART #	GRIT	PACK SIZE	PACK PRICE
DLF3X601661X-25	1µm	25	\$139.95
DLF3X603661X-25	3µm	25	139.95



Attention Cable Assembly Houses FIS Proudly Offers Our

Cable Assembly Partnership Program (CAP)

FIS has joined with Manufacturers to offer preferred pricing and services under our Cable Assembly Partnership (CAP) Program. Cable Assembly Companies that qualify as CAP members will receive:

- Incredible pricing on cable, polish film, epoxy and connectors
- No quantity buys required
- Based on regular use of FIS and 3M products
- Limited memberships available
- Expanding product lines

Let Us Quote A 3 Step Polishing Solution!

With 20 years of cable assembly experience, FIS can show you how to achieve maximum value using specific 3M™ Lapping Films. The following are our current recommendations. The films highlighted above provide exceptional value in terms of pricing and performance.

Steps	3M™ 5" Disc Value	Mineral	Micron Size / Color
#1 De-Nub and Epoxy Removal	461X	Silicon Carbide	15µm / Gray
#2 Refine (Level Connector)	661X	Diamond	1µm / Lav 3µm / PNK 6µm / BRW
	662XW	Diamond	1µm / Lav 3µm / PNK 6µm / BRW
#3 Polish (Finish)	863XW	Silicon Dioxide	Final Polish/Translucent
	865X	Silica	Final Polish / White

FIS POLISH FILM-SOLD IN PACKS OF 25 SHEETS

When choosing polish film, you want to achieve two things; a high-quality end face finish, and maximum value for your money. FIS Polish Films provide both! Carefully graded abrasives are bonded with quality adhesives, enabling you to polish more connectors per sheet.

LARGE SHEETS 9" X 13"

PART #	MATERIAL	GRIT	COLOR	PACK SIZE	PACK PRICE
F1-0109-03	Aluminum Oxide	.3µm	White	25	\$52.95
F1-0109-1	Aluminum Oxide	1µm	Lt. Green	25	26.25
F1-0109-3	Aluminum Oxide	3µm	Pink	25	25.75
F1-0109-5	Silicon Carbide	5µm	Black	25	24.75
F1-0109-9	Aluminum Oxide	9µm	Lt. Blue	25	25.75
F1-0109-12	Aluminum Oxide	12µm	Dark Yellow	25	25.75
F1-0109-15	Silicon Carbide	15µm	Dark Grey	25	25.00
F1-0109-5-1-03	3 in 1 Film	(5, 1, .3µm)		25	42.50

STANDARD SHEETS 9" X 6.5"


PART #	MATERIAL	GRIT	COLOR	PACK SIZE	PACK PRICE
F1-0102-03	Aluminum Oxide	.3µm	White	25	\$29.95
F1-0102-1	Aluminum Oxide	1µm	Lt. Green	25	14.95
F1-0102-3	Aluminum Oxide	3µm	Pink	25	14.95
F1-0102-5	Silicon Carbide	5µm	Black	25	13.95
F1-0102-9	Aluminum Oxide	9µm	Lt. Blue	25	13.95
F1-0102-12	Aluminum Oxide	12µm	Dark Yellow	25	14.65
F1-0102-15	Silicon Carbide	15µm	Dark Grey	25	14.65

FIS DIAMOND POLISH FILM SHEETS (Sold in packs of 10.)

PART #	DESCRIPTION	GRIT	COLOR	PACK SIZE	PACK PRICE
F1-010715-10	3" x 6" Sheet	1µm	Violet	10	\$58.75
F1-010735-10	3" x 6" Sheet	3µm	Pink	10	51.95
F1-010730S-10	3" x 6" Sheet	30µm	Green	10	71.85

FIS MACHINE POLISHING DISCS (Sold in packs of 10 and 25 discs.)

PART #	SIZE	TYPE	GRIT	COLOR	PACK SIZE	PACK PRICE
F1-010705D-25	4" diameter	Aluminum Oxide	.05µm	Yellow	25	\$40.00
F1-01071DD-10	4" diameter	Diamond	1µm	Violet	10	41.50
F1-01073DD-10	4" diameter	Diamond	3µm	Pink	10	41.50
F1-01076DD-10	4" diameter	Diamond	6µm	Grey	10	41.50
F1-010730DD-10	4" diameter	Diamond	30µm	Green	10	44.95
F1-010805D	5" diameter	Aluminum Oxide	.05µm	Yellow	25	\$11.95
F1-01081DD-10	5" diameter	Diamond	1µm	Violet	10	55.75
F1-01083DD-10	5" diameter	Diamond	3µm	Pink	10	55.75
F1-01086DD-10	5" diameter	Diamond	6µm	Brown	10	55.75
F1-010830DD-10	5" diameter	Diamond	30µm	Green	10	59.25

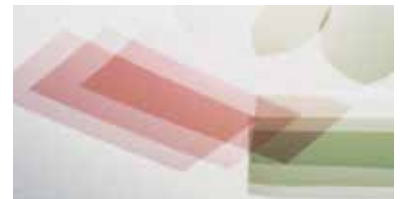

NEW



SFP-560A3C



SFP-560A3C - STANDARD PACKAGE

DESCRIPTION	PART #	QTY
Main Body	SFP-560A3C	1
2A Fuse (in fuse holder)	RP55-56	1
M3 x 60-SUS Bolt	M14-00096	2
Power Cable	RP55-30	1
Cable Hanger	FP-CH	1
USB Memory	FP-USB	1
Check Value	RP56A-24	1
Barcode Scanner	FP-SCN56-A	1
Operating Manual	FP-IM56A3C	1
Process Manual	FP-PM56A3C	1
Maintenance Manual	FP-MM56A3C	1



SFP-550C



SFP550C - STANDARD PACKAGE

DESCRIPTION	PART #	QTY
Main Body	SFP-550C	1
Cable Holder	FP-CH	1
Operating Manual	FP-IM12	1
Process Manual	FP-MM12	1
Maintenance Manual	FP-PM12	1
2A Fuse	FP-F2A	1
Hexagon Wrench	FP-TS	1



Polish Film



PH55-PL-72DHP



Polishing Pads



SFP-70D2 DUAL - STANDARD PACKAGE

DESCRIPTION	PART #	QTY
Main Unit	SFP-70D2-MT	1
Holder Weight for S/F Polishing	RP72-37SF	1
Holder Weight for MT Polishing	RP72-37MT-B	1
Accessories		
Cable Hanger	FP-HR	1
Allen Wrench Set	FP-TS	1
AC/DC Adapter + Cable	AD20	1
1 AMP Fuse	FP-F1A	10
Grease	FP-GS (27g)	1
Operational Manual	FP-IM70D2-DU	1



SFP-70D2-DUAL



SFP-70D2



RP72-37MT-B RP72-37SF



SPR-2

SPR-3

SFP-560A3C RUGGEDIZED POLISH MACHINE

The Seikoh Giken SFP-560A3C is a rugged, high-volume polisher built for continuous operation. With superior durability, low costs, and minimal maintenance, it ensures maximum uptime and ROI.

FEATURES

- Consumables input via barcode scanner & touch panel; tracks film life
- "Add time" feature ensures uniform polishing & extends film use
- Pressure ramp-up & Fixed Height Mode for each polishing step
- Adjustable speed: 10-200 rpm
- Dual network connection: Modbus TCP/IP

PART #	DESCRIPTION	PRICE
SFP-560A3C	SFP-560A3C Auto Clamping Polisher	\$22,164.50

SFP-550C MASS PRODUCTION POLISHING MACHINE

This high-performance polisher delivers superior quality and maximum throughput at an affordable price. Its patented high-speed rotation and revolution method ensures connectors exceed Telcordia GR-326 standards. Supports 18 connectors standard, up to 48 LC/MU. **ST & FC plates available call and speak with an FIS Sales Representative.**

FEATURES

- Compatible with all existing SFP series I.P.C. Holders
- Increased turntable speed
- Exceeds all requirements for GR-326 End-Face Geometry requirement

PART #	DESCRIPTION	PRICE
SFP-550C	SFP-550C Polisher with standard package, Auto Clamping Polisher	\$12,120.00
SFP-550E4	SFP-550E4 High Capacity Programmable Polisher with standard package	14,477.19
PH55-FP8RC-18-1	FC/APC Polish Fixture (18 position)	5,574.50
PH55-CP-20	SC/PC Polish Fixture (20 position)	4,025.00
PH55-CP8C-18	SC/APC Polish Fixture (18 position)	4,800.00
PH55-PL-24	LC Polish Fixture (24 position)	4,200.00
PH55-MT8A-24SQ1-B	MT/PC Polish Fixture, 24 Position (1mm Protrusion Type)	9,455.15
PH55-PL-72DHP	LC/PC Polish Fixture, 72-Axis, 36-Plug for Duplex	9,225.65
PH55-PL8A-66HP	LC/APC Polish Fixture, 66-Axis, Simplex	10,459.85
PH55-CP-48	SC/PC Polish Fixture, 48-Axis, Linear	7,692.30
PH55-CP-48R	SC/PC Polish Fixture, 48-Axis, Circular	7,692.30
PH55-CP8C-48	Conical SC/APC Polish Fixture, 48-Axis, Linear	8,547.00

NOTE: In order to the Ultra-Axis holders, need to purchase the Eccentric Drive Plate (1pc) and Eccentric Support Plate (3pc)

• Eccentric Drive Plate (1pc/Set): Models - SFP 550C (RP55C-08A); SFP-560A (RP56A-10A); SFP-550S3 and SFP-550EA (RP55S3-08A)

• Eccentric Support Plate (3pc/Set): Models - Common Among SFP-550C, SFP-550S3, SFP-550EC (RP55C-05A); SFP-560A Series (RP56A-07A)

ACCESSORIES FOR SFP-5** Series

PART #	DESCRIPTION	QTY.	PRICE
GA5D	30µm Silicon Carbide Adhesive Removal Film	500	\$210.95
EDR5D-9U	9µm Diamond Polish Film	20	98.95
EDG5D-5U	5µm Diamond Polish Film	20	98.95
EDH5D-3U	3µm Diamond Polish Film	20	88.00
EDI5D-1.5U	1.5µm Diamond Polish Film	20	88.00
EDJ5D-1U	1µm Diamond Polish Film	20	88.00
XF5D	0.5µm Silica Final Polish Film	100	210.00

Polishing Pads: 5" diameter rubber & glass pads for MT polishing are available in various hardness (60, 65, 70, 75, 80, 85 & 90 durometer) & thickness (4.8, 4.9, 5.0, & 5.05 mm). Call and Speak with an FIS Sales Representative to order.

SFP-70D2-DUAL & 70D2 POLISHING MACHINES

The Seikoh Giken SFP-70D2 polishes two ferrules at a time, ideal for labs and mass production re-polishing. Lightweight and portable, it's perfect for field use. **ST, FC & FC/APC plates available call and speak with an FIS Sales Representative.**

FEATURES

- Ergonomic, simple design for ease of use
- Short cycle times (2 min. typical for reworks)

PART #	DESCRIPTION	PRICE
SFP-70D2-DUAL	2-Axis Polisher for Single Fiber & Multi Fiber	\$4,849.60
SFP-70D2	Programmable Polisher with standard accessories	3,810.00
RP72-37SF	Holder Weight for Single Fiber	1,051.85
RP72-37MT-B	Holder Weight for MT Polishing	1,122.70
PH072-CP-2	SC/PC Polish Fixture (2 position)	500.00
PH072-CP8C-2	SC/APC Polish Fixture (Conical 2 position)	1,000.00
PH072-PL-2	LC/PC Polish Fixture	786.00

ACCESSORIES FOR SFP-70D2

PART #	DESCRIPTION	PACK QTY.	PACK PRICE
GA07	Height Adjustment Polishing Film	200	\$91.80
DR07-9U	9µm Diamond Rough Polishing Film	20	113.50
DH07-3U	3µm Diamond Medium Polishing Film	20	113.50
XF07	Final Polishing Film	100	226.95

AUTOMATIC DESKTOP CLEANER SPR-SERIES (FERRULE PRO™)

Ferrule Pro Series: Automatic desktop cleaner for high-performance ferrule and connector cleaning. No training needed. Compatible with select chucks and SPRP-10K cassette.

PART #	DESCRIPTION	PRICE
SPR-3	Auto Desktop Cleaner for Multi-Fiber ferrule/connector and Single-Fiber ferrule/connector	\$1,270.00
SPR-2	Auto Desktop Cleaner for Single-Fiber ferrule/connector	1,133.50
SPRP10K	Replacement Cleaning Cassette	115.00
SPR-H*	Various Holding Chucks for Specific Connector Style (FC, SC, ST, LC, MU, MDC, SN, MPO, and MT; PC/APC)	Call for Pricing

***NOTE:** Individual Holding Chucks are ordered by specific connector style for each holding chuck. Call and Speak with an FIS Sales Representative to order.



HAND POLISHING DISCS

The metal fiber optic polishing discs are especially durable and are machined to close tolerances. They are designed to hold your fiber optic endface at exactly the correct angle to the polishing film during the polishing process.

PART #	DESCRIPTION	PRICE
F1-6925UN	ST/SC/FC Universal 2.5mm Polish Disc (C)	\$50.00
F1-6925ST	ST Polish Disc (D)	50.00
F1-6977ST	ST 4 Position Polish Disc (A)	150.00
F1-6928SC	SC Polish Disc (E)	50.00
F1-6928APC	SC/APC Polish Disc (B)	75.00
F1-6925FC	FC/PC Polish Disc	50.00
F1-6925FCAPC	FC/APC Polish Disc	75.00
F1-6930UN	MU/LC Polish Disc (F)	50.00
F1-6900APC	LC/APC Polish Disc	75.00
F1-6925SMA	SMA Polish Disc	50.00
F1-6926	D4 Polish Disc	85.00

ULTRA PRECISION POLISHING PADS

Ultra Pads are color coded for easy recognition by the machine operators. 4" and 5" discs are .079" thick and 6" x 6" squares are 0.250" thick.


PART #	DESCRIPTION	PRICE
F1-70D4	4" Circular Rubber Pad 70 Durometer (purple)	\$25.00
F1-90D4	4" Circular Rubber Pad 90 Durometer (black)	25.00
F1-70D5	5" Circular Rubber Pad 70 Durometer (purple)	25.00
F1-90D5	5" Circular Rubber Pad 90 Durometer (black)	25.00
F1-70DX6	6" x 6" Square Rubber Pad 70 Durometer (purple)	25.00
F1-90DX6	6" x 6" Square Rubber Pad 90 Durometer (black)	25.00



POLISH PLATES, PADS AND MATS

The polishing of fiber optic connectors calls for both a hard flat surface and a cushioned pad. The 9" x 13" or 6" x 9" polish plate is available in safety glass and mounted on four rubber feet for support. When polishing PC style pre-radius connectors, use the soft polish pad on the glass plate. Placing the lapping film over the pad assures the removal of epoxy and proper polish of fiber without destroying the pre-radius of the ferrule.

PART #	DESCRIPTION	PRICE
F1-9111	FIS Polish Glass Plate (9" x 13") (A)	\$29.95
F1-9111A	FIS Polish Glass Plate (6" x 9") (B)	21.95
PP-575	5.75" Square Polishing Pad, 1/16" Thick 70 Durometer (C)	9.25
F1-0024	Large Black Work Mat (22" x 14") (D)	10.65
PPG-575	5.75" Square Polishing Pad with 1/4" Acrylic Plate (not pictured)	20.75

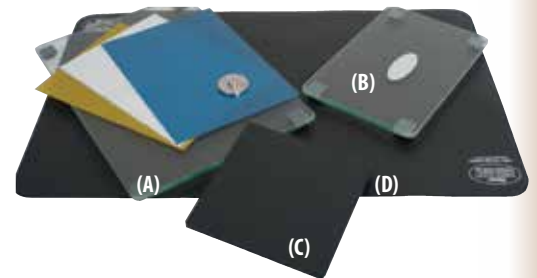

DID YOU KNOW...

What is meant by the term "Air Polish"?

After curing an epoxy connector and removing from oven the exposed fiber tip is typically scribed and picked off, then disposed in shards container. The remaining small tip of fiber then left protruding out the end of the ferrule is removed by an "Air Polish". Refer to manufacturer termination instructions but often a 5um silicon carbide film is utilized and by holding the connector in one hand and the film in the opposite hand technician can "Air Polish." Gently brush the dull looking side of the film with exposed fiber tip in a "figure 8" motion until the fiber tip is almost flush with the ferrule endface. Often you will also remove some of the epoxy bead but be sure to stop prior to removing the entire epoxy bead as the following polish steps to not use an aggressive grit size to remove scratches below ferrule tip.



F1-8705-CSTSCS
ST (male) - SC (female) (Singlemode)
Metal Housing
Zirconia Sleeve
\$25.00



F1-8705-CSCFCS
SC (male) - FC (female) (Singlemode)
Polymer Housing
Zirconia Sleeve
\$25.00



F1-8705-CSTFCS
ST (male) - FC (female) (Singlemode)
Metal Housing
Zirconia Sleeve
\$25.00



F1-8705-SCSCS
SC (male) - SC (female) (Singlemode)
Polymer Housing
Zirconia Sleeve
\$25.00



F1-8705-CSCST
SC (male) - ST (female) (62.5/125µm)
Polymer Housing
Zirconia Sleeve
\$20.00



F1-8705-STST
ST (male) - ST (female) (62.5/125µm)
Metal Housing
Zirconia Sleeve
\$20.00



F1-FCLCMF
FC (male) - LC (female) (Singlemode)
Metal Housing
Zirconia Sleeve
\$35.00



F1-LCSCMF
LC (male) - SC (female) (Singlemode)
Polymer Housing
Zirconia Sleeve
\$28.95



F1-SCLCMF
SC (male) - LC (female) (Singlemode)
Polymer Housing
Zirconia Sleeve
\$28.95



**OPTITAP®
HYBRID ADAPTER
KTOPTADPT**

OptiTap® Hybrid Adapter (OptiTap / SCAPC)
\$18.95



F1-8705-CSCSTS
SC (male) - ST (female) (Singlemode)
Polymer Housing
Zirconia Sleeve
\$25.00



F1-8705-CFCSCS
FC (male) - SC (female) (Singlemode)
Metal Housing
Zirconia Sleeve
\$28.95



F1-4732
SMA905 (female) - ST (female) (SM/MM)
Metal Housing
Zirconia Sleeve
\$25.00



F1-29202
ST (female) - FC (female) (SM/MM)
Metal Housing
Zirconia Sleeve
\$3.95



F1-19202
SC (female) - ST (female) (SM/MM)
Metal Housing
Zirconia Sleeve
\$2.95




F1-34202
SC (female) - FC (female) (SM/MM)
Metal Housing
Zirconia Sleeve
\$3.75




F1-2821CC
FC/APC (female) - SC/APC (female) (Square Flange)
Metal Housing
Zirconia Sleeve
\$4.75



F1-2822CC
FC/APC (female) - SC/APC (female) (Rectangular Flange)
Metal Housing
Zirconia Sleeve
\$4.75

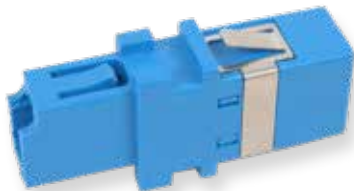

F1-SCLFF
SC (female) - LC (female)
Polymer Housing
Zirconia Sleeve
\$23.95

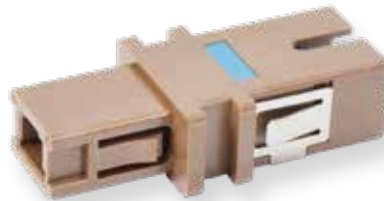

F1-SCMUFF
SC (female) - MU (female)
Polymer Housing
Zirconia Sleeve
\$35.00



F1-LCMUFF
LC (female) - MU (female) (SM/MM)
Polymer Housing
Zirconia Sleeve
\$23.95

FIS SINGLEMODE FIBER OPTIC ADAPTER KIT

The FIS fiber optic adapter kit provides installers with all the popular mating sleeves to test or plug in fiber optic cables. **Perfect for Installers. Singlemode adapters work for multimode connectors.**


PART #	DESCRIPTION	PRICE
F1-ADPTKIT	FIS Adapter Kit (includes 24 adapters)	\$80.00

KIT CONTENTS (CONTAINS TWO OF EACH):

LC-LC, LC/APC-LC/APC, SC-SC, SC/APC-SC/APC, ST-ST, FC-FC, FC/APC-FC/APC, FC/APC-SC/APC, SC-FC, FC-ST, SC-ST, MU-MU




Custom
Kits
Available



F1-3810BC
Singlemode - Blue
SC - Style 3
Polymer Housing
Zirconia Sleeve
\$2.00



F1-8601
Duplex Singlemode - Blue
SC - Style 3
Polymer Housing
Zirconia Sleeve
\$3.50



F1-8601NF
Duplex Singlemode - Blue (No Flange)
SC - Style 5
Polymer Housing
Zirconia Sleeve
\$2.25




Premium Grade
F1247101
No Flange
Simplex SCUPC
Blue polymer
Zirconia Sleeve
Exceeds GR326 CORE Standard
\$2.70



F1-4800T
Singlemode APC - Green
SC - Style 3
Polymer Housing
Zirconia Sleeve
\$2.00



F1-4800NF
Singlemode APC - Green (No Flange)
SC - Style 5
Polymer Housing
Zirconia Sleeve
\$1.25



F1-8701
Duplex Singlemode APC - Green
SC - Style 3
Polymer Housing
Zirconia Sleeve
\$3.75



Premium Grade
F1247111
No Flange
Simplex SCAPC
Green Polymer
Zirconia Sleeve
Exceeds GR326 CORE Standard
\$2.95



F1-8701NF
Duplex Singlemode APC - Green
(No Flange)
SC - Style 5
Polymer Housing
Zirconia Sleeve
\$1.25



F1-8650
Duplex Multimode - 10 Gig - Aqua
SC - Style 3
Polymer Housing
Zirconia Sleeve
\$3.25



F1-8350NF
Multimode - 10 Gig - Aqua (No Flange)
SC - Style 5
Polymer Housing
Zirconia Sleeve
\$1.00




Premium Grade
F1247191
No Flange
Simplex SC Multimode OM3
Aqua Polymer
Zirconia Sleeve
Exceeds GR326 CORE Standard
\$2.95



Premium Grade
F1247121
No Flange
Simplex SC Multimode
Beige Polymer
Zirconia Sleeve
Exceeds GR326 CORE Standard
\$2.95



F1-8600ET
Duplex Multimode - Beige (No Flange)
SC - Style 5
Polymer Housing
Phos. Bronze Sleeve
\$2.75



F1-SCRD
Duplex Singlemode - Blue (No Flange)
SC - Style 5 with Shutter
Polymer Housing
Zirconia Sleeve
\$5.25



F1-8620
Duplex Multimode - Black
SC - Style 3
Polymer Housing
Phos. Bronze Sleeve
\$2.75

**Call Your FIS Sales Representative
for availability of other adapters!**



F18005NF
Singlemode-Blue
(No Flange)
LC - Style 5
Polymer Housing
Zirconia Sleeve
\$1.35



F1-8035
Duplex Singlemode-Blue
LC - Style 3
SC Footprint
Polymer Housing
Zirconia Sleeve
\$3.10



F1-8050NF
Duplex Multimode-10
Gig Aqua (No Flange)
LC - Style 5
SC Footprint
Polymer Housing
Zirconia Sleeve
\$2.00



F1-8010NF
Duplex Singlemode-Blue
(No Flange), Square
LC - Style 5
Polymer Housing
Zirconia Sleeve
\$2.00



F1-8411NF
No Flange
Duplex LCUPC
SC Footprint
Polymer Housing
Zirconia Sleeve
Exceeds GR326 CORE Standard
\$2.98

Premium Grade

Premium Grade



F18411NFT
No Flange
Duplex LCUPC w/Internal
Shutter
SC Footprint
Polymer Housing
Zirconia Sleeve
Exceeds GR326 CORE Standard
\$4.70



F1-8008
Singlemode-APC-Green
LC APC-Style 5
Polymer Housing
Zirconia Sleeve
\$1.35



F1-8018
Duplex singlemode APC-Green
LC APC
Style 3-SC Footprint
Polymer Housing
Zirconia Sleeve
\$3.79




F1-8015NF
Duplex Singlemode APC-Green
(No Flange)
LC APC-Style 5
SC Footprint
Polymer Housing
Zirconia Sleeve
\$1.75



F1-8431NF
No Flange
Duplex LCAPC
SC Footprint
Polymer Housing
Zirconia Sleeve
Exceeds GR326 CORE Standard
\$2.98

Premium Grade

Premium Grade



F1-8431NFT
No Flange
Duplex LCAPC w/Internal
Shutter
SC Footprint
Polymer Housing
Zirconia Sleeve
Exceeds GR326 CORE Standard
\$4.70



F1-8000A
Multimode-Beige
(No Flange)
LC - Style 5
Polymer Housing
Phos. Bronze Sleeve
\$1.50



F1-8030
Duplex Multimode-Beige
LC - Style 3
SC Footprint
Polymer Housing
Phos. Bronze Sleeve
\$3.25



F1-8020CNF
Duplex Multimode-Beige
(No Flange), Square
LC - Style 5
Polymer Housing
Zirconia Sleeve
\$2.25



F1-8050
Duplex MM-10 Gig-Aqua
LC - Style 3
SC Footprint
Polymer Housing
Phos. Bronze Sleeve
\$3.00



F1-8045NF
Quad Singlemode-Blue (No Flange)
LC - Style 5
SC Duplex Footprint
Polymer Housing
Zirconia Sleeve
\$4.50



F1-8040
Quad Multimode-Beige
LC - Style 3
SC Duplex Footprint
Polymer Housing
Phos. Bronze Sleeve
\$5.00



F1-8041
Quad Multimode-10 Gig-Aqua
LC - Style 3
SC Duplex Footprint
Polymer Housing
Phos. Bronze Sleeve
\$5.00




1102-0000100

92470A099100


1102-0000100 Stainless Phillips Head Machine Thread Screws for Flanged Adapters 5/16" (8mm) Length 100/pack **\$15.50**

92470A099100 Stainless Phillips Head Tapping Thread Screws for Flanged Adapters 5/16" (8mm) Length 100/pk **\$15.50**


Please refer to "style" Columns when making your selection.




Floating Style 1




Threaded Style 2



Flanged Style 3



Rectangular Flanged Style 4



No Flanged Style 5

ST



F1-8102SS

ST



8119

ST



6113

ST



106110-1000

FC



F1-8501S

FC



F1-8520

FC



8211APC

FC



106152-0100

MT-RJ



F1-890M

MU



F1-5910S

MU



F1-5915

ST ADAPTERS

PART #	TYPE	STYLE	HOUSING	SLEEVE	PRICE
F1-8102SS	Multimode	2	Metal	Phos. Bronze	\$1.30
F1-8200A	Singlemode	2	Metal	Zirconia	1.30

CORNING

6112	Multimode	2	Metal	Phos. Bronze	\$3.60
6113	Duplex Multimode	2	Metal	Phos. Bronze	6.50

MT-RJ ADAPTERS

PART #	TYPE	STYLE	HOUSING	PRICE
F1-890M	SM / MM	SC Footprint	Polymer	\$1.65

FC ADAPTERS

PART #	TYPE	STYLE	HOUSING	SLEEVE	PRICE
F1-8501SZ	Multimode	4	Metal	Zirconia	\$2.50
F1-8520	SM / MM	2	Metal	Zirconia	3.50
F1-8521S	Singlemode - APC	4	Metal	Zirconia	3.75
F1-8525	Singlemode - APC	2	Metal	Zirconia	3.75

CORNING

8211	Singlemode	2	Metal	Zirconia	\$6.95
8211APC	Singlemode - APC	2	Metal	Zirconia	7.65

MOLEX

106152-1000	SM / MM	2	Metal	Zirconia	7.25
106152-3000	Singlemode - APC	2	Metal	Zirconia	8.55

MU ADAPTERS

PART #	TYPE	HOUSING	SLEEVE	PRICE
F1-5910S	Singlemode	Simplex - Polymer	Zirconia	\$5.95
F1-5915	Singlemode	Duplex - Polymer	Zirconia	6.70

Multimode
Available
Call For More
Information

FC/UPC



F1-8721AXX

SC/UPC



F1-8731AXX

MU/UPC



F1-9521AXX

ST/UPC




F1-9621AXX

FC/APC



F1-8751AXX

SC/APC



F1-8741AXX

LC/APC



F1-8761AXX

LC/APC



F1-8771AXX

SINGLEMODE MALE-TO-FEMALE ATTENUATORS

FIS male-to-female attenuators contain doped fiber suitable for both Singlemode wavelengths 1310nm and 1550nm operation. Fixed attenuation values are available in 1dB increments from 1 to 20dB. FIS stocks standard 5, 10, 15, 20dB attenuation levels in most styles.

Attenuation Tolerance: 1 to 10dB $\pm$ 0.5dB; 11 to 30dB $\pm$ 5% | Operating Temperature: -40°C to +75°C | ORL: UPC $\geq$ 55dB / APC $\geq$ 65dB

TO SPECIFY ATTENUATION LEVEL REPLACE "XX" with desired attenuation level ex. 01=1dB, 02=2dB, 03=3dB, 04=4dB, etc. (Attenuators up to 20dB in stock.)

PART #	DESCRIPTION	PRICE
F1-8721AXX	FC/UPC Male to Female Attenuator	\$10.25
F1-8751AXX	FC/APC Male to Female Attenuator	11.95
F1-8731AXX	SC/UPC Male to Female Attenuator	10.25
F1-8741AXX	SC/APC Male to Female Attenuator	11.95
F1-9621AXX	ST/UPC Male to Female Attenuator	10.25
F1-8761AXX	LC/UPC Male to Female Attenuator	11.95
F1-8771AXX	LC/APC Male to Female Attenuator	13.95
F1-9521AXX	MU/UPC Male to Female Attenuator	13.95

FIS SINGLEMODE BULKHEAD FEMALE-TO-FEMALE ATTENUATORS

FIS Bulkhead Attenuators utilize a wavelength sensitive neutral density filter to achieve attenuation. Available in 5, 10, 15 and 20dB values. Select from 1310nm or 1550nm options.

Attenuation Tolerance: 1 to 10dB $\pm$ 0.5dB; 11 to 30dB $\pm$ 5% | Operating Temperature: -40°C to +75°C | ORL: UPC $\geq$ 55dB / APC $\geq$ 65dB



SC



ST

ST ATTENUATOR 1310nm/1550nm

PART #	DESCRIPTION	PRICE
F18125SF	FIS ST Bulkhead Attenuator SM 1310/1550nm 5dB	\$10.95
F18126SF	FIS ST Bulkhead Attenuator SM 1310/1550nm 10dB	10.95
F18127SF	FIS ST Bulkhead Attenuator SM 1310/1550nm 15dB	10.95
F18128SF	FIS ST Bulkhead Attenuator SM 1310/1550nm 20dB	10.95

SC ATTENUATOR 1310nm/1550nm

PART #	DESCRIPTION	PRICE
F18325SF	FIS SC SM Bulkhead Attenuator 1310/1550nm 5dB	\$10.95
F18326SF	FIS SC SM Bulkhead Attenuator 1310/1550nm 10dB	10.95
F18327SF	FIS SC SM Bulkhead Attenuator 1310/1550nm 15dB	10.95
F18328SF	FIS SC SM Bulkhead Attenuator 1310/1550nm 20dB	10.95

FIS BULK MATING SLEEVE ADAPTERS

FIS multimode and singlemode ST, SC, LC and FC adapters bulk packaged in lots of 100 pieces. These adapters offer the best value in performance and cost savings.

PART #	DESCRIPTION	PRICE
F1-8102SS-100	FIS MM ST - (100 pk.)	\$117.00
F1-8200A-100	FIS SM ST - (100 pk.)	117.00
F1-8020NF-100	FIS MM LC Duplex - (100 pk.), Beige, Square Footprint	200.00
F1-8010NF-100	FIS SM LC Duplex - (100 pk.), Blue, Square Footprint	200.00
F1-8520-100	FIS SM FC Style 2 - (100 pk.)	300.00
F1-3800BC-100	FIS MM SC Beige - (100 pk.)	90.00
F1-3810BC-100	FIS SM SC Blue - (100 pk.)	157.00
F1-4800BC-100	FIS SM SC/APC Green - (100 pk.)	200.00
F1-8600ET-100	FIS MM SC Duplex - (100 pk.), Beige	250.00



F1-3800BC-100

Other part
numbers
available upon
request



F1-0031-40C

VARIABLE ATTENUATORS

This Variable Attenuator uses collimator lens technology enabling the user to change attenuation through the twist of a top-mounted screw. Use this variable attenuator to simulate the loss in a fiber system or testing your system's dynamic range. A power meter and light source can be used to determine the fixed attenuation value your system requires. The attenuator has a 0.8dB typical insertion loss and is available in a 2 meter length and may be connectorized. A low back reflection style is prepared with ultra PC connectors maintaining the internal low back reflection characteristics. Attenuation range: 0.8dB to 60dB.

PART #	DESCRIPTION	PRICE
F1-0031-40C	SM Attenuator 8-9µm Core (2 Meter Unconnectorized) Return Loss <-40dB	\$150.00
F1-1033-35C	MM Attenuator 62.5µm Core (2 Meter Unconnectorized) Return Loss <-35dB	225.00
F1-0031-LBR	SM Low Back Reflection Attenuator with FC/UPC Connector Return Loss <-50dB	175.00



F1-2250

AIR-GAP VARIABLE ATTENUATORS

The Air-Gap Variable Attenuator has a ceramic alignment sleeve that provides a low insertion loss of .15dB and can be used on both multimode and singlemode applications. Included tool provides ability to increase attenuation to desired "level". Device may replace mating sleeve at the patchpanel, enabling variable attenuation levels to be introduced to the system. Attenuation range is 0dB to 20dB.

PART #	DESCRIPTION	PRICE
F1-2250	Air-Gap Variable ST Attenuator	\$62.75
F1-2251	Air-Gap Variable FC Attenuator	62.75



FIS IN-LINE FIXED ATTENUATORS

The FIS In-Line Fixed Attenuator is built to meet your low reflection attenuation requirements. Each cord is custom built to accommodate up to 10 meters of cable and the connector styles of your choice. The 5dB and 10dB versions hold a +/- .5dB tolerance with the 15dB and 20dB holding a 1dB tolerance. Please specify operating wavelength. The in-line attenuator provides negligible back reflection and is therefore recommended for use with UPC or APC style patch cable.

PART #	DESCRIPTION	PRICE
F1-ATS + 5dB or 10dB	In-line Attenuator	patch cable price + \$39.00
F1-ATS + 15dB or 20dB	In-line Attenuator	patch cable price + 49.00



TYPICAL ATTENUATION LEVELS (Installed At Light Source)

COLOR	850nm (dB)	1300nm (dB)
Red	2.5	7.4
Blue	3.6	9.1
Green	4.8	10.2
Gold	5.5	11.3
Silver	6	11.7

FIS ST, SMA OR FDDI FIXED ATTENUATORS

The washer style attenuator is placed at the light source, spacing the mated connectors to cause attenuation. The attenuators of various thicknesses are not assigned specific dB values, several factors will dictate actual loss.

PART #	DESCRIPTION	PRICE
A450-FIS	ST Attenuators (Qty. 5) 1 Each Color	\$13.95 set
A40D-FIS	SMA Attenuators (Qty. 5) 1 Each Color	13.95 set
A450-FDDI	FDDI Attenuators (Qty. 10) 2 Each Color	28.95 set
A450-20	ST Attenuators (Qty. 10), State Color	28.95
A40D-20	SMA Attenuators (Qty. 10), State Color	28.95

DID YOU KNOW...

ADSS

ADSS stands for All Dielectric Self Supporting. All Dielectric means that the cable is constructed without metal components so it will not conduct electricity. Self Supporting means that the cable will be held in place by very specialized hardware which will spread the force required to secure the cable by the jacket over a distance. Since no metal components exist for support the entire cable is supported by the hardware and jacket. Common applications for ADSS cable include Cellular Backhaul Networks, Power Utility Grids and projects that have substantial grade change over long distances.

The design of ADSS cable and hardware is specific for each application. Very specific information about the installation is required when ordering cable and hardware. **Specifications regarding Cable Part Number, Loading, Span Length, Power Zone Voltage and Cable O.D. will be required in order to quote properly. Typically manufacturers will not provide quote without the proper information.**



FIBER FENCE Security System

Your application may be perimeter fence monitoring or delivering a no-spark sensor signal miles in distance for detection. Utilizing an infrared light source through optical fiber is a cost effective reliable solution. Zone mapping software constantly alerts you of a zone violation. Call FIS and we design and quote your security system for you.

FIBER FENCE

SECURITY SYSTEM™

APPLICATIONS



AGRICULTURE




MANHOLE
COVERS



MINING
OPERATIONS



NO SPARK
ENVIRONMENTS



PIPELINES, RAILS,
BRIDGES



CHEMICAL
PLANTS

OUTDOOR LONG DISTANCE SECURITY

Call 800-5000-FIS(347) to Design and Quote Your Security System.

Monitor
10 Acres For
Less Than
\$1,000

FIBER FENCE 10 ACRE KIT

The kit contains everything you need to monitor a 10 acre perimeter. You receive a Zone Control Unit, 53 Mini Mouse trips, 4 Corner Guards, 3,000ft FIBER FENCE fiber, zip ties, and an Instruction Manual. We can help with your design and other fiber optic tools and products.

PART #	DESCRIPTION	PRICE
OMS-FF10KIT	Fiber Fence 10 Acre Kit	\$995.00

ZONE CONTROL UNIT

The heart of the FIBER FENCE Security System is the Zone Control Unit. A powerful laser sends light to the fence and sensors. The Zone Control Unit utilizes 9v DC power and may be rack mounted in a remote location. The Zone Control Unit is available in the 23dB range 1310nm single mode fiber coupled laser version.

PART #	DESCRIPTION	PRICE
OMS-CML	Zone Control Unit (10 mile range)	\$495.00

OPTI-MAG SENSOR - THE "COVER COP"

The "Cover Cop" is sealed and contains a powerful internal magnet and spring mechanism. It is mounted in the specified proximity to the selected target (i.e. door, manhole cover or gate). When the target is moved away from the sensor, attenuation is created thus triggering the Zone Control Unit. Each "Cover Cop" is rated for approximately 10,000 cycles.

PART #	DESCRIPTION	PRICE
OMS-PRX	FIBER FENCE Opti-Mag Proximity Sensor	\$105.00

FIBER FENCE MINI MOUSE TRIP SENSOR

The Mini Mouse Trip is a passive sensor designed to be mounted to the fence. It secures the fiber to the fence and will create attenuation triggering an alarm when the fiber or fence is disturbed. The sensor does not require a manual reset.

PART #	DESCRIPTION	PRICE
OMS-MMT	FIBER FENCE Mini Mouse Trip Sensor	\$5.95

FIBER FENCE MOUSE TRIP™ SENSOR

The Mouse Trip sensors are designed to be mounted to the fence and are tripped when the fence is disturbed. Triggered sensors must be reset.

PART #	DESCRIPTION	PRICE
OMS-MT	FIBER FENCE Mouse Trip Sensor	\$69.00

ZONE MAPPING SOFTWARE

The Zone Mapping Software allows the user to input a map and identify the perimeter with multiple zones. Each zone is protected by a Zone Control Unit. The software can also send text or e-mail messages for alarms and resets if the computer has internet access.

PART #	DESCRIPTION	PRICE
OMS-ZMAP	Zone Mapping Software	\$350.00

FIBER CABLE

The 900µm specially jacketed fiber cable can be customized to include connectors, Loop-Back modules to return to the Control Unit, and cut to length upon request.

PART #	DESCRIPTION	PRICE
OMS-SMPX	Simplex Bend Sensitive FIBER FENCE Singlemode Fiber	.45 per mt
OMS-DPX	Duplex Bend Sensitive FIBER FENCE Singlemode Fiber	.65 per mt
OMS-CNG	Corner Guard	\$7.50



OMS-CML



OMS-PRX



OMS-MMT



OMS-MT




OMS-ZMAP

Note: When possible, additional technical assistance for your specific application may be available. Installers are solely responsible for the actual installation of the system.

Manufactured Ferrules and Custom Connectors to Receive Oversized Variable Fiber Diameters

Many applications require ferrules only, or not mounted into the ST, SC, FC or SMA style connectors. Select from our “**Stock Ferrule Sizes**” that we offer in four sizes below, which provides the best tolerances at no minimum purchase. If your fiber diameter size requirements are different, see Standard and Premium selections below.

Typical Ferrule Dimensions

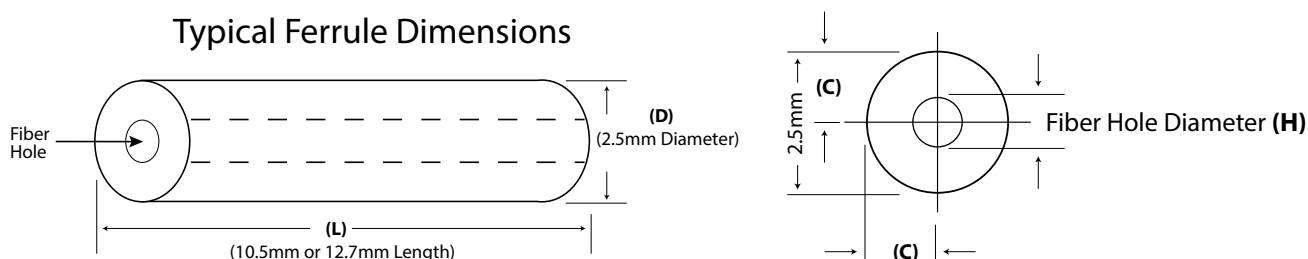

Material: Stainless Alloy

Diameter (D) – All Ferrules Offered Are 2.5mm Diameter

STOCK FERRULE SIZES

Fiber Hole Diameter (H)	Hole Tolerance	Concentricity (C)	Length (L)	Diameter (D)
127μm	-0/+10μm	25μm	10.5mm & 12.7mm	2.5mm
140μm	-0/+10μm	25μm	10.5mm & 12.7mm	2.5mm
230μm	-0/+10μm	25μm	10.5mm & 12.7mm	2.5mm
1000μm	-0/+20μm	25μm	10.5mm & 12.7mm	2.5mm

Purchasing Information

No Minimum Purchase | \$2.30 each | Quantity Discounts Available | \$57.50/25 Pack
Ex: FD-SF-1000-127 (Stock Ferrule, 1000μm, 12.7mm Length)

STANDARD DRILLED FERRULES

Fiber Hole Diameter (H)	Hole Tolerance	Concentricity (C)	Length (L)	Diameter (D)
127μm to 1300μm	-0/+50μm	50μm	10.5mm & 12.7mm	2.5mm

Purchasing Information

Minimum Purchase 25 | No Charge for Drill Bit If Inventoried | Add \$50 If Not Listed and 6 week Lead Time
\$3.25 each | Quantity Discounts Available
Ex: FD-SD-0500-105 (Standard Drilled Ferrule, 500μm, 10.5mm Length)

PREMIUM DRILLED FERRULES

Fiber Hole Diameter (H)	Hole Tolerance	Concentricity (C)	Length (L)	Diameter (D)
127μm to 490μm	-0/+10μm	25μm	10.5mm & 12.7mm	2.5mm
500μm to 990μm	-0/+15μm	25μm	10.5mm & 12.7mm	2.5mm
1000μm to 1500μm	-0/+20μm	25μm	10.5mm & 12.7mm	2.5mm

Purchasing Information


Minimum Purchase 500 | No Charge for Drill Bit If Inventoried | Add \$50 If Not Listed and 6 week Lead Time
\$3.95 each | Quantity Discounts Available | \$325 Setup for <500
Ex: FD-PD-0230-105 (Premium Drilled Ferrule, 230μm, 10.5mm Length)

Note: Large Quantity Requirements of Different Diameter and Lengths Are Available.

Drill Sizes Inventoried

127µm	210µm	270µm	330µm	360µm	440µm	520µm	580µm	660µm	740µm	850µm	1010µm	1120µm
130µm	220µm	280µm	335µm	370µm	450µm	525µm	590µm	670µm	750µm	860µm	1015µm	1200µm
140µm	225µm	290µm	340µm	380µm	460µm	530µm	600µm	680µm	760µm	890µm	1020µm	1250µm
150µm	230µm	295µm	350µm	390µm	470µm	540µm	610µm	690µm	770µm	900µm	1030µm	1270µm
160µm	240µm	300µm	330µm	400µm	480µm	550µm	620µm	700µm	800µm	930µm	1040µm	1370µm
170µm	250µm	310µm	335µm	410µm	490µm	570µm	630µm	710µm	810µm	970µm	1050µm	1500µm
180µm	260µm	320µm	340µm	420µm	500µm	550µm	640µm	720µm	830µm	990µm	1080µm	1525µm
190µm	265µm	325µm	350µm	430µm	510µm	570µm	650µm	730µm	840µm	1000µm	1100µm	

Creating Your 2.5mm Diameter Ferrule Part Number

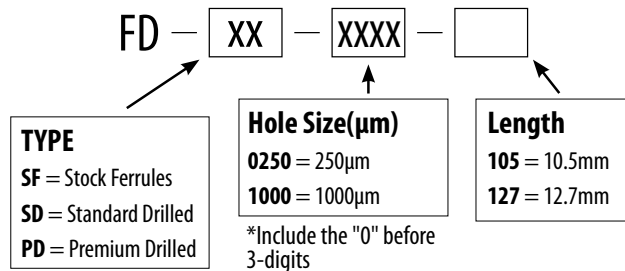

Ex: FD - SD - 0250 -105
(Standard Drilled Ferrule, 250µm, 10.5mm Length)

Custom Connectors

Your custom ferrule mounted in a standard style fiber optic connector creates your custom connector. Expect low loss connections when using these standard connectors with available low cost mating sleeves. Quantity discounts are available.


			
ST Connector	SC Connector	FC Connector	SMA905 Connector
12.7mm Ferrule Only	10.5mm Ferrule Only	10.5mm Ferrule Only	3mm Diameter Ferrule, Produced by drilling a larger hole size to a 125µm standard SMA905
Connector: \$3.50 Plus Ferrule: \$3.25 (SD) / \$3.75 (PD)	Connector: \$3.95 Plus Ferrule: \$3.25 (SD) / \$3.75 (PD)	Connector: \$4.45 Plus Ferrule: \$3.25 (SD) / \$3.75 (PD)	Connector: \$6.25 Plus Ferrule: \$3.25 (SD)

Quantity Discounts Available

Mating Sleeve Part Numbers

Connector Type	Part Number	Price
ST	F1-8102SS	\$0.85
SC	F1-3810BC	\$2.00
FC	F1-8501SZ	\$2.50
SMA	F1-93330	\$8.35

Create Your Custom Drilled Connector

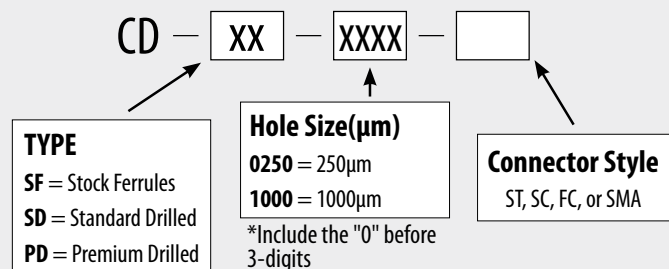

Ex: CD - PD - 1000 -ST
(Premium Drilled Ferrule, 1000µm, ST Connector)



CAT 6 AND CAT 5e PATCH CABLES

FEATURES:

- Meet or Exceed Performance Standards
- 4-pair Stranded Unshielded, 24 AWG Conductor Cables
- Non-Plenum (CMR) Rated
- Pre-terminated with 8 Position RJ 45 Plug
- Available in a Variety of Lengths and Colors
- Universal Wiring ANSI/TIA T568A/T568B Standards



CATEGORY 5e STRANDED UNSHIELDED PATCH CABLE WITH SNAGLESS BOOTS

FIS

PART #	LENGTH	PRICE
CT-6080-03-XX	3ft	\$1.60
CT-6080-05-XX	5ft	2.05
CT-6080-07-XX	7ft	2.45
CT-6080-10-XX	10ft	3.20
CT-6080-15-XX	15ft	4.40
CT-6080-25-XX	25ft	6.65

(Note: When ordering the above Cat 5e cords, replace XX with color: BK=Black, BU=Blue, GN=Green, GY=Gray, OR=Orange, RD=Red, WH=White, YE=Yellow)

CATEGORY 6 STRANDED, UNSHIELDED PATCH CABLE WITH SNAGLESS BOOT

FIS

PART #	LENGTH	PRICE
CT-6081-03-XX	3ft	\$2.05
CT-6081-05-XX	5ft	2.65
CT-6081-07-XX	7ft	3.20
CT-6081-10-XX	10ft	4.85
CT-6081-15-XX	15ft	5.50
CT-6081-25-XX	25ft	8.40

(Note: When ordering the above Cat 6 cords, replace XX with color: BK=Black, BU=Blue, GN=Green, GY=Gray, OR=Orange, RD=Red, WH=White, YE=Yellow)



CATEGORY 6™ BULK 4 PAIR CABLE

HITACHI

PART #	DESCRIPTION	PRICE
30024-8-XX-2	CAT6 UTP Riser Cable (CMR) - 550MHz	CALL
30237-8-XX-2	CAT6 UTP Plenum Cable (CMP) - 550MHz	CALL



CATEGORY 6 BULK 4 PAIR CABLE

PART #	DESCRIPTION	PRICE
6A234UTPRM3-X	CAT 6 23awg Riser Cable - 250MHz	CALL
6B234UTPM3-X	CAT 6 23awg Plenum Cable - 250MHz	CALL
6B234UTPENHM3-X	CAT 6 23awg Plenum Cable - 550MHz	CALL



CATEGORY 5e BULK 4 PAIR CABLE

HITACHI

PART #	DESCRIPTION	PRICE
38696-8-XX-2	CAT 5e UTP Riser Cable (CMR) - 400MHz	CALL
39419-8-XX-2	CAT 5e UTP Plenum Cable (CMP) - 400MHz	CALL



CATEGORY 5e BULK 4 PAIR CABLE

PART #	DESCRIPTION	PRICE
5AE244UTPRM2-X	CAT 5e Riser Cable - 100MHz	CALL
5BE244UTPM2-X	CAT 5e Plenum Cable - 350MHz	CALL
5BE244UTP350M2-X	CAT 5e Plenum Cable - 350MHz	CALL

(Note: When ordering, replace XX with BK = Black, BL = Blue, BR = Brown, GA = Gray, GR = Green, RD = Red, WH = White, and YE = Yellow.)

CUSTOM COPPER ASSEMBLIES:

Custom Cat 3, 5e, 6 and 6A Patch Cords can be made with or without snagless boots. Available in Black, Blue, Green, Pink, Purple, Red, White, and other colors. Each patch cord is tested and verified to ensure performance per TIA standards.

- Any Length
- Any Wiring Configuration
- Any Color
- Booted or Non-Booted

- Labeling Available
- You Provide the Spec
- Cross-over also Available

Other Copper assemblies are available.

Call for more information!

DSX CABLE ANALYZER

The DSX CableAnalyzer Series from Fluke Networks is the testing platform for today - and tomorrow. This revolutionary new future-proof platform significantly reduces total time to certify by improving every aspect of the testing process. The AC Wiremap feature validates twisted-pair cabling for Power over Ethernet services in accordance with TIA/EIA standards.

FEATURES

- Unmatched speed for Cat 5e, 6, 6a, 8, Class Fa, I/II and all current standards.
- Enables testing and certification of twisted pair cabling for up to 40 Gigabit Ethernet deployments

PART #	DESCRIPTION	PRICE
DSX2-8000	A complete copper certification kit for cabling contractors testing Cat 8 and below channel and permanent links	\$15,462.00
DSX2-8000MI	2GHZ DSX Cable Analyzer V2, Multimode OLTS, w/ Wi-Fi	22,642.00
DSX2-8000-PRO	2GHZ DSX V2, Dual Display and INSPC, Quad OLTS/OTDR	70,070.00
DSX2-8000QI	2GHZ DSX Quad OLTS INSPC V2, w/ Wi-Fi	27,454.00
DSX2-8000QOI	2GHZ DSX Quad OTDR/OLTS INSPC V2, w/ Wi-Fi	41,381.00
DSX2-5000	1 GHZ DSX Cable Analyzer V2, w/Wi-Fi	13,678.00
DSX2-ADD-R	1 GHZ DSX-5000 Cable Analyzer Modules Add On Kit w/V2 Remote	12,345.00

THE LINKIQ™ CABLE+WI-FI+NETWORK TESTER

The LinkIQ™ Cable+Wi-Fi+Network Tester is the solution to verify cable performance up to 10G and solve network connectivity problems. LinkIQ validates cable performance using frequency-based measurements to calculate maximum bandwidth (10BASE-T to 10GBASE-T). LinkIQ also provides IPv4 and v6 ping; nearest switch diagnostics (IP address, name, port / VLAN number, and advertised data rates); Ethernet Alliance-certified Power over Ethernet testing (hardware/software negotiation and loaded voltage and power tests). Wi-Fi analysis to Wi-Fi 6E, including networks, channels, and access points. Additional features include cable toning, port blink, optional remote office locators, and the ability to manage results via LinkWare™ PC.

Additional features of LIQ-KIT include: Cable Toning, Port Blink, 802.1x authentication, Remote Office Locators, and the ability to manage results via LinkWare PC.

PART #	DESCRIPTION	PRICE
LIQ-DUO	LinkIQ Main Unit; soft carry case; LinkIQ reference guide; Cat6A patch cable; power supply adapter set; power supply; remote ID #1; remote ID holder; hang strap; RJ45 coupler; USB C cable; LinkIQ safety guide	\$3,896.00
LIQ-DUO-KIT	LIQ-DUO plus remote ID kit; RJ45 to M8 cable; RJ45 to M12D cable; RJ45 to M12X cable; RJ45 Male to RJ45 Female cable; multi-adapter; magnet; strap, 9; quick reference Industrial Ethernet; Intellitone probe; Intellitone probe manual; dci safety manual	\$4,456.00
LIQ-100	LinkIQ™ Cable+Network tester includes LinkIQ™ with remote ID #1, RJ45-RJ45 patch cord, AC charger, RJ45/11 universal coupler, and carrying case	\$2,843.00
LIQ-KIT	LinkIQ™ Cable+Network tester includes LinkIQ™ with remote IDs #1-7, RJ45-RJ45 patch cord, AC charger, RJ45/11 universal coupler, Intellitone Pro 200 probe and duffle bag carrying case	3,414.00

MOLEX UTP SINGLE LINE TESTER

- Verifies 1, 2, 3, and 4 pair UTP channels
- Built-in Modular Jacks for USOC, EIA 568A and 568B
- Unique 3-in-1 design
- Tests Open and Short Circuits

PART #	DESCRIPTION	PRICE
33-100	SLT3 UTP Single Line Tester	\$110.00

TEMPO COPPER TESTING KITS

The TEMPO tone and probe kit is used by technicians everywhere to identify single conductors or cables within a bundle at a cross-connect point, or at remote ends. It is designed for accurate wire identification, the 801K virtually eliminates power-related noise from their tone and probe operation.

Tone and Probe Kit Includes: 77HP High Power Tone Generator and the 200EP Inductive Amplifier in a Rugged, Woven Polyester Carrying Case.

PART #	DESCRIPTION	PRICE
701KG	Professional Tone & Probe Tracing Kit (Pictured)	\$98.45
801K	Premium Tone and Probe Kit	183.00

TEMPO NETCAT STRUCTURED WIRING TESTER AND TROUBLESHOOTER

The NETcat® Pro is a digital tool for fast, accurate checking of cables, wiring and network service. Operated using a backlit touch screen display, the Pro not only tests wiring continuity and proper pair allocation, but measures the length of cables and determines if network service is available.

FEATURES

- Verifies the Integrity of Both Twisted Pair and Coaxial Telecom Cable
- Test Wiring Continuity and Check for the Correct Allocation of Wire Pairs
- Fast, Accurate Checking of Cables, Wiring, and Network Service
- Measures the Length of Cables and Determines if Network Service is Available

PART #	DESCRIPTION	PRICE
NC-100	NETcat Micro Digital Voice and Video Wiring Tester	\$118.00
NC-500	NETcat Pro Digital VDV Wiring Troubleshooter	415.00



DSX2-8000



NEW



LIQ-DUO



LIQ-KIT



33-100



701KG

NC-500

**AUTHORIZED FULL LINE
SIGNAMAX
DISTRIBUTOR**



SKFL-3

DKFL-12

SIGNAMAX



KJ4MT-8600



KJ458MT



KJ458-C6C



CMK-SC



KRJ45/5-100



KRJ45FT-C6C

SIGNAMAX



48458MX-CSE



24458MDX-C6

SIGNAMAX KEYSTONE FACEPLATES AND SURFACE MOUNT BOXES

PART #	DESCRIPTION	PRICE
SKFL-1	1 port Single Gang Keystone Faceplate with Labeling Windows	\$1.10
SKFL-2	2 port Single Gang Keystone Faceplate with Labeling Windows	1.10
SKFL-3	3 port Single Gang Keystone Faceplate with Labeling Windows	1.10
SKFL-4	4 port Single Gang Keystone Faceplate with Labeling Windows	1.10
SKFL-6	6 port Single Gang Keystone Faceplate with Labeling Windows	1.10
SKFLA-2	2 port Angled Single Gang Keystone Faceplate with Labeling Windows	1.30
SKFLA-4	4 port Angled Single Gang Keystone Faceplate with Labeling Windows	1.30
DKFL-6	6 port Double Gang Keystone Faceplate with Labeling Windows	2.00
DKFL-12	12 port Double Gang Keystone Faceplate with Labeling Windows	2.00
DKFLA-8	8 port Angled Double Gang Keystone Faceplate with Labeling Windows	2.00
SMKL-1	1 port Surface Mount Multimedia Box	1.40
SKFD-1	Single Gang Surface Mount Faceplate Box	1.10
DKFD-2	Double Gang Surface Mount Faceplate Box	1.40
SMKL-2	2 port Surface Mount Multimedia Box	1.85
SMKL-4	4 port Surface Mount Multimedia Box	2.39

[Note: The standard color for all the above is light ivory. For other colors add the following to the p/n -BK (Black), -GY (Gray), -WH (White)] (Faceplates also available without labeling window option.) [Note: Stainless Steel Wall Plates also available]

SIGNAMAX KEYSTONE JACKS AND FIBER CONNECTOR MODULES

FEATURES:

- Keystone jacks exceed all performance requirements as defined in TIA/EIA568-B
- Terminated with 110 tooling or 4 Pair MT Series Tool
- Ability to mount either color-coded icon tabs or dust covers

PART #	DESCRIPTION	PRICE
KJMT-8600	4 Pair Termination Tool for MT Series	\$28.95
KJ458MT-C6AC*	Cat 6A 10G MT Series Keystone Jack 568A/B Light Ivory	6.00
KJ458MT-C6AC	Cat6A 10G Screened Keystone Jack 568A/B	8.05
KJ458MT-C6C	Cat6+ MT Series Keystone Jack 568A/B Light Ivory	4.25
KJ458MT-C5E*	Cat5E+ MT Series Keystone Jack 568A/B Light Ivory	2.55
KJ126MT-C3**	Cat3 Voice Grade MT Series Keystone Jack Light Ivory	2.05
CMK-BL**	Blank Keystone Module	25¢
CMK-F***	F-Type Keystone Connector Module	1.30
CMK-BNC***	BNC Keystone Connector Module	3.05
CMK-ST**	ST MM/SM Fiber Connector Module	3.15
CMK-SC**	SC MM/SM Fiber Connector Module	3.80
CMK-LC**	LC MM/SM Fiber Connector Module	6.35

*(Note: When ordering, other than Light Ivory color, add the following to the p/n: -BK (Black), -BU (Blue), -GN (Green), -GR (Gray), -OR (Orange), -RD (Red), -WH (White), -YE (Yellow))

UNSHIELDED RJ-45 MODULAR PLUGS / FIELD INSTALLABLE MODULAR PLUGS

FEATURES:

- Used for field termination of patch cords and applications

PART #	DESCRIPTION	PRICE
KRJ45/5-100	Cat5 RJ-45 for 24AWG Stranded Cable - 100 Pack	\$24.25
KRJ45/5SLD-100	Cat5 RJ-45 for 24AWG Solid Cable - 100 Pack	24.00
KRJ45/6-100	Cat6 RJ-45 for 24AWG Stranded Cable - 100 Pack	74.85
KRJ45/6SLD-100	Cat6 RJ-45 for 24AWG Solid Cable - 100 Pack	81.50
KRJ45FT-C5E	Cat 5e Unscreened Field Installable Modular Plug	3.15
KRJ45FT-C6C	Cat 6 Unscreened Field Installable Modular Plug	4.55

SIGNAMAX PATCH PANELS

PART #	DESCRIPTION	PRICE
24458-C6A	Cat 6A 10Gig 1U, 19" Rack Mountable	\$190.60
48458-C6A	Cat 6A 10Gig 2U, 19" Rack Mountable	363.85
24458MDX-C6	Cat 6 24 port 1U, 19" Rack Mountable MDX-Series	116.60
48458MDX-C6	Cat 6 48 port 2U, 19" Rack Mountable MDX-Series w/ cable management	220.00
24458MDX-C5E	Cat 5e 24 port 1U, 19" Rack Mountable MDX-Series w/ cable management	73.95
48458MX-C5E	Cat 5e 48 port 1U, 19" Rack Mountable MDX-Series w/ cable management	137.00
12458M-C5E	Cat 5e 12 port Mini Wall Mount	51.95
12458M-C6C	Cat6 12 Port Mini Wall Mount	80.00
24U-HDMMP	24 Port Unloaded Patchpanel Accepts Keystone Jacks, 19" Rack Mountable	37.95
48U-HDMMP	48 Port Unloaded Patchpanel Accepts Keystone Jacks, 19" Rack Mountable	52.95

[Note: Screened/Shielded Patch Panels for Cat 5e, 6 and 6A also available.]

PROUDLY OFFERING COPPER PRODUCTS
Call for more information!



FIS SFP MODULES

FIS provides SFP modules for 100 Mbps(SFP) , 1 Gbps(SFP), 10 Gbps(SFP+), 40 Gbps (QSFP+) and 100 Gbps(QSFP28) Ethernet switches in MSA format. Cisco, Alcatel-Lucent, Dell, Juniper and many other non-MSA formats are also available. Medias available include Singlemode and Multimode fiber as well as UTP copper. **Ask your FIS salesperson to quote any non MSA standard programed SFP.**

PART #	DESCRIPTION	PRICE
OCA1-I0	SFP 100MB Fast Ethernet 1310nm FX Multimode, 2 km range, MSA Standard Compatible	\$20.00
ODD0-I0	SFP 1 Gigabit Ethernet 850nm SX Multimode, 550 m range, DDM, MSA Standard Compatible	20.00
OC9C-I0	SFP 1 Gigabit Ethernet 1310nm LX Singlemode, 10 km range, DDM, MSA Standard Compatible	20.00
OC9C20K-I0	SFP 1 Gigabit Ethernet 1310nm LX Singlemode, 20 km range, DDM, MSA Standard Compatible	25.95
OCB1-I0	SFP 1 Gigabit Ethernet 1550nm EX Singlemode, 40 km range, DDM, MSA Standard Compatible	25.95
OCB8-I0	SFP 1 Gigabit Ethernet 1550nm ZX Singlemode, 80 km range, DDM, MSA Standard Compatible	68.00
OCB81-I0	SFP 1 Gigabit Ethernet 1550nm EZX Singlemode, 120 km range, DDM, MSA Standard Compatible	132.00

FIS WDM SFP MODULES

These SFPs transmit and receive over the same fiber using Wavelength Division Multiplexing (WDM) fiber optic technology. These SFPs utilize two different light sources (LASER) to achieve full duplex transmission over a single fiber minimizing fiber usage.

PART #	DESCRIPTION	PRICE
ODEC-I0	SFP 1 Gigabit Ethernet 1310-TX/1550-RX WDM LX Singlemode, 10 km range, DDM, MSA Standard Compatible	\$41.50
OE1B-I0	SFP 1 Gigabit Ethernet 1550-TX/1310-RX WDM LX Singlemode, 10 km range, DDM, MSA Standard Compatible	44.50
20KM0DEC-I0	SFP 1 Gigabit Ethernet 1310-TX/1550-RX WDM LX Singlemode, 20 km range, DDM, MSA Standard Compatible	60.00
20KMOE1D-I0	SFP 1 Gigabit Ethernet 1550-TX/1310-RX WDM LX Singlemode, 20 km range, DDM, MSA Standard Compatible	60.00

FIS SFP+ MODULES (10 GIG)

SFP+ (enhanced small form-factor pluggable) is an enhanced version of the standard SFP that supports data rates up to 16Gbit/s. This product is available in a singlemode and multimode version.

PART #	DESCRIPTION	PRICE
1565-I0	SFP+ 10 Gigabit Ethernet 850nm SR Multimode, 300 m range, DDM, MSA Standard Compatible	\$26.95
1469-I0	SFP+ 10 Gigabit Ethernet 1310nm LR Singlemode, 10 km range, DDM, MSA Standard Compatible	51.00
146920K-I0	SFP+ 10 Gigabit Ethernet 1310nm LR Singlemode, 20 km range, DDM, MSA Standard Compatible	55.00

FIS QSFP+ MODULES (40 GIG)

The QSFP+ supports 4 channels each up to 10Gbit/s, together all the 4 channels combine for a single 40 Gbit/s Ethernet link, 4 channels transmitting and 4 channels receiving.

PART #	DESCRIPTION	PRICE
3486-I0	QSFP+ 40 Gigabit Ethernet 850nm SR4 Multimode, 100 m range, DDM, MSA Standard Compatible	\$150.50
346B-I0	QSFP+ 40 Gigabit Ethernet 1310nm LR4 Singlemode, 10 km range, DDM, MSA Standard Compatible	535.00

FIS QSFP28 MODULES (100 GIG)

QSFP28 is a transceiver designed for 100Gbit/s data rate, it utilizes 4 transmit and 4 receive channels with 8 fibers. The "28" stands for each channel or lane carries up to 28Gbit/s rather than 10Gbit/s, so four lanes carry up to 100Gbit/s transmit and 4 lanes carry up to 100Gbit/s in receive direction. These are available in multimode or singlemode.

PART #	DESCRIPTION	PRICE
5B7E-I0	QSFP28 100 Gigabit Ethernet 850nm SR4 Multimode, 100 m range, DDM, MSA Standard Compatible	\$229.00
5B74-I0	QSFP28 100 Gigabit Ethernet 1310nm LR4 Singlemode, 10 km range, DDM, MSA Standard Compatible	1,000.00

FIS CWDM 1 & 10 GBPS SFPs

FIS Coarse Wavelength Division Multiplexing (CWDM) SFPs are available in multiple ranges (40 – 160 KM) and all 18 CWDM wavelengths (1270 – 1610 nm). Commercial and Extended temperature ranges are also available. These SFPs are MSA compliant but can be coded to be 100% OEM compatible.

PART #	DESCRIPTION	PRICE
SFP-CXX-40-GD	CWDM SFP 1 Gigabit Ethernet 1270-1610nm Singlemode, 40 km range, DDM, MSA Standard Compatible	Call For Pricing
SFP-CXX-80-GD	CWDM SFP 1 Gigabit Ethernet 1270-1610nm Singlemode, 80 km range, DDM, MSA Standard Compatible	Call For Pricing
SFP-CXX-120-GD	CWDM SFP 1 Gigabit Ethernet 1270-1610nm Singlemode, 120 km range, DDM, MSA Standard Compatible	Call For Pricing
SFP-CXX-160-GD	CWDM SFP 1 Gigabit Ethernet 1270-1610nm Singlemode, 160 km range, DDM, MSA Standard Compatible	Call For Pricing
SFP-CXX-10-10GD	CWDM SFP+ 10 Gigabit Ethernet 1270-1610nm Singlemode, 10 km range, DDM, MSA Standard Compatible	Call For Pricing
SFP-CXX-40-10GD	CWDM SFP+ 10 Gigabit Ethernet 1270-1610nm Singlemode, 40 km range, DDM, MSA Standard Compatible	Call For Pricing
SFP-CXX-80-10GD	CWDM SFP+ 10 Gigabit Ethernet 1270-1610nm Singlemode, 80 km range, DDM, MSA Standard Compatible	Call For Pricing

Replace "XX" with CWDM wavelengths ranging from 1270 (C27) - 1610 (C61): increments of 20nm spacing. Example SFP-C37-40-GD = 1370nm.

PRICE VARIES DEPENDING ON WAVELENGTH CALL AN FIS SALES REPRESENTATIVE FOR INDIVIDUAL PRICING.

INTEGRA OPTICS SMART CODER 2

The Smart Coder 2 is the perfect device to maintain, test and recode your SFPs, SFP+s and QSFP+s. This device recodes any FIS SFP to over 50 OEM platforms. The testing option of the Smart Coder2 allows the end user to conduct diagnostic monitoring on both FIS and Non-FIS brand SFPs. Testing includes transmit & receive power, temperature, and performance.

PART #	DESCRIPTION	PRICE
SMARTCODER2	SMART CODER 2 enables you to easily reconfigure FIS SFPs and test all manufacturer SFP	\$1,950.00



SFP



WDM SFP



SFP+



QSFP+



QSFP28



CWDM SFP



SMARTCODER2



UBIQUITI UISP - FIBER OPTIC SOLUTIONS FOR INTERNET SERVICE PROVIDERS

Ubiquiti UISP products are controlled by the free UISP Centralized Dashboard. UISP is primarily designed for Internet Service Providers (ISP) who want to take full advantage of the benefits Ubiquiti devices provide. UISP Dashboard provides powerful features crafted for ISPs, including link simulation, topology view, profitability calculator, and marketplace design.

XG PON OPTICAL LINE TERMINALS(OLTs) / OPTICAL NETWORK UNITS (ONUs)

UISP Fiber XGS/XG/G-PON OLT delivers 10 Gbps uplink/downlink speeds to over 2,000 subscribers. It supports XGS-PON 10 Gbps bi-directional capacity and has a 2048 client capacity (8 ports) with 4 25G SFP28 uplink ports. The device is a 1U rack mount and supports AC/DC power module redundancy. Optical Network Units provide interface at customer premise.

PART #	DESCRIPTION	PRICE
UISP-FIBER-OLT-XGS	Eight-Port OLT, Delivers 10 Gbps Uplink/Downlink Speeds	\$3,999.00
UISP-FIBER-XG	Optical Network Unit Deliver 2.5Gbps uplink/10Gbps Downlink Speeds	129.00
UISP-FIBER-XGS	Optical Network Unit Deliver 10Gbps Uplink/Downlink Speeds	179.00

G PON OPTICAL LINE TERMINALS (OLTs) / OPTICAL NETWORK UNITS (ONUs)

The UFiber OLT is an eight-port GPON optical line terminal (OLT) designed to manage fiber internet service for up to 1,024 clients (128 per port). It has a capacity of 2.488 Gbps downstream / 1.244 Gbps upstream and comes with two 10G SFP+ uplink ports. Working with the OLT, the UFiber WiFi6 GPON CPE is a point-to-multipoint Wi-Fi 6 device that creates high-speed GPON connections capable of reaching a 2.4 Gbps downstream rate and 1.2 Gbps upstream rate. Also working with the UF-OLT, is the UFiber Loco, it is the customer-premises equipment (CPE) that pairs high performance with extremely low power consumption. It has one GPON port and one GbE RJ45 LAN port and can be powered by either 24V passive PoE or Micro-USB power.

PART #	DESCRIPTION	PRICE
UF-OLT	Eight-Port GPON OLT, to Manage GPON Fiber Internet Service	\$1,875.00
UF-OLT-4	Four-port GPON OLT, to manage fiber internet service up to 512 clients (128 per port)	1,189.00
UF-WIFI6	GPON ONU With WiFi6 Support and Integrated 4-Port GbE Switch	102.50
UF-LOCO	High Power with Extreme Low Power Consumption GPON ONU, 1 ea.	49.00
UF-LOCO-5	High Power with Extreme Low Power Consumption GPON ONU, 5 pack	225.00
UF-LOCO-20	High Power with Extreme Low Power Consumption GPON ONU, 20 pack	899.00

OPTICAL TRANSCEIVER MODULES (SFP MODULES)

Ubiquiti optical transceiver modules for UISP for Optical Line Terminals.

PART #	DESCRIPTION	PRICE
UACC-UF-OM-XGS	10 Gbps optical transceiver module designed for the UISP Fiber OLT XGS	\$293.75
UF-GP-B+	UF-GP-B+ SFP Module	79.00
UF-GP-C+	UF-GP-C+ SFP Module	89.00

UISP ROUTERS AND SWITCHES

The UISP Router and the UISP Switch are designed to support wireless internet service provider (WISP) applications. They also work in conjunction with the UISP Console to manage WISP deployments. The Router is a fanless PoE unit that supports traffic shaping and automated customer suspension. These units may be staged outdoors when enclosed in the UISP Box listed below. All units are managed using the UISP application.

PART #	DESCRIPTION	PRICE
UISP-R	8 Port, Gigabit PoE Router for MicroPoP's and Secure, Large-Scale Networks	\$125.00
UISP-R-PRO	10 GbE Router W/9 GbE RJ45 and 4 10GSFP+ Ports, designed for ISP applications	598.75
UISP-S	8 port, Layer 2, Gigabit PoE switch for MicroPoP's and high-performance networks	147.50
UISP-S-PRO	220W (27V) PoE switch w/(24) GbE RJ45, (16) 27V passive PoE, and (4) 10G SFP+ ports	493.75
UISP-BOX	A compact, weatherproof enclosure for UISP Routers and Switches	62.50

60 GHZ WIRELESS INTERNET ACCESS POINTS

Ubiquiti 60 GHz Wave Access Point base stations include the Wave AP and Wave AP Micro with up to 8 km link range. The Wave AP supports up to 5.4 Gbps max throughput, with 30 degree coverage (90 Degree with 3 units) and the AP Micro supports 5 Gbps max throughput at 90 degree coverage (Single unit). For the client side, below are the Wave Nano which supports up to 5 km range and 1 Gbps duplex signal and the Wave Long Range which support up to 8 km and 1 Gbps duplex signals.

PART #	DESCRIPTION	PRICE
WAVE-AP	60 GHz PtMP Access Point Powered by Wave Technology	\$499.00
WAVE-AP-MICRO	Wide-Coverage 60 GHz PtMP Access Point Power by Wave Technology	499.00
WAVE-NANO	60 GHz PtMP Station Powered by Wave Technology	286.25
WAVE-LR	60 GHz PtMP Station Powered by Wave Technology	410.00



UISP-FIBER-OLT-XGS



UISP-FIBER-XG



UF-LOCO

UF-WIFI6



UACC-UF-OM-XGS



UF-GP-C+



UISP-R-PRO



UISP-S-PRO



WAVE-AP

WAVE-LR

UBIQUITI UNIFI - SCALABLE AND UNIFIED IT NETWORK EQUIPMENT



The Ubiquiti UniFi product line is a software-defined networking (SDN) solution that includes WiFi APs, firewalls, network switches with and without PoE, and VoIP phones and cameras. The UniFi system is modular, scalable, and flexible, making it an ideal choice for businesses or homeowners. As the system is scalable and modular, it is designed to allow for future expansion and growth. The UNIFI consoles and software make network management easy. UNIFI consoles provide continuous history reporting for data used, client stats, deep packet inspection, and speed tests. It offers advanced networking options and yet the system is designed to be intuitive, so creating networks as robust or large as you need is easy.

UNIFI CLOUD GATEWAYS/CONSOLES

Manage UNIFI network products with one of these Cloud Gateways that run the UNIFI cloud software. These gateways range from small business applications to enterprise grade performance. They support up to 10 Gbps and may have integrated PoE Switches.

PART #	DESCRIPTION	PRICE
UDM-PRO	Enterprise-grade, rack-mount W/10 Gbps Performance and Integrated Switch	\$410.00
UDM-SE	Enterprise-grade, rack-mount, 10 Gbps, and an integrated PoE Switch	\$11.25

UNIFI LAYER 2 AGGREGATION AND LAYER 3 SWITCHES

Layer 2 aggregation switches are excellent choices for enhancing network performance and reliability. The layer 3 professional switch comes with 24 or 48 ports, up to 720W PoE availability, and up to 25 Gbps uplink speed. The professional Max switch has 16, 24, or 48 ports, up to 720W PoE availability, and up to 10 Gbps downlink speed. Ubiquiti offers a range of aggregation switches that cater to various networking needs. **Please contact your FIS sales representative for SFP options.**

PART #	DESCRIPTION	PRICE
USW-FLEX	Flexible 5 port, Layer 2 PoE switch, indoor and outdoor, can be powered with PoE++	\$102.50
USW-AGGREGATION	An 8-port, Layer 2 switch made for 10G SFP+ connections	269.00
USW-PRO-24-POE	UniFi 24Port Gigabit Switch with 802.3bt PoE, Layer3 Features and SFP+	699.00
USW-PRO-48-POE	UniFi 48Port Gigabit Switch with 802.3bt PoE, Layer3 Features and SFP+	1,099.00
USW-PRO-MAX-24-POE	UniFi 24 port multi-gigabit PoE++ Layer 3 Switch, with Etherlighting	799.00
USW-PRO-MAX-48-POE	UniFi 48 port multi-gigabit PoE++ Layer 3 Switch, with Etherlighting	1,299.00

WIFI ACCESS POINTS (AP) / BUILDING BRIDGE

UniFi access points are designed to provide enterprise-class performance, effortless scalability, and an unrivaled management experience. The flagship ceiling-mounted model is designed for highest performance, while the in-wall model offers seamless installation and the versatile outdoor model can be deployed into any environment. The UniFi APs are WiFi 6 compatible and offer PoE (Power over Ethernet) operation. The wireless point to point building bridge allows the extension of a network, wirelessly to remote buildings.

PART #	DESCRIPTION	PRICE
U6-PRO	4x4 MIMO, ceiling-mounted WiFi 6 AP designed for large offices	\$163.75
U6-LR	4x4 MIMO, Ceiling-Mounted WiFi 6 AP with extended signal range	190.00
U6+	2x2 MIMO, Ceiling-Mounted WiFi 6 AP for small to medium-sized businesses	132.50
U6-MESH	Indoor/Outdoor WiFi 6 AP designed for mesh applications	190.00
UBB	A 60 GHz wireless point-to-point bridge, 500 meter range. (Sold as a 2 Pack)	499.00

CAMERAS

UNIFI offers a wide range of cameras and recording options for all conditions. Below are a few of the options. Please contact your FIS sales representative for more information or choices in Ubiquiti product line.

PART #	DESCRIPTION	PRICE
UVC-G5-PRO	Indoor/Outdoor, 4K, long-range PoE Camera W/IR night vision and 3x optical zoom	\$381.25
UVC-G4-BULLETT	Indoor/outdoor PoE camera designed to provide optimal nighttime surveillance	199.00
UVC-G4-INS	Compact, wide-angle, WiFi-connected camera with two-way audio	112.50



UDM-PRO



UDM-SE



USW-PRO-24-POE



USW-PRO-MAX-24-POE



USW-PRO-MAX-48-POE



UBB

U6-PRO

U6-MESH



UVC-4-BULLET



UVC-5-PRO



UVC-G4-INS

DON'T SEE WHAT YOU ARE LOOKING FOR!
Call and Speak With an FIS Representative.
1-800-5000-FIS(347)





FIS MEDIA CONVERTERS AND SWITCHES

FIS offers a full line of quality Ethernet network active equipment, including fixed and SFP port multiport media converters and switch gear, as well as a comprehensive line of SFPs to match your specific network requirements.



F1-DU10001320SC



F1-SFP0101G



F1-DU4001320



F1-SFP0801G



F1-SWMM1



FIS 8-Port
Switches

FIS MEDIA CONVERTERS 10/100 BASE

These Ethernet Media Converters meet IEEE Standards and are 10/100Base-TX and 100Base-FX with MDI/MDI-X auto negotiation. Full set of LED Indicators and 10/100Mbps and full/half duplex automatically configured in twisted pair port. The Multimode converters have a range of 2km and the Singlemode converters have a range of 20km.

PART #	DESCRIPTION	PRICE
F1-OEC32S1-202	10/100 Base-T/TX to 100 Base-FX Media Converter, SM/SC 2km	\$91.25
F1-DU-100-13-20-SC	10/100 Base-T/TX to 100 Base-FX Media Converter, SM/SC 20km	50.00
F1-DU-100-13-20-ST	10/100 Base-T/TX to 100 Base-FX Media Converter, SM/ST 20km	50.00
F1-DU-100-13-2-FC	10/100 Base-T/TX to 100 Base-FX Media Converter, SM/FC 20km	50.00

FIS MEDIA CONVERTERS 10/100/1000 BASE

The FIS 10/100/1000 Base media converters are designed to convert 1000BASE-SX fiber to 1000Base-T copper media or vice versa. These Ethernet Media Converters meet IEEE Standards and have MDI/MDI-X auto negotiation.

See SFP modules on page 157

PART #	DESCRIPTION	PRICE
F1-DU-1000-13-2-ST	10/100/1000 Base-T/TX to 1000 Base-FX Media Converter, MM/ST 220m (62.5) / 550m (50)	\$85.00
F1-DU-1000-13-2-SC	10/100/1000 Base-T/TX to 1000 Base-FX Media Converter, MM/SC 220m (62.5) / 550m (50)	80.00
F1-DU-1000-13-20-ST	10/100/1000 Base-T/TX to 1000 Base-FX Media Converter, SM/ST 20km	80.00
F1-DU-1000-13-20-SC	10/100/1000 Base-T/TX to 1000 Base-FX Media Converter, SM/SC 20km	80.00
F1-SFP0101G	10/100/1000 Base-T/TX to 1000 Base-FX Media Converter, SFP Port	60.00
F1-SFP01P02	Media Converter (2) x 1.25 Gigabit SFP to (1) 2.5 Gigabit SFP	140.00

FIS SWITCHES 10/100 BASE

These FIS Switches are an inexpensive way to connect remote LAN devices using an existing fiber backbone. FIS has multiple options available for both Multimode and Singlemode. See SFP modules on page 157

PART #	DESCRIPTION	PRICE
F1-DU4001320	10/100 Switch, Multimode, SC, 4UTP	\$60.00
F1-SFP0108F	10/100M Switch, SFP Slot, 8UTP	75.00
F1-SFP0116F	10/100M Switch, SFP Slot, 16UTP	95.00

FIS SWITCHES 10/100/1000 BASE

These FIS 10/100/1000 base switches are built with multiple SFP ports to support a wide range of network requirements. This powerful feature enables the switch to be extremely versatile at a low cost to the installer.

See SFP modules on page 157

PART #	DESCRIPTION	PRICE
F1-SFP0202G	10/100/1000 Media Converter, 2 SFP Slots, 2UTP	\$85.00
F1-SFP0204G	10/100/1000 Media Converter, 2 SFP Slots, 4UTP	125.00
F1-SFP0802G	10/100/1000 Media Converter, 8 SFP Slots, 1UTP	165.00

FIS PoE SWITCHES

The FIS PoE Switch provides power and data from a single point, using power over Ethernet over a single CAT5e cable. The eight RJ45 network ports plus one fiber port can be used for any 10/100 Mbps link and four of these ports can supply industry-standard IEEE 802.3af power.

PART #	DESCRIPTION	PRICE
F1-PSE1009F	8 Port 10/100 Base 802.3af PoE + 1-Port Fiber 10/100 Base Desktop Switch	\$175.00
F1-PSE1009F-35-20	8 Port 10/100 Base 802.3af PoE + 1-Port Fiber 10/100 Base, Fiber is 1310nmT/1550nmR, 20Km	185.00

FIS THREE-PORT MINI SWITCHES

FIS mini-switches provide a simple and inexpensive way to add additional computers to a network. The 3-Port Mini Switch has (2) 100Mbps fiber ports and (1) 10/100Mbps twisted pair copper port.

PART #	DESCRIPTION	PRICE
F1-SWMM1	3-Port Mini Switch with (2) 100 Base-FX MM/SC and One 10/100 Base-T/TX Port	\$125.00
F1-SWSM1	3-Port Mini Switch with (2) 100 Base-FX SM/SC and One 10/100 Base-T/TX Port	125.00

FIS EIGHT-PORT DESKTOP SWITCHES

This 8-Port Switch is an inexpensive way to connect remote LAN devices using existing fiber backbone. FIS has 8-Port Desktop Switches with one fiber port in each. The 8-port switch has (1)100 Base-FX and (7) 10/100 Base-T/TX ports. Multimode units support up to 2km and Singlemode up to 20km. External power supply included.

PART #	DESCRIPTION	PRICE
F1-JC08A-MS	8-Port Switch with 1 MM/SC Fiber Port and (7) 10/100 T/TX (RJ45)	\$105.95
F1-JC08A-MT	8-Port Switch with 1 MM/ST Fiber Port and (7) 10/100 T/TX (RJ45)	90.00
F1-JC08A-S2	8-Port Switch with 1 SM/SC Fiber Port and (7) 10/100 T/TX (RJ45)	125.00

SIGNAMAX MEDIA CONVERTERS

Signamax Connectivity Systems Switching Media Converters provide intelligent solutions for long distance connections between legacy copper networks and new fiber based installations. Extended distance Singlemode, as well as Gigabit versions are also available. Use the same converters for either wall or chassis mount. **Lifetime warranty.**

PART #	DESCRIPTION	DISTANCE	PRICE
065-1100	10/100 Base-T/TX to 100 Base-FX, MM/ST (with link fault signaling)	2km	\$113.00
065-1110	10/100 Base-T/TX to 100 Base-FX, MM/SC (with link fault signaling)	2km	113.00
065-1120	10/100 Base-T/TX to 100 Base-FX, SM/SC (with link fault signaling)	15km	260.25
065-1174	10/100 Base-T/TX to 100 Base FX MM/LC (with link fault signaling)	2km	184.00
065-1132	100 Base-FX, SM/SC to 100 Base-FX MM/SC	15km SM / 2km MM	473.25
065-1196SFPDR*	10/100/1000 Base-T/TX to 1000/100 Base-SFP Converter	SFP	256.50
065-1196A	10/100/1000 Base-T/TX to 1000 Base-SX, MM/SC Switching	220m (62.5) / 550m (50)	339.00
065-1050GSFP	10/100/1000 Base-T/TX to 1000 Base-SFP PoE+ Converter	SFP	375.00
065-1196AED	10/100/1000 Base-T/TX to 1000 Base-SX, MM/SC Switching	2km	769.00
065-1196ALX	10/100/1000 Base-T/TX to 1000 Base-LX, SM/SC Switching	10km	584.85
065-1195	1000 Base-TX to 1000 Base-SX MM/SC Gigabit Converter	220m (62.5) / 550m (50)	361.50
065-1194	1000 Base-LX SM/SC to 1000 Base-SX MM/SC Gigabit Converter	10km SM / 220m (62.5) / 550m (50)	959.50
065-1194ED	1000 Base-SX MM/SC to 1000 Base-LX SM/SC Extended Distance	20km	1,104.00
065-1197	1000 Base-T to 1000 Base-LX SM/SC (with link fault signaling)	10km	619.00
065-1185	16 Bay Rackmount Media Converter Chassis w/ Redundant Power Supplies		675.15
MC10010	SFP to SFP Media Converter 2 1000 Base SFP Ports Plus RJ45 10/100/1000		276.00
MI00010	Industrial RS-232/422/485 Serial 2 MM/SC Media Converter		315.00
MI00020	Industrial RS-232/422/485 Serial 2 SM/SC Media Converter		279.00

*(Note: Fiber Types and Distances SFP dependent and SFP Insert Modules Sold Separately)

SIGNAMAX



065-1196SFPDR*



MI00010



SC10070

SIGNAMAX GIGABIT UNMANAGED ETHERNET SWITCHES

PART #	DESCRIPTION	PRICE
SC10100	8 Port 10/100/1000 Base T/TX (RJ45) Unmanaged Compact Switch	\$49.00
SC10070	16 Port 10/100/1000 Base T/TX (RJ45) with 2 - 1000 Base SFP Ports Unmanaged Switch	184.00
SC10040	24 Port 10/100/1000 Base T/TX (RJ45) with 2 - 1000 Base SFP Ports Unmanaged Switch	223.50



SC30060

SIGNAMAX GIGABIT MANAGED ETHERNET SWITCHES

PART #	DESCRIPTION	PRICE
SC30060	8 Port 10/100/1000 Base T/TX (RJ45) with 2 - 1000 Base SFP Ports Managed Switch	\$236.75
SC30040	24 Port 10/100/1000 Base T/TX (RJ45) with 4 - 1000 Base SFP Ports Managed Switch	499.50
SC30010	48 Port 10/100/1000 Base T/TX (RJ45) with 4 - 1000 Base SFP Ports Managed Switch	920.00



SC10060

SIGNAMAX UNMANAGED POWER OVER ETHERNET (PoE+) SWITCHES

PART #	DESCRIPTION	PRICE
SC12010	4 Port 10/100/1000 T/TX PoE++ Uplink Ports 1 Gigabit SFP 10/100/1000 T/TX	\$237.00
SC10110	4 Port 10/100/1000 Base T/TX (RJ45) PoE+ 2 - 10/100/1000 Base T/TX (RJ45) Unmanaged Switch, 60 watts	119.00
SC10091	8 Port 10/100 Base T/TX (RJ45) PoE+ 2 - 10/100 Base T/TX (RJ45), Unmanaged Switch, 105 watts	166.95
SC10080	8 Port 10/100/1000 Base T/TX (RJ45) PoE+ 2 - 1000 Base SFP Ports Unmanaged Switch, 125 watts	276.00
SC10060	16 Port 10/100 Base T/TX (RJ45) PoE+ 2 - 1000 Base SFP Ports Unmanaged Switch, 235 watts	354.85
SC10050	16 Port 10/100/1000 Base T/TX (RJ45) PoE+ 2 - 1000 Base SFP Ports Unmanaged Switch, 235 watts	420.75
SC10030	24 Port 10/100 Base T/TX (RJ45) PoE+ 2 - 1000 Base SFP Ports Unmanaged Switch, 235 watts	395.00
SC10020	24 Port 10/100 Base T/TX (RJ45) PoE+ 2 - 1000 Base SFP Ports Unmanaged Switch, 385 watts	475.00
SC10010	24 Port 10/100/1000 Base T/TX (RJ45) PoE+ 2 - 1000 Base SFP Ports Unmanaged Switch	552.00

SIGNAMAX



SC30030

SIGNAMAX MANAGED POWER OVER ETHERNET (PoE+) SWITCHES

This new stackable managed power over ethernet (PoE) switch provides the capability to remotely power wireless access points, VoIP telephones, powered device media converters and other devices that meet the IEEE 802.1af PoE standard.

PART #	DESCRIPTION	PRICE
SC30050	8 Port 10/100/1000 Base T/TX (RJ45) PoE+ 2 - 1000 Base SFP Ports Managed Switch, 125 watts	\$460.25
SC30030	24 Port 10/100/1000 Base T/TX (RJ45) PoE+ 4 - 1000 Base SFP Ports Managed Switch, 200 watts	854.30
SC30020	24 Port 10/100/1000 Base T/TX (RJ45) PoE+ 4 - 1000 Base SFP Ports Full Power Managed Switch, 370 watts	1,117.25
SC50010	48 Port 10/100/1000 Base T/TX (RJ45) PoE+ 4 - 1/10 GbE SFP Ports Full Power Managed Switch, 820 watts	2,760.00



SC10121

SIGNAMAX FIBER ETHERNET ACCESS SWITCHES

Signamax's fiber Ethernet switches accommodate growing networks that require fiber connectivity. With 8 or 24 SFP ports these switches can be configured with multiple media types (UTP, Multimode and Singlemode fiber) for Gigabit and Fast Ethernet networks.

PART #	DESCRIPTION	PRICE
065-7310SFP	8 Port 100 Base SFP (RJ45) with 1-10/100/1000 Base T/TX Dual Media Port PoE+ 1 - 1000 Base SFP Ports Unmanaged Switch	\$289.00
SC10121	8 Port 1000/GbE SFP Ports with 2-10/100/1000 Base T/TX Dual Media Port Unmanaged Switch	309.00
065-7890FSFPDP	24 Port 100/1000 SFP Ports with 4-10/100/1000 Base T/TX Ports with 4 - Dual Media Ports supporting 10/100/1000 Base T/TX Ports plus 4 - 1000 Base / 10 GbE SFP+	2,235.00



SC53050

SIGNAMAX 10GIGABIT MANAGED ETHERNET SWITCHES

Signamax 10 Gbps Managed Ethernet switches are available from 8 to 48 ports with a variety of configurations. Features include SFP+ ports, Management, PoE+ (Power over Ethernet). Some models have redundant power supplies and variable speed (100 Mbps, 1 Gbps or 10 Gbps) SFP+ ports.

PART #	DESCRIPTION	PRICE
SC53080	8 Port 10/100/1000 Base T/TX (RJ45) PoE+ with 2 10GbE SFP+ Ports Managed Switch 180watts	\$859.00
SC53010	12 Port 1/10GbE SFP+ with 4 Port 10/100/1000 Base T/TX (RJ45) Managed Switch	1,965.00
SC53070	24 Port 10/100/1000 Base T/TX (RJ45) with 4 10GbE SFP+ Ports Managed Switch	1,225.00
SC53060	24 Port 10/100/1000 Base T/TX (RJ45) with 4 10GbE SFP+ Ports Managed Switch w/Redundant Power Supply	2,208.00
SC53050	24 Port 10/100/1000 Base T/TX (RJ45) PoE+ with 4 10GbE SFP+ Ports Managed Switch 370watts	1,475.00
SC53040	48 Port 10/100/1000 Base T/TX (RJ45) with 4 100MbE/1GbE/10GbE SFP+ Ports Managed Switch	1,840.00
SC53030	48 Port 10/100/1000 Base T/TX (RJ45) PoE+ with 4 100MbE/1GbE/10GbE SFP+ Ports Managed Switch 860watts	2,699.00



MI10060

SIGNAMAX DIN-RAIL INDUSTRIAL HARDENED MEDIA CONVERTERS

Signamax Din-Rail Industrial Hardened Media Converters have been developed to operate in harsh industrial environments that require ruggedized equipment that can operate in severe temperature extremes. These media converters are an affordable solution for outdoor environments, transportation roadside systems, shop floors, and other harsh environments where consistent operation at temperature extremes of -40°F to 167°F (-40°C to 75°C) are necessary.

(Meets NEMA TS1 Environmental Requirements for Traffic Control Equipment)

PART #	DESCRIPTION	PRICE
MI10051	2 Port 10/100 T/TX (RJ45) to 100 Base FX MM/SC Industrial Media Converter	210.25
MI10020	2 Port 10/100/1000 T/TX (RJ45) to 2 - 1000 Base SFP Ports Industrial Media Converter	279.00
MI10010	2 Port 10/100/1000 T/TX (RJ45) PoE+ to 2 - 1000 Base SFP Ports Industrial Media Converter	310.00
MI20010	10/100/1000/2.5G/5G/10G to 10GbE SFP+ PoE++ 95watts	736.00
065-1800Z	10/100 Base T/TX to 100 Base FX Industrial Media Converter PoE+ ST/MM 2km Span	821.50
065-1810Z	10/100 Base T/TX to 100 Base FX Industrial Media Converter PoE+ SC/MM 3km Span	821.50
065-1820Z	10/100 Base T/TX to 100 Base FX Industrial Media Converter PoE+ SC/SM 20km Span	895.00

[Note: 48 Volt, 75, 120, 240 Watt and 24 Volt, 30,60,75,120 Watt Din Rail Mt. Power supplies available.]



SI10021

SIGNAMAX UNMANAGED HARDENED INDUSTRIAL SWITCHES

Signamax's Hardened Industrial DIN-Rail Mount Switches have been developed to operate in harsh industrial environments that require ruggedized equipment that can operate in severe temperature extremes. These switches are an affordable solution for outdoor environments, transportation roadside systems, shop floors, and other harsh environments where consistent operation at temperature extremes of -40°F to 167°F (-40°C to 75°C) is necessary. (Meets NEMA TS1 and TS2 Environmental Requirements for Traffic Control Equipment)

PART #	DESCRIPTION	PRICE
SI10050	4 Port 10/100 Base T/TX (RJ45) PoE+ and 4 Port 10/100 Base T/TX (RJ45) Industrial Switch, 120 watts	\$151.25
SI10041	4 Port 10/100/1000 Base T/TX (RJ45) and 2 - 1000 Base SFP Ports Industrial Switch	249.75
SI10031	4 Port 10/100/1000 Base T/TX (RJ45) PoE+ and 2 - 1000 Base SFP Ports Industrial Switch, 120 watts	349.00
SI10021	8 Port 10/100/1000 Base T/TX (RJ45) and 2 - 1000 Base SFP Ports Industrial Switch	420.00
SI10011	8 Port 10/100/1000 Base T/TX (RJ45) PoE+ and 2 - 1000 Base SFP Ports Industrial Switch, 240 watts	552.00
065-7407GPOEP	4 Port 10/100/1000 Base T/TX (RJ45) PoE+ with 2 - 100/1000X SFP Ports	735.00
065-7410GPOEP	8 Port 10/100/1000 Base T/TX (RJ45) PoE+ with 2 - 100/1000X SFP Ports	885.00

[Note: 48 Volt, 75,120,240 Watt and 24 Volt, 30,60,75,120 Watt Din Rail Mt Power Supplies Available. Other 4, 6, 8 Managed 10/100 and 10/100/1000 Industrial Din Rail Mt. Switches available with and without PoE ports available.]

SFP+ ACTIVE OPTICAL CABLE

SFP+ Active Optical Cables support data rates up to 10.3Gbps and lengths from 1m to 100m. Featuring an extended temperature range, direct attach interface, and compliance with SFP+ MSA. *Ask your FIS salesperson to quote any non MSA standard programed SFP.*

SFP+ ACTIVE OPTICAL CABLE 10GBPS

PART #	DESCRIPTION	PRICE
SFP-10G-AOC1M-IO	SFP+, Active OM-3 Optical Cable to SFP+, 850nm SR MMF, 10G DDM 1m, MSA Compatible	\$72.00
SFP-10G-AOC5M-IO	SFP+, Active OM-3 Optical Cable to SFP+, 850nm SR MMF, 10G DDM 5m, MSA Compatible	80.00
SFP-10G-AOC10M-IO	SFP+, Active OM-3 Optical Cable to SFP+, 850nm SR MMF, 10G DDM 10m, MSA Compatible	88.00
SFP-10G-AOC25M-IO	SFP+, Active OM-3 Optical Cable to SFP+, 850nm SR MMF, 10G DDM 25m, MSA Compatible	126.00

QSFP+ ACTIVE OPTICAL CABLE

QSFP+ and QSFP28 Active Optical Cables support a 40Gbps or 100Gbps operating data rate, with lengths ranging from 1m to 100m and have compatibility with commercial temperature ranges. They are QSFP+ and QSFP28 MSA compliant. *Ask your FIS salesperson to quote any non MSA standard programed SFP.*

QSFP+ ACTIVE OPTICAL CABLE 40GBPS

PART #	DESCRIPTION	PRICE
QSFP-40G-AOC1M-IO	QSFP+, Active OM-3 Optical Cable to QSFP+, 850nm SR4 40G, 1m, MSA Compatible	\$196.00
QSFP-40G-AOC5M-IO	QSFP+, Active OM-3 Optical Cable to QSFP+, 850nm SR4 40G, 5m, MSA Compatible	206.00
QSFP-40G-AOC10M-IO	QSFP+, Active OM-3 Optical Cable to QSFP+, 850nm SR4 40G, 10m, MSA Compatible	224.00
QSFP-40G-AOC25M-IO	QSFP+, Active OM-3 Optical Cable to QSFP+, 850nm SR4 40G, 25m, MSA Compatible	286.00

QSFP28 ACTIVE OPTICAL CABLE 100GBPS

PART #	DESCRIPTION	PRICE
QSFP28-100G-AOC1M-IO	QSFP28, Active OM-3 Optical Cable to QSFP28, SR4 100G, 1m, MSA Compatible	\$344.00
QSFP28-100G-AOC5M-IO	QSFP28, Active OM-3 Optical Cable to QSFP28, SR4 100G, 5m, MSA Compatible	356.00
QSFP28-100G-AOC10M-IO	QSFP28, Active OM-3 Optical Cable to QSFP28, SR4 100G, 10m, MSA Compatible	364.00
QSFP28-100G-AOC25M-IO	QSFP28, Active OM-3 Optical Cable to QSFP28, SR4 100G, 25m, MSA Compatible	430.00

SFP+ ACTIVE AND PASSIVE DIRECT ATTACH CABLES

SFP+ Active and Passive Direct Attach Cables with operating data rates up to 10.5Gbps and lengths from 0.5m to 10m. They operate in commercial temperature ranges, are SFP+ MSA compliant, and are suitable for Multi-Rate Fiber Channel, Data Center and Enterprise Networks. *Ask your FIS salesperson to quote any non MSA standard programed SFP.*

SFP+ ACTIVE DIRECT ATTACH CABLE 10GBPS

PART #	DESCRIPTION	PRICE
SFP-10G-ADAC7M-IO	SFP+, Direct Attach Twinax Cable, Active, 7m, MSA Compatible	\$99.00
SFP-10G-ADAC10M-IO	SFP+, Direct Attach Twinax Cable, Active, 10m, MSA Compatible	108.00

SFP+ PASSIVE DIRECT ATTACH CABLE 10GBPS

PART #	DESCRIPTION	PRICE
SFP-10G-PDAC1M-IO	SFP+, Direct Attach Twinax Cable, Passive, 1m, MSA Compatible	\$21.00
SFP-10G-PDAC3M-IO	SFP+, Direct Attach Twinax Cable, Passive, 3m, MSA Compatible	28.00
SFP-10G-PDAC5M-IO	SFP+, Direct Attach Twinax Cable, Passive, 5m, MSA Compatible	46.00

QSFP+ PASSIVE DIRECT ATTACH CABLES

QSFP+ Passive Direct Attach Cables with a 40Gbps operating data rate and lengths ranging from 0.5m to 7m. These cables feature a Direct Attach Copper Cable Interface and are designed for commercial temperature ranges. They are QSFP+ MSA compliant. *Ask your FIS salesperson to quote any non MSA standard programed SFP.*

QSFP+ PASSIVE DIRECT ATTACH CABLE 40GBPS

PART #	DESCRIPTION	PRICE
QSFP-40G-PDAC1M-IO	QSFP+, Passive Copper Cable to QSFP+, CR4 40G, 1m, MSA Compatible	\$68.00
QSFP-40G-PDAC3M-IO	QSFP+, Passive Copper Cable to QSFP+, CR4 40G, 3m, MSA Compatible	76.00
QSFP-40G-PDAC5M-IO	QSFP+, Passive Copper Cable to QSFP+, CR4 40G, 5m, MSA Compatible	148.00

QSFP+ PASSIVE DIRECT ATTACH CABLE BREAKOUT 40GBPS

PART #	DESCRIPTION	PRICE
QSFP-4X10G-PDAC1M-IO	QSFP+, Passive Copper Cable 30AWG to 4xSFP+, CR4 40G, 1m, MSA Compatible	\$105.00
QSFP-4X10G-PDAC3M-IO	QSFP+, Passive Copper Cable 30AWG to 4xSFP+, CR4 40G, 3m, MSA Compatible	116.00
QSFP-4X10G-PDAC5M-IO	QSFP+, Passive Copper Cable to 4xSFP+, CR4 40G, 5m, MSA Compatible	175.00



SFP-10G-AOC5M-IO



QSFP-40G-PDAC1M-IO



QSFP-4X10G-PDAC1M-IO



Visit Us Online

fis UNIVERSITY

PREMIER FIBER OPTIC EDUCATION

About FIS University

Founded in 1985 by Fiber Instrument Sales, the nation's leading supplier and manufacturer of fiber optic components, FIS University's instructors have trained more than 25,000+ professionals world-wide in both basic and advanced techniques related to connectorization, testing and fiber optic splicing.

Principles for FTTX (Fiber-To-The-X) - Two Days NEW

This is an introductory two day course to Fiber To The "X" intended for the technician who has completed our two-day Fiber Optic I & II Course or has fiber optic field experience. Basic theory will include simple architectures, components used and field testing requirements. Hands on will include a short session on OTDR's and Fusion Splicer essentials. Detailed hands on operation of PON Meters and Channel Analyzers is included. The objective is to provide a comprehensive understanding of FTTX so that the technician may pursue the job with confidence.

FTTx (Fiber-to-the-x) Installation Training - Two Days NEW

The FTTX Installation course is designed for the Installation technician with the responsibility of connecting the network to the end customer. This course is a two-day course which includes introductory level network component and equipment information as well as all optical splicing and performance testing requirements. Students will perform all splicing/termination tasks associated with the installation of the customer's drop cable and inside fiber connection to the optical active equipment. When or if available active equipment will be used for all classroom exercises.

FTTx (Fiber-to-the-x) Design Training - Two Days NEW

The FTTX Design course is developed for the OSP network designer/manager who has the responsibility of evaluating and creating an Outside Plant network supporting PON architecture. The course includes an introduction to the variation of PON network architectures and guidance regarding selection of an architectural solution and the creation of the associated BOM. The class is a two-day course which includes classroom design exercises covering three of the most typical architectures and understanding the installation splicing and testing requirements.



Live Online Training

On completion of class student earns 16 BICSI CEC's!

Live online learning. This course will cover the same material that is taught in our physical course and showcases the same equipment used throughout the training by the instructor. You will see your instructor via a video feed. It's just as though you were having a one on one conversation. This real time interaction is as if you were talking face to face. Discussions are always welcome and encouraged. FREE Johnny's Tool Box & fiber manual, a \$275.00 value. This tool box and manual is all you need to follow along for the entire training and it is included in the training price.

Johnny's Tool Box contains all the essential tools you will need to complete your training.

Fiber Optics I and II - Two Days

On completion of class student earns 16 BICSI CEC's!

Fiber Instrument Sales offers training through FIS University, a leader in fiber training since its inception in 1996. This specialized training provides the technician with a solid foundation to build their careers in fiber optics. Our hands on training covers such topics as connectorization techniques, test equipment operation, fusion splicing, OTDR operation, network cabling installation and restoration, LAN applications and more. These courses are recognized by leading industry organizations including BICSI and ETA.

View full curriculum and register online at www.fiberinstrumentsales.com

Custom and Corporate

We can provide you with fiber optic training uniquely geared for your organization. FIS University has developed and delivered thousands of customized courses, videos, and other training materials for organizations around the world, each geared specifically to the skill level and subject matter unique to your organization. Select a time & location convenient for you. **Learn more at www.fiberinstrumentsales.com**

Coming in 2025!

Training Sessions Are Held Across The Nation!

2025 Training Schedule

Fiber Optics I & II and Live Online Training

March 18-19 Atlantic City
March 25-26 **Live Online**

April 14-15 Detroit, MI
April 15-16 **Live Online**
April 16-17 Chicago, IL
April 30- May 1 Baltimore, MD

May 5-6 Jackson, MS
May 6-7 **Live Online**
May 7-8 New Orleans, LA
May 20-21 Anchorage, AK
May 20-21 Philadelphia, PA
May 28-29 **Live Online**

June 10-12 Brightside
June 17-18 Minneapolis, MN
June 24-25 **Live Online**
June 24-25 Burlington, VT

July 8-9 **Live Online**
July 15-17 Brightside
July 22-23 **Live Online**
July 29-30 Providence, RI
July 29-31 Brightside

August 11-12 Bosie, ID
August 12-14 Brightside
August 13-14 Salt Lake City, UT
August 19-20 **Live Online**
August 26-28 Brightside

September 9-11 Brightside
September 16-17 New Orleans, LA
September 16-17 **Live Online**
September 23-25 Brightside

October 6-7 Portland, OR
October 8-9 Seattle, WA

October 14-16 Brightside
October 21-22 **Live Online**
October 28-29 Cleveland, OH

November 3-4 Charlotte, NC
November 5-6 Atlanta, GA
November 11-12 **Live Online**

December 8-9 Boston, MA
December 10-11 New York City, NY
December 16-17 **Live Online**
December 18-19 Washington, DC



*Schedule
Online*

*These are tentative dates for the 2025 year and are subject to change. Visit us on the web at www.fiberinstrumentsales.com for an up to date schedule.



To learn more about FISU's Training Programs, visit www.fisuniversity.com, call 1-800-5000-FIS (347), or email training@fissales.com

Further questions?

Contact Training Coordinator
Christie Rutigliano at 315-737-2169
or email crutigliano@fiberinstrumentsales.com

BICSI recognizes FIS University's
Live Online Training & Fiber Optic I and II
courses for BICSI Continuing Education
Credits (CECs)



CLASSES IN THE ADIRONDACKS A UNIQUE TRAINING EXPERIENCE

Ask about training at beautiful Brightside-On-Raquette, our lakeside training center in the Adirondack Mountains of New York State. The Brightside provides a unique and relaxing environment in which to learn about fiber optic theory and techniques. This class follows the same curriculum as the standard FIS 2-day fiber classes.

The registration fee includes training, all meals and two-night's lodging in your own private room at The Brightside. Enjoy hiking, fishing, swimming, kayaking and more at this beautiful location on Raquette Lake.


Brightside Training Class: \$695.00 / Person

FIBER OPTIC TRAINING CLASSES

PART #	DESCRIPTION	PRICE
F267	Live Online Fiber Optic Training (2 days)	\$349.00
F265	Fiber Optic Hands-On I & II (2-day)	450.00
F265	Fiber Optic Hands-On I & II (2-day, Brightside)	695.00
F230	Fiber Optic Hands-On Day I (only)	225.00
F260	Fiber Optic Hands-On Day II (only)	275.00
TRAINING	Online Fiber Optic Video Training	195.00

FIBER OPTIC TEXTBOOK

PART #	DESCRIPTION	PRICE
F1MANUAL2	FIS Training Manual 2nd Edition	\$39.99
F1-9791	FIS Lab Manual 4th Edition	19.95

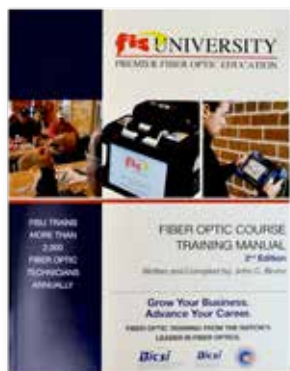

F1MANUAL2

For more information about the tools used in class, recommended books and dvd's for a better understanding of fiber optics go to the website: www.fiberinstrumentsales.com

SERVICES

SERVICES | EQUIPMENT RENTALS

Call 1.800.5000.FIS (347)
Ask For Our Rental Department!



OTDR RENTAL RATES

Launch cable included



FIS ATLAS OTDR



FTB720



AFL FLEXSCAN



VIAVI T-BERD 4000v2

	1 Week	2 Weeks	1 Month
FIS ATLAS OTDR SM/MM	\$288.00	\$460.00	\$575.00
EXFO MAX-720/730	\$400.00	\$640.00	\$800.00
AFL FLEXSCAN SM	\$350.00	\$560.00	\$700.00
VIAVI T-BERD 4000v2 1310/1550nm SM	\$400.00	\$640.00	\$800.00

FUSION SPLICER RENTAL RATES

Includes cleaver, 1 spare set of electrodes, battery and charge cord



FIS CA6+



FIS AC7



AFL 90S



SUMITOMO Q102CA



AFL 90R

	1 Week	2 Weeks	4 Weeks
CORE ALIGNMENT			
FIS CA6+ Cheetah SOC Compatible	\$375.00	\$600.00	\$750.00
CORE ALIGNMENT			
AFL 90S, or SUMITOMO Q102CA Cheetah SOC Compatible	\$500.00	\$800.00	\$1,000.00
ACTIVE V-GROOVE (Clad Alignment)			
FIS AC7 Cheetah SOC Compatible	\$200.00	\$325.00	\$400.00
MASS FUSION SPLICER (12 FIBER)			
AFL 90R or SUMITOMO Q101M12	\$915.00	\$1,460.00	\$1,825.00

TEST EQUIPMENT RENTAL RATES



FIS Multi-Fiber Test Set



AFL SMLP5-5



EXFO FOT-945 Max Tester



Fluke DSX-8000



Viavi Quad OLTS

	1 Week	2 Weeks	4 Weeks
FIS Multi-Fiber Test Set			
FIS Multi-Fiber 850 or 1310 Source Test Set	\$498.00	\$796.00	\$995.00
AFL / SMLP5-5			
PM and LS (Singlemode or Multimode, Downloadable Power Meter)	\$200.00	\$250.00	\$300.00
EXFO MAX-945			
MaxTester (pair) (Quad)	\$575.00	\$920.00	\$1,150.00
FLUKE NETWORKS			
VERSIV DSX-8000 (Copper Cable Analyzer)	\$925.00	\$1,480.00	\$1,850.00
VIAVI Loss Test Set			
Viavi Quad OLTS	\$575.00	\$920.00	\$1,150.00

FIBER OPTIC EQUIPMENT CALIBRATIONS / VERIFICATIONS



Stay compliant with industry standards by taking advantage of our full service calibration lab. All equipment is inspected, calibrated to NIST traceable standards, and verified to be in conformance with the manufacturer's specifications. Turn around time is typically 10 business days or less for standard services. All calibration services include a NIST traceable calibration / verification certificate. Units are available to rent for extended service or repairs.

E-mail us with any questions calibration@fissales.com.

Visit us on our website at www.fiberinstrumentsales.com/calibration/



All Verifications come with the following Service Features

- All calibration and/or verification services include a NIST traceable calibration or verification certificate
- Verification of conformance with the manufacturer's specifications
- Ensure correct operation and performance

OTDR VERIFICATION

	PRICE
FIS Handheld OTDR	\$300.00
EXFO Handheld OTDR	550.00
AFL Handheld OTDR	550.00
Anritsu Handheld OTDR	550.00
Platform OTDR and 1 Module	850.00
Additional Modules (Price Each)	350.00
Other Manufacturers - Call for pricing	

TEST SET KIT VERIFICATION

	PRICE
FIS	\$140.00
EXFO	350.00
AFL	350.00
Anritsu	350.00
Other Manufacturers - Call for pricing	

*Return Shipping Not Included in Pricing

POWER METER AND LIGHT SOURCE VERIFICATION

	PRICE
FIS	\$75.00
EXFO	150.00
AFL	150.00
Anritsu	150.00
Other Manufacturers - Call for pricing	

CLEAVER MAINTENANCE

	PRICE
Cleaver Maintenance and Evaluation, Blade Adjustment, Adjust Blade Height, Verify Proper Performance, and Replace Diamond Cleaver Blade*	\$300.00
*Cost to service a cleaver with an autorotating cleaver blade is \$350.00	
*Subject to Program Availability	

FUSION SPLICER MAINTENANCE

	PRICE
Splicer Maintenance and Evaluation, Replace Electrodes, Clean Optical Components, Detailed Cleaning, and Diagnostic and Performance Tests	\$400.00

Save Money! FIS NEW-2-YOU PROGRAM / FIS UPGRADE PROGRAM

Fiber Instrument Sales can save you money by providing a selection of pre-owned test and splicer equipment. We have demo models, overstock items, rental inventory, and an occasional trade-in all available at 20% to 60% off the original price.

Fiber Instrument Sales is also looking to purchase well kept, up to date used splicers and OTDRs. If you have a unit you are interested in selling and that unit is in working order (no repairs needed) please contact us for possible quote.

Contact your FIS sales representative for more information on New-2-You / FIS Upgrade Program. You may also contact FIS Services at 800-500-0347 extension 2168 and 2114; or at: rentals@fissales.com.



Visit Us Online

WHY FINANCE

Roughly **79%** of U.S. businesses - both small and fortune 500 - **finance their equipment.***

Retain Working Capital

Financing equipment allows for affordable monthly payments so that you can use working capital for day-to-day operational expenses.

Seasonal Payment Schedule

Protect your positive cash flow during seasonal fluctuations by financing with no money down and flexible 24-72 month finance terms.

Potential Tax Benefits

IRS Section 179 allows for equipment purchase write-offs. Consult with a tax advisor to take advantage of the benefit.

Cover All Related Expenses

Finance 100% of your purchase including installation, services, and software with one easy monthly payment.

*Statistic provided by the Equipment Leasing and Financing Association.



Ask your FIS Sales Representative for details or email:

1-800-5000-FIS(347)
qualitycontrol@fissales.com

INDEX

Active Equipment	157-162	Connectors & Adapters Bulk	132, 134, 135, 149	Heat Ovens, Connector	139	Scribe Tools	120
Active Fiber Optic SFP Assemblies	163	Connectors & Mating Sleeves	129-135, 144-148	Heater Protection Sleeve	139	Sensors, Fiber Optic	151
Adapters, Fiber Optic	144-148	Connectors, Bobtail Quick Term	129	Hermaphroditic 4 Channel Connectors	17	Service Cables	14
Adapter Kit, Fiber Optic	145	Connectors, FC	134, 135	Hot Melt Connectors	131	SFP-Small Form Pluggable	157
Adapter Plates	70, 72, 73	Connectors, Fiber Optic	129-135	Hybrid Adapters	144, 145	Shrink Tubes, Colored	122
Adapters, Buffered Fiber	137	Connectors, Fusion Splice-On	50, 51, 55, 59	Identifier, Fiber	36, 37	Signs, Warning	125, 126
Adapters, FC Hybrid	144, 145	Connectors, Hot Melt	131	Innerduct and Accessories	128	Simplex Cable	96, 97
Adapters, Hybrid	144, 145	Connectors, LC	135	Inspection Microscopes	21, 27, 30, 31, 44, 45	Singlemode Patch Cables	6, 7
Adapters, LC Hybrid	144, 145	Connectors, MTP	133	Inspection Probes	21, 27, 30, 31, 44, 45	SMPT Cable Assemblies	16
Adapters, ST Hybrid	144, 145	Connectors, Quick Termination	129-131	Interconnects, Rack	64, 65, 67, 68, 72, 73	SMPT Test Set	19
Adhesive, Anaerobic	138	Connectors, SC	132	Kim Wipes	105	Sno Shoes, Fiber Optic	93
Adhesive, Bobtail	129	Connectors, ST	134	Kits, Installation	112-114	Specialty Fiber	95
Aerial Cable, Self-Supporting	101	Connectors, Terminator	14	Kits/Connector Restoration	130, 131	Spectrum Analyzer, Optical	20, 22, 28
Air, Canned	104	Consumables	104-111	Labels	125, 126	Splice Bridges	76
Alcohol Isopropyl	105	Continuity Tester	47	Laser Safety Caps	137	Splice Closures, Outdoor	82-85, 88-92
Anaerobic Adhesive	138	Copper	154-156	Launch Boxes	35	Splice on Connectors	50, 51, 55, 59
Aqua Patch Cables, 10 Gig	8	Copper Cable	154	LC Connectors	135	Splice Holding Chips	76
Armored Cable	100	Copper Cable Assemblies	154	LC Hybrid Adapters	144, 145	Splice Tents	127
Assemblies	6-16	Copper SFP Assemblies	163	LC Mating Sleeves	147	Splice Sleeves	63, 88
Attenuators, Bulkhead	149	Copper Splicing Assemblies	156	Locators, Underground	127	Splice Trays	73, 76, 88, 89, 90, 91
Attenuators, Fiber Optic	149, 150	Copper Cabling Patch Panels	156	Loopback Modules	14	Splicers, Fusion	50-53, 56-59
Backbone Trunk Cable Assemblies	12, 13	Copper Connectors, Jacks & Inserts	156	Loose Tube Cable	101	Splices, Lab	62
Bare Fiber	94, 95	Copper Faceplates & Outlets	156	Magnifying and Safety Glasses	121, 122	Splices Mechanical	62
Bare Fiber Pigtail Kit	48	Copper Test Equipment	34, 155	Mandrels	48	Splitters, Planar Lightwave	86
Bend Optimized Cable	96-101	Couplers / Splitters	15, 80, 86, 87	Marker Tapes, Buried Cable	125, 126	ST Connectors	134
Bobtail Adhesive	129	Coupler Modules	15, 80, 86, 87	Matching Gel	104	ST Hybrid Adapters	144, 145
Bobtail Installation Kit	129	Coupler Modules, Custom	15, 80, 86, 87	Mating Sleeves, FC	148	ST Mating Sleeves	148
Bobtail Quick Term Connectors	129	Crimp Tools, Fiber Optic	120	Mating Sleeves, LC	147	Stripping Tools, Cable	61, 116, 118
Boots, Connector	136	Custom Broadcast Cable Assemblies	16	Mating Sleeves, SC	146	Swabs, Fiber Optic	110
Break-Out Kits	103	Custom Cable Assemblies	10-13, 16	Mating Sleeves, ST	148	Switch Modules, Ethernet	160-162
Broadcast Cable Reels	19	Custom Coupler Modules	15, 80, 86, 87	Mechanical Splice Protection Sleeves	62	Switches, Ethernet	160-162
Buffered Fiber Adapters	137	Custom Drilling Service	152-153	Mechanical Splices	62	Switches, Ethernet Desktop	160, 161
Bulk Connectors & Adapters	132, 134, 135, 149	Custom Fiber Optic Enclosures	67-68	Media Converters	160-162	Switches, Mini, Ethernet	160
Bulkhead / Adapter Cleaners	109	Custom Mode Conditioning Patch Cables	14	Micro-Distribution Cable	99, 100	Switches, Network (Layer 2 and Layer 3)	159
Bulkhead Cable Marker Tapes	126	Custom MTP Backbones	12, 13	Microscopes, Inspection	21, 27, 30, 31, 44, 45	Syringe, Epoxy	139
Cable	95-101	Custom Patch Cables	10-11	Microscopes, Video	21, 27, 30, 31, 44, 45	Table, Portable	127
Cable Aerial, Self-Supporting	101	Custom Rack Mounts	67	Mini OTDR's	20, 27, 31, 32, 33	Tactical/Broadcast Fiber Optic Cable	18, 100
Cable, Armored	100	Data Center Cabling	99	Mode Conditioning Patch Cables	14	Tactical/Broadcast Products	16-19
Cable Assemblies	6-19	Disposal Unit, Fiber Optic	104	MTP Backbone Assemblies, Custom	12-13	Talk Sets, Fiber Optic	39
Cable Assemblies, Broadcast, Custom	16	Distribution Cable	98-100	MTP Cassettes	12-13, 68	Terminator Connectors	14
Cable Assemblies, Copper	154	Drilling Service, Custom	152-153	MTP Connectors	133	Test Boxes	35
Cable Assemblies, Custom	10-14	Drop Cables	83, 101	MT-RJ Mating Sleeves	148	Test Equipment, Fiber Optic	20-48
Cable Assemblies, SMPT	16	Duplex Cable	96, 97	MU Mating Sleeves	148	Test Equipment, Copper	34, 155
Cable Assemblies, TFOCA II	17	E2000 Patch Cables / Mating Sleeves	14	Multimode Patch Cables	8-9	Test Equipment Rentals	166
Cable, Bend Optimized	96-101	Elastomeric Lab Splice	62	Network Infrastructure Equipment, UBIQUITI	158-159	Test Equipment, Ruggedized	20, 38, 40
Cable Caster	123	Enclosures, Outdoor	82-85, 88-92	Network Switches (Layer 2 and Layer 3)	159	Test Set, Optical Loss	23, 27, 29, 38, 39, 40
Cable Clamps	124	Enclosures, Rack & Wall Mount	64-69, 72-75	NID's, Fiber Optic	82, 84, 89	Test Set Rentals	166
Cable, Copper	154	Epoxy	138	Node Cables, Compact	14	Test Set, SMPT	19
Cable, Custom Fiber Optic	94	Epoxy Application Syringe	139	Optical Couplant	104	TFOCA II Cable Assemblies	17
Cable Cutting / Slitting Tools	117-119	Epoxy Connectors	132-135	Optical Loss Test Equipment	23, 27, 29, 38, 39, 40, 41, 42, 43	Tie Wraps	124
Cable Dispenser	123	Ethernet Active Devices	160-162	Optical Spectrum Analyzer	20, 22, 28	Tight Buffer Cable	95
Cable, Distribution	98, 100	Ethernet Desktop Switches	160, 161	Optical Transceiver Modules	158	Tools	112-128
Cable, Drop	83, 101	Ethernet Fiber Modules	160, 161, 162	OTDR Test Boxes	35	Tool Kits, Fiber Optic	112-114
Cable, Duplex	96, 97	Ethernet Mini Switches	160	OTDR Rentals	166	Tools, Cable Preparation	116-119, 121
Cable, Fiber Optic	95-101	Ethernet Switches	160-162	OTDR's	20, 21, 24, 25, 26, 28, 29, 31, 32, 33, 34	Tools, Copper Cabling	156
Cable, Fiber, Tactical/Broadcast	17, 100	Eye Loupe Set	121	Outside Plant	80-93	Tracetape	128
Cable, Gigabit	96-101	Fan-Out Kits	103	Oven Protection Sleeves	139	Training & Education	164, 165
Cable Jetter Kit	123	Fault Locator	46-47	Patch Panels, Copper Cabling	156	Trunk Cable Assemblies, Backbone	12, 13
Cable, Large Core Fiber Optic	94, 95	FC Connectors	134, 135	Patch Panels, Fiber Optic	64-69, 72, 73	UBIQUITI Network Infrastructure Equipment	158-159
Cable, Loose Tube	101	FC Hybrid Adapters	144, 145	Patch Cables, 10 Gig OM3 & OM4 Aqua	8	UISP Routers	158
Cable Management	69, 77, 79	FC Mating Sleeves	144, 145, 148	Patch Cables, Custom	10-12	UISP Switches	158
Cable Management Racks	69	Ferrule Protection Caps	136	Patch Cables, Fiber Optic	6-14	Vaults / Handholes	92
Cable, Micro-Distribution	99, 100	Ferrules, Connector	152, 153	Patch Cables, Mode Conditioning	14	Velcro Roll	124
Cable Preparation Tools	116-119, 121	Fiber, Bare	95	Patch Cables, Multimode	8, 9	Video Microscopes	21, 27, 30, 31, 44, 45
Cable Pull Tape / String	128	Fiber Fence Security	151	Patch Cables, Polarization Maintaining	14	Visual Fault Locator	46, 47
Cable Pulling Lubricant	128	Fiber Identifier	36, 37	Patch Cables, Singlemode	6, 7	Wave Division Multiplexers	15, 87
Cable Reels, Broadcast	19	Fiber Inspection Probes	21, 27, 30, 31, 44, 45	Piano Wire	104	WDM's	15, 87
Cable, Ribbon	96	Fiber Modules, Ethernet	160, 161, 162	Pigtail, Gold Tipped	48	Wi-Fi Access Points	159
Cable, Simplex	95, 96, 97	Fiber Optic Adapter Kit	145	Pigtail Kit, Bare Fiber	48	Wireless Internet Access Points	158
Cable Spools	94, 123	Fiber Optic Attenuators	149, 150	Pigtail Snap Packs	71	Work Tables/Platforms	127
Cable Stripping Tools	61, 116, 118	Fiber Optic Cable	95-101	Pigtails for Splicing	71	XG PON OLTs/ONUs	158
Cable Ties	124	Fiber Optic Cleaning Solutions	105-107	Pigtails, Distribution Style	71		
Cable, Tight Buffer	95	Fiber Optic Cleaning Wipes	104-107	Planar Lightwave Splitters	86		
Calibration Services	167	Fiber Optic Connectors	129-135	Plates, Adapter	70, 72, 73		
Cameras	159	Fiber Optic Disposal Unit	104	Pocket Fault Locator	46, 47		
Canned Air	104	Fiber Optic Patch Cables	6-14	Polarization Maintaining Patch Cables	14		
Cap & Chain, Metal	137	Fiber Optic Sensors	151	Polish Films	140-141	Fiber Optic Lab Manual	165
Cat 5e, 6, 6A Products	154-156	Fiber Optic Swabs	110	Polish Machines	142	Fiber Optic Training Posters	165
Cleaning Kits	111, 115	Fiber Optic Talk Sets	39	Polish Plates, Pads & Mats	143	Textbooks	165
Cleaning Pen, Fiber Optic	105	Fiber Optic Tool Kits	112-114	Polishing Discs	143	Training Programs	164
Cleaning Solutions, Fiber Optic	105-107	Fiber, Specialty	95	Power Meter & Light Source	34, 40-43	Training Schedule	165
Cleaning Wipes, Fiber Optic	104-107	Fish Tape/Poles	123	Power Meter/Light Source Rentals	166		
Cleavers, Fiber Optic	60, 61	Flush Mount Patch Frame	64	Precision Cleavers	60		
Closures, Outdoor, Splice	82-85, 88-92	Furcation Tubes	102	Pre-loaded Distribution Interconnects	67, 68		
Cloud Gateways/Consoles	159	Fusion Splice-On Connectors	50, 51, 55, 59	Probe, Inspection	21, 27, 30, 31, 44, 45		
Compact Node Cables	14	Fusion Splicer Rentals	166	Protection Sleeve Heater	49		
Connectors, Fiber Optic	129-135	Fusion Splitters	50-53, 56-59	Pulse Boxes, Test	35		
Connector Boots	136	Glasses, Safety and Magnifying	121, 122	Quick Termination Connectors	129-131		
Connector Cleaner Cartridges	108	G PON OLTs/ONUs	158	Rack & Wall Mount Enclosures	64-69, 72-75		
Connector Epoxy	138	Handholes / Vaults	92	Rack Mounts, Custom	67, 68		
Connector Ferrules	152, 153	Hand Tools	116-122	Racks, Cable Management	69, 77, 79		
Connector Heat Ovens	139	Heat Gun	122	Rentals	166		
Connector Removal Tools	122			Ribbon Cable	96		

TRAINING

Fiber Optic Lab Manual	165
Fiber Optic Training Posters	165
Textbooks	165
Training Programs	164
Training Schedule	165

FIS SATISFACTION GUARANTEED POLICY

If you are not 100% satisfied with your order, call toll-free to arrange for an exchange or return of goods. Any stock items contained in this catalog may be returned upon your prompt inspection of received goods.*

Any discrepancies with an order must be reported to FIS within 24 hours of receipt. Return Merchandise Authorization (RMA) numbers must be requested within 3 days of receipt of your product and returned to FIS head office within 7 days from receipt of goods. All product returned must be marked with an FIS RMA number and be new and in unopened, full shipping unit quantities. Credit cannot be issued without an FIS authorized RMA.

*Non-Standard ("Custom") Products, as defined by FIS as Products that are special orders, custom orders, and orders for non-standard products, products not customarily in stock or orders for value-added products are non-cancellable and non-refundable. Custom cut cable ordered in error is non returnable. Custom made and un-cataloged items will not be accepted for return. FIS reserves the right to charge a re-stocking fee.

Order Information: Minimum Order: \$50.00. Terms: 30 days net. FOB: Oriskany, New York. Amex, Discover, Mastercard and Visa accepted. In all cases freight will be charged for all product shipped. Overdue accounts are subject to a 2% monthly finance charge. In case of price deviations, notification will be made prior to processing of your order. Photographs may not accurately portray present product. Specification sheets available on most catalog items. Quantity discounts available on all items upon request. First time orders for new accounts cannot be processed unless accompanied by a completed credit application. Please allow 3 working days for your application to be processed. TERMS: Net 30 days from date of invoice unless otherwise stated.

IMPORTANT NOTICE: Prices subject to change without notice. All statements, technical information and recommendations related to the Seller's products are based on information believed to be reliable, but the accuracy or completeness thereof is not guaranteed. Before utilizing the product, the user should determine the suitability of the product for its intended use. The user assumes all risks and liability whatsoever in connection with such use. Any statements of recommendations of the Seller which are not contained in the Seller's current publication shall have no force or effect unless contained in an agreement(s) signed by an authorized officer of Seller.

PRICE NOTICE: FIS will strive to maintain the prices as listed within this catalogue, however, in the event FIS experiences unexpected price increases from their vendors or related suppliers, or in the event of supply chain disruption, FIS reserves the right to update pricing to account for the change in market or supply chain costs. The prices as listed within this catalogue are subject to change.

Terms and Conditions

The Standard Terms and Conditions of Sale ("Terms") as published at <https://www.fiberinstrumentsales.com/docs/Fiber-Instrument-Sales-Standard-Terms-Conditions.pdf> are applicable to all quotes, bids and sales of products and goods by Fiber Instrument Sales, Inc. to the Customer. Except as otherwise provided for therein, these Terms may only be modified or amended upon a mutual written contract amendment signed by authorized representatives of both Supplier and Buyer. No oral agreements or representations shall be valid or binding upon the Supplier or Buyer. Supplier may update, amend, modify or supplement such Terms from time to time upon prior notice to Buyer.

Warranty Overview

Fiber Instrument Sales Inc, hereafter referred to as FIS, warrants that a product will be free from defects in materials and workmanship and conforms to FIS Specifications. The warranty period for a product is a specified, fixed period commencing on the customer's date of purchase. A valid proof of purchase may be required. If the customer does not have a valid proof of purchase, the warranty period will be measured from the date of sale indicated within FIS records. If, during the warranty period, the product is not in good working order, FIS may, at its option, repair or replace it at no additional charge, except as is set forth below.

The warranty period for products sold and manufactured by FIS is as follows:

- All products, excluding test and fiber splicing equipment: 30 Days
- Distributed test and fiber splicing equipment: Original manufacturer's warranty applies
- FIS manufactured test and fiber splicing equipment: 1 year

Items Not Covered by Warranty

FIS does not warrant uninterrupted or error-free operation of product or equipment. Unless specified otherwise, FIS references the original equipment manufacturer's warranty and its subsequent requirements on non-Fiber Instrument Sales Inc. products. Any technical or other support provided for a product under warranty, such as assistance via telephone with "how-to" questions and those regarding use, setup and installation, will be provided WITHOUT WARRANTIES OF ANY KIND.

Extent of Warranty

The warranty does not cover the repair or exchange of a product resulting from misuse, accident, modification, unsuitable physical or operating environment, improper maintenance by the customer, or failure caused by a product for which FIS is not responsible. The warranty may be voided by removal or alteration of product, parts, security or identification labels. Distributed products not manufactured by FIS will be replaced or credited if determined to be defective, not including labor or any associated cost of repair or replacement.

THESE WARRANTIES ARE THE CUSTOMER'S EXCLUSIVE WARRANTIES AND REPLACE ALL OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THESE WARRANTIES GIVE THE CUSTOMER SPECIFIC LEGAL RIGHTS AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM JURISDICTION TO JURISDICTION. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF EXPRESS OR IMPLIED WARRANTIES, SO THE ABOVE EXCLUSION OR LIMITATION MAY NOT APPLY TO THE CUSTOMER. IN THAT EVENT, SUCH WARRANTIES ARE LIMITED IN DURATION TO THE WARRANTY PERIOD. NO WARRANTIES APPLY AFTER THAT PERIOD.

Warranty Service

Warranty service may be obtained from FIS by returning a Return Material Authorization Form (RMA), during the warranty period for the FIS - manufactured product, to FIS's Quality Assurance Manager. The customer may be required to present proof of purchase or other similar proof of warranty entitlement. The customer may be responsible for any associated transportation charges, duties and insurance. The product, once arriving at FIS, will be evaluated to determine cause of failure, with warranty action determined from evaluation.

Fiber Instrument Sales, Inc.
161 Clear Road
Oriskany, NY 13424

Standard
U.S. Postage
PAID
Fiber Instrument
Sales, Inc.

Где купить:

ООО "КОМПАНИЯ ОПТУЛС"

г.Москва, ул.Бирюлёвская, д.53, корп. 2, офис 113

Tel.: +7 (495) 646-00-96

E-Mail: sale@opttools.ru

Internet: www.opttools.ru



ASSOCIATIONS:



PARTNERS:



161 Clear Road, Oriskany, NY 13424
Outside the US: 1-315-736-2206

Fax: (315) 736-2285
Email: info@fiberinstrumentsales.com