




SEIKOH GIKEN

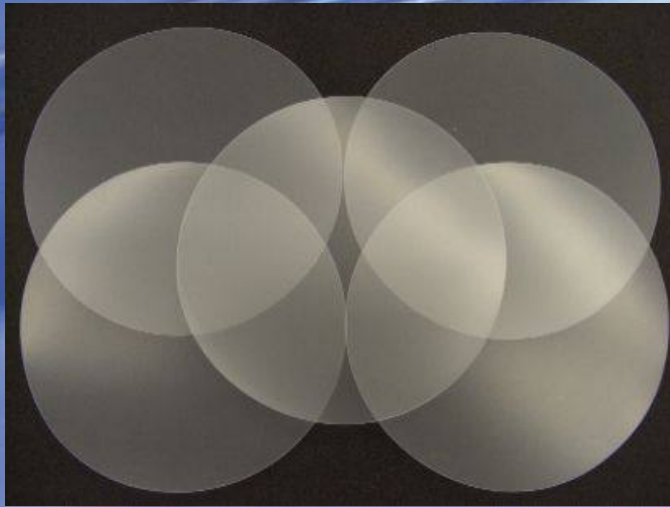

New Final Polishing Film

■ Features


- Stable fiber height over use of film life *for both 2.5mm and 1.25mm polishing*
- Scratch less polishing
- Use only purified water
- Designed to provide GR-326 endface geometry
- Lasts longer compared to exiting finishing films
- Easily achieve cost reduction by longer service life
- Ideal for UPC and APC quality polishing

■ Specifications

Part Number	XF5D, KJW101530G, XF07
Material	SiO ₂
Diameter	127mm, 110mm, 70mm
Color	Translucent
Application	2.5mm and 1.25mm Zr. Ferrule
Film Life	5 to 10 times
Package	100pcs / set
Storage Condition	Temp: 10~30°C Humid: 30~70%

■ Test Data

Polisher : SFP-550
 Holder : PH55-FF-20
 Polishing Time : 1.0min
 Polishing Liquid : Purified water

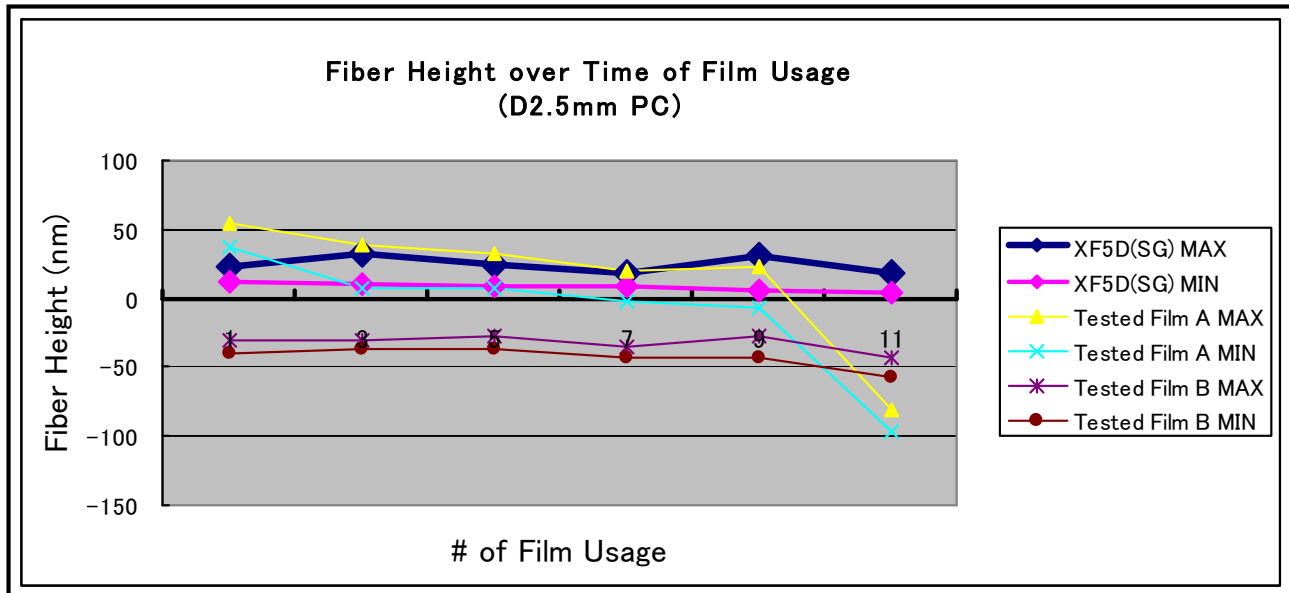

Note: Data in this sheet was under the condition of using SG polishing machine and process.

XF5D film shows consistent & closest 0nm fiber height results over times of use compared with other tested finishing films.

■ Ordering Information

Part Number	Description	Sheet / pack
XF5D	127mm (5") Final Polishing film	100
KJW101530G	110mm Final Polishing film	100
XF07	70mm Final Polishing film	100

WORLDWIDE SUBSIDIARIES AND SALES OFFICES:

Где купить:
 ООО "КОМПАНИЯ ОПТУЛС"
 г.Москва, ул.Иловайская, д.3, стр.2
 Tel.: +7 (495) 646-00-96
 E-Mail: sale@opttools.ru
 Internet: www.opttools.ru